FULL SIZE C/K LD PICKUPS

Model Symbol Chart....1
General Information....See Light Duty BBM "General Information" section
General Instructions....See Light Duty BBM "General Instruction" section
Camper Loading....See Online Order/Ref. Guide – "GM Consumer Info. Truck-Camper Loading"
Pickup Box Removal....See Light Duty BBM "Special Applications – Pickup Box Removal Program" section
Snow Plow Prep. Pkg....See Light Duty BBM "Special Applications – Snow Plow Prep Package" section
Trailering Information....See Light Duty Online Order/Ref. Guide – "Light Duty Trailering Specs"
Model and Option Weights....See Light Duty Online Order/Ref. Guide – "Model and Opt. Weights" & "Weight Calculator"

VEHICLE
- GENERAL ARRANGEMENT
  - Regular Cab....2
  - Extended Cab....3
  - Crew Cab....4
- Body/Cargo Weight Distribution – 6' 6"....5
- Body/Cargo Weight Distribution – 5' 8"....6
- Body/Cargo Weight Distribution – 8'....7

BODY – EXTERIOR
- GENERAL ARRANGEMENT
  - Regular Cab, 6' 6" Box – C/K 15703....8
  - Regular Cab, 8' Box – C/K 15903....9
  - Extended Cab, 6' 6" Box – C/K 15753....10
  - Crew Cab, 6' 6" Box – C/K 15743....11
  - Crew Cab, 5' 8" Box – C/K 15543....12
- FRONT END CLIPS
  - C/K 100 (03/53/43)....13
- HOOD OPENINGS
  - C/K 100 (03/53/43)....14

BODY – EXTERIOR – *Continued*

HOOD PROFILES

Chevy X88 – C/K 100 (03/53/43) 15

GMC Z88 – C/K 100/200/300 (03/53/43) 16

REAR BACK OF CAB SILHOUETTE

Pickup 17

SIGN AREA

Regular Cab – C/K 100/200/300 (03) 18

Extended Cab – C/K 100/200/300 (53) 19

Crew Cab – C/K 100/200/300 (43) 20

CAB STEP IN HEIGHTS

Regular Cab (03) 21

Extended Cab (53) 22

Crew Cab (43) 23

MIRRORS, OUTSIDE REARVIEW

C/K 1000, Option DL8 and C/K 2000, Option DE 2 24

CAB CLEARANCE LAMPS, CHMSL AND REAR CAB WINDOW

Fixed and Sliding 25

CAB PRESSURE VALVE ASSEMBLY

Rear Quarter Body Panel 26

PICKUP BOX

Side Rail Load Points/Paths – Structural Members 27

Side Rail Load Points/Paths – Primary/Secondary Load Points 28

Side Rail Load Points/Paths – Stake Pocket Openings & Front Structure 29

Side Rail Load Points/Paths – Stake Pocket Openings & Rear Structure 30

Length and Width Dimension for 5' 8", 6' 6" and 8' 31

Inside Panel, 5' 8" Box 32

BODY – EXTERIOR – PICKUP BOX – *Continued*

Cross Sills Location, 5' 8" Box 33
Inside Panel, 6' 6" Box 34
Cross Sills Location, 6' 6" Box 35
Inside Panel, 8' Box 36

CAB – INTERIOR

SEATING ARRANGEMENT

Seating Positions and H Points 1st Row Front View, Pickups – C/K 100/200/300 (03/53/43) 37
Seating Positions and H Points 2nd Row Front View, Pickups – C/K 100/200/300 (03/53/43) 38
Seating Positions and H Points Side View, Pickups – C/K 100/200/300 (03/53/43) 39

SEAT MOUNTING HOLES LOCATIONS – FLOOR

C/K 100/200/300 (03/53/43) 40
C/K 15743 41

CHASSIS

DATUM HOLE LOCATION – FRAME

C/K 100 (00) and C/K 200 (00) (00) 42

FRAME RAIL AND CROSSMEMBER LOCATION

C/K 15703 43
C/K 15903 44
C/K 15753 45
C/K 15743 46
C/K 15543 47

SPARE TIRE LOCATION

C/K 1000 Series Pickups 48

CHASSIS – *Continued*

PLATFORM HITCH

Pickups C/K 100 (03/53/43) 49

FRONT AXLE/TIRE DATA

Front Axle Tire Data Drawing – C/K 10000 Pickups 50

Front Axle Tire Data Chart – C/K 10000 Pickups 51

REAR AXLE/TIRE DATA

Rear Axle Tire Data Drawing – C/K 10000 Pickups 53

Rear Axle Tire Data Chart – C/K 10000 Pickups 54

FUEL SYSTEMS

C/K 15703 56

C/K 15903 Pickup 57

C/K 15743, 15753 and C/K 15543 Pickups 58

EXHAUST SYSTEMS

C/K 100 (00) w/LV3 (4.3L V6) 59

C/K 100 (00) w/L83 (5.3L V6) 60

C/K 100 (00) L86 (6.2L V8) 61

FULL SIZE C/K LD PICKUPS

Model Symbol Chart

MARKETS (Optional)	ENGINEERING MODEL	REGULAR CABS (03) 2 DOOR CHEVROLET / GMC	EXTENDED CABS (53) 4 DOOR CHEVROLET / GMC	CREW CABS (43) 4 DOOR CHEVROLET / GMC	GVWR (kg/lbs)	WHEELBASE (mm/in)	CAB-TO-AXLE (mm/in)
	C155			+ E63 5’ 8” Box	3130/6900 3175/7000 3356/7400	3645/143.5	825.5/32.5
	C157	+ E63 6’ 6” Box			2948/6500 2994/6600 3039/6700	3023/119.0	1067/42
			+ E63 6’ 6” Box		3130/6900 3175/7000 3356/7400	3645/143.5	1067/42
				+ E63 6’ 6”Box	3130/6900 3175/7000 3356/7400	3886/153.0	1067/42
	C159	+ E63 8’ Box			3039/6700 3084/6800	3378/133.0	1422/56
	K155			+ E63 5’ 8” Box	3220/7100 3266/7200 3447/7600	3647/143.5	825.5/32.5
	K157	+ E63 6’ 6” Box			3039/6700 3084/6800	3023/119.0	1067/42
			+ E63 6’ 6” Box		3220/7100 3266/7200 3447/7600	3647/143.5	1067/42
				+ E63 6’ 6”Box	3220/7100 3266/7200 3447/7600	3886/153.0	1067/42
	K159	+ E63 8’ Box			3130/6900 3175/7000	3378/133.0	1422/56

E63 – Fleetside / Wideside Box (5’ 8”, 6’ 6” and 8’ Boxes)
ZW9 – Chassis Cab
EXAMPLE: C15903 = 2 DOOR REGULAR CAB / FLEETSIDE/WIDESIDE / 8’ BOX

FULL SIZE C/K LD PICKUPS

Regular Cab – General Arrangement

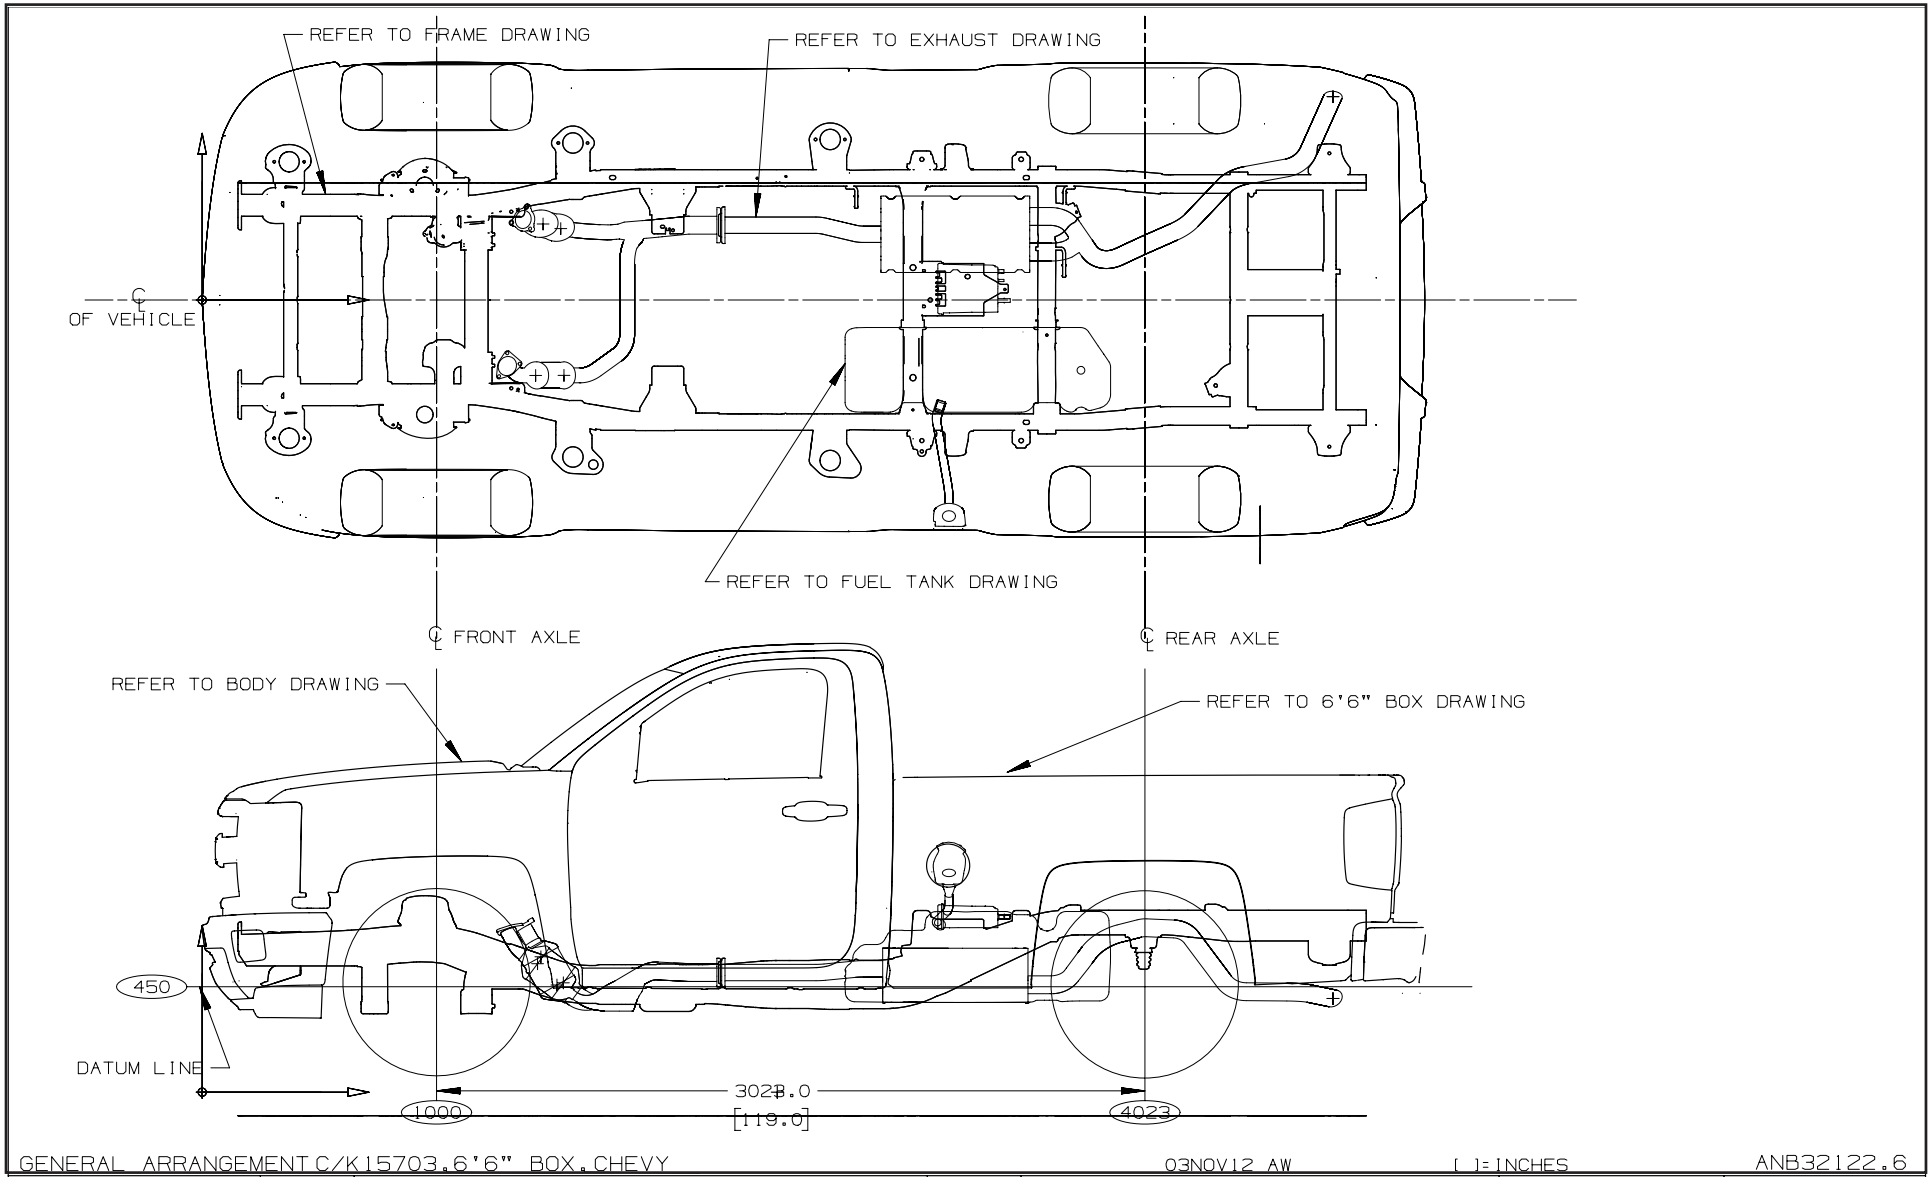

FULL SIZE C/K LD PICKUPS

Extended Cab – General Arrangement

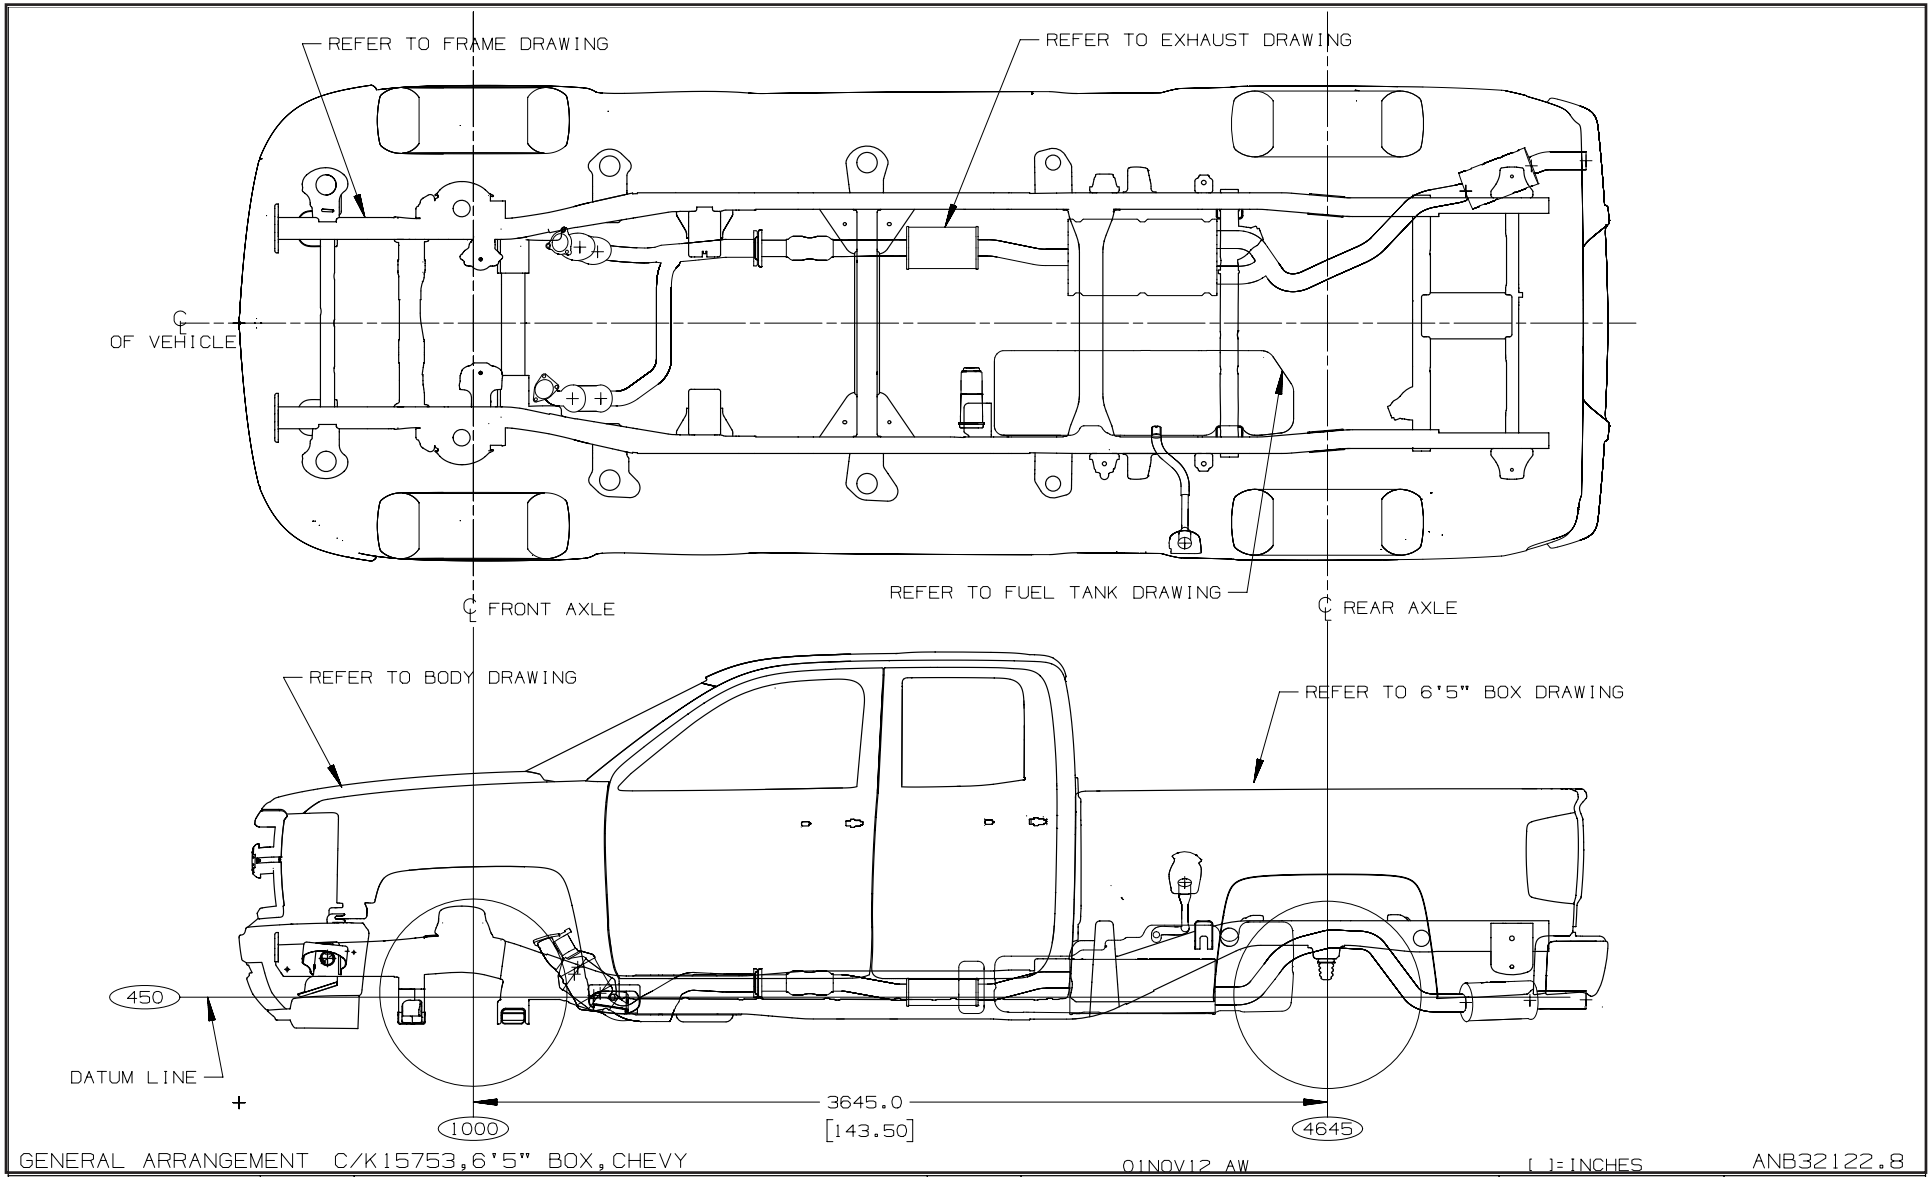

FULL SIZE C/K LD PICKUPS

Crew Cab – General Arrangement

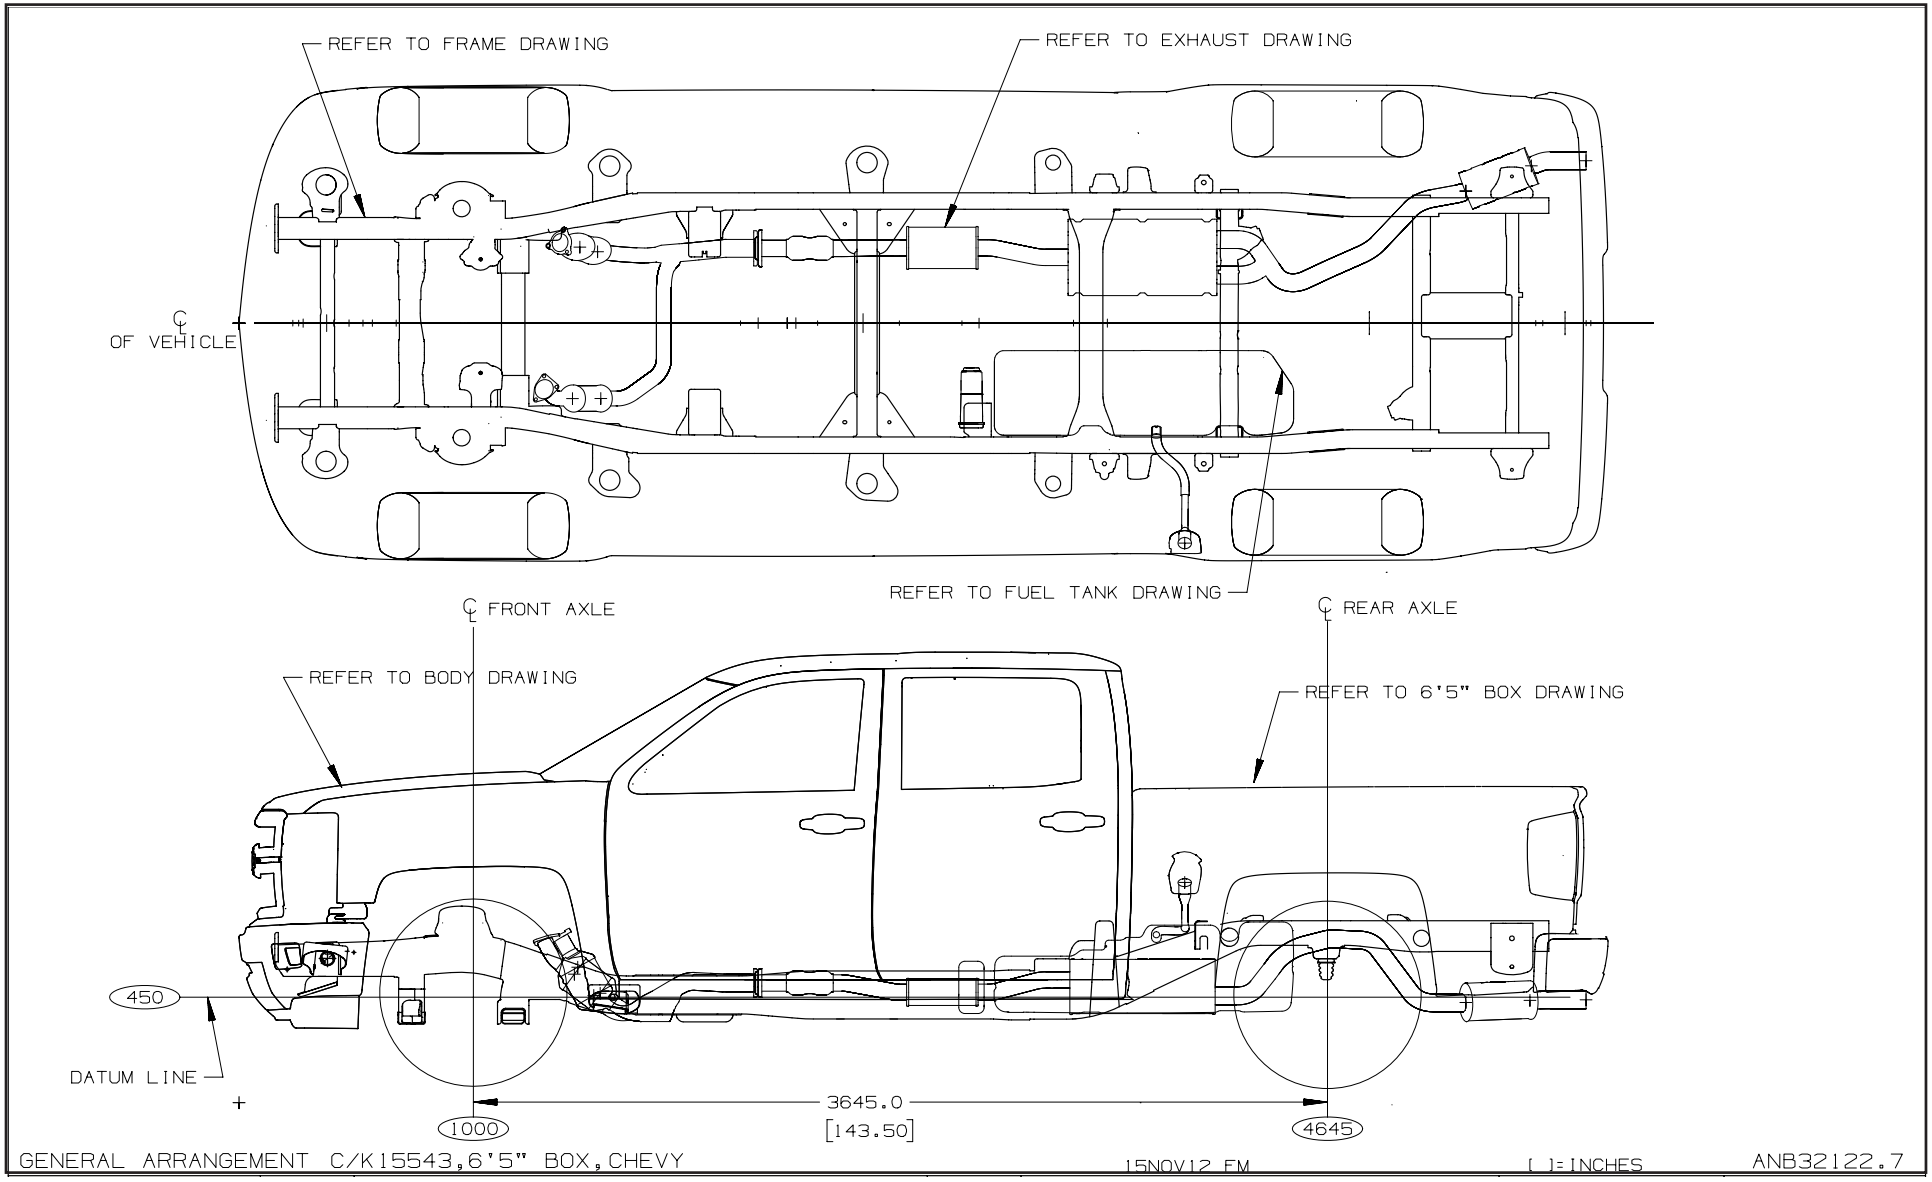

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 6' 6"

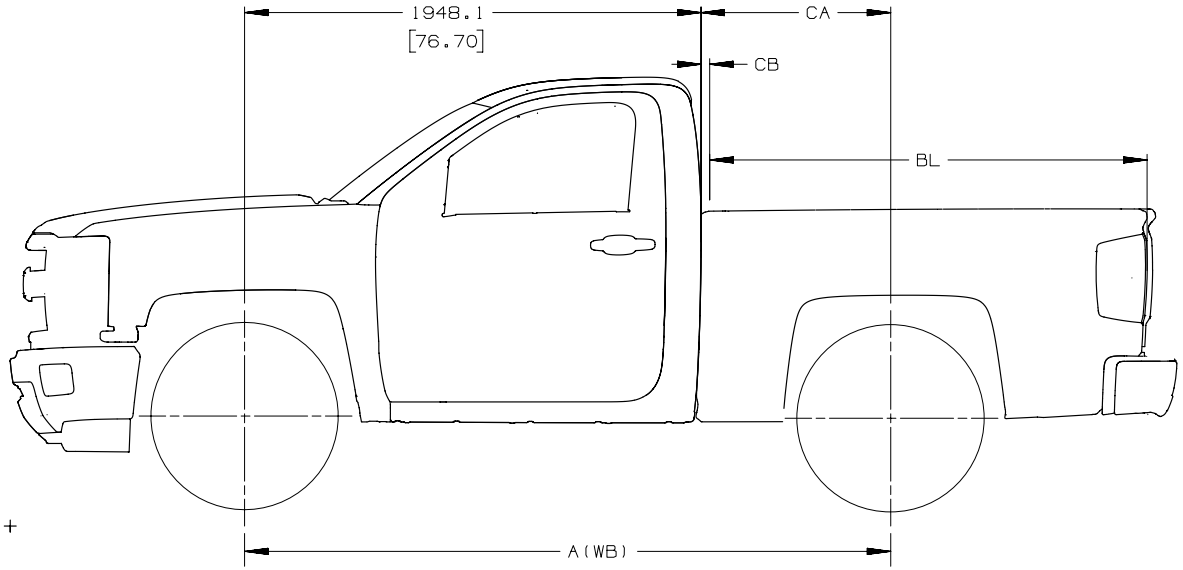

					BODY/CARGO WEIGHT DISTRIBUTION	
MODEL	A(WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15703	3023.0 [119.0]	1075.3 [42.33]	25.4 [1.0]	2062.3 [81.2]	1	99
CK15753	3645.0 [143.5]	1063.4 [41.86]	25.4 [1.0]	2062.3 [81.2]	1	99

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
CA=CAB TO REAR AXLE DIMENSION
CB=BODY CLEARANCE BETWEEN BODY AND CAB
BL=BOX LENGTH
A(WB)=WHEELBASE

$$\frac{\text{CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE}}{\text{WHEELBASE}} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

$$\frac{CA - CB - (BL/2)}{A(WB)} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

BODY/CARGO WEIGHT DISTRIBUTION CK15703 53,6'5" BOX,2014 03NOV12 AW [ ]=INCHES ANC07766.3

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 5' 8"

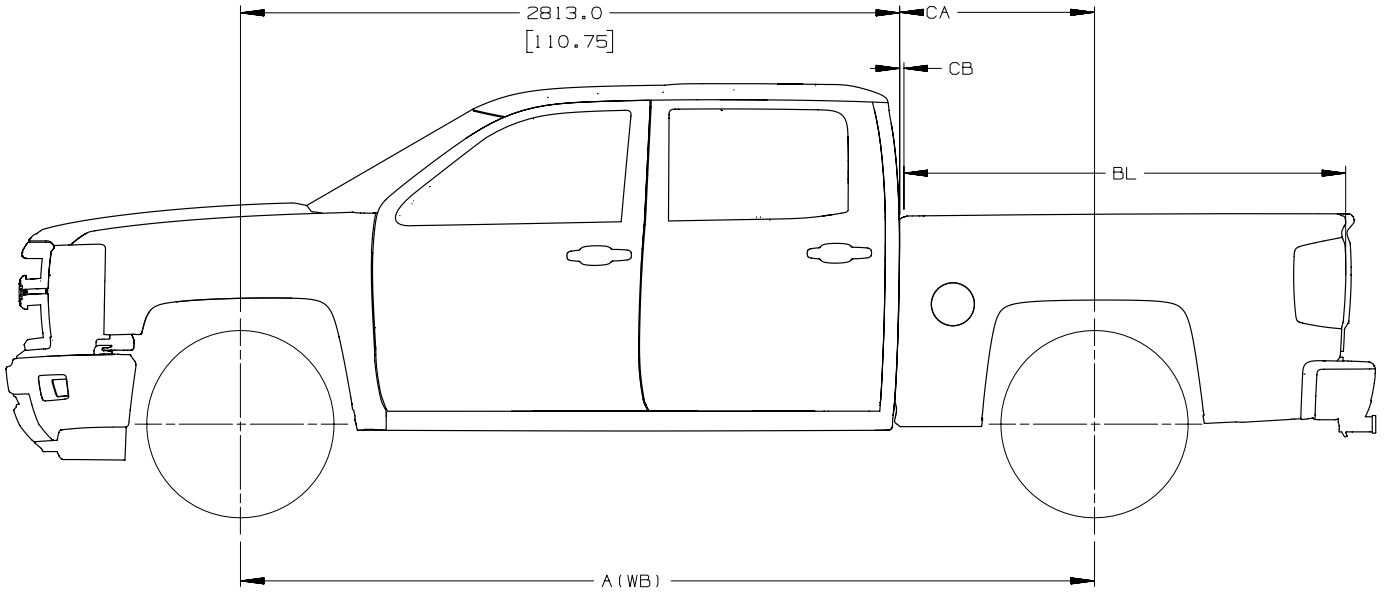

					BODY/CARGO WEIGHT DISTRIBUTION	
MODEL	A(WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15543	3645.0 [143.5]	831.4 [32.73]	25.4 [1.0]	1885.4 [74.23]	-4	104

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
CA=CAB TO REAR AXLE DIMENSION
CB=BODY CLEARANCE BETWEEN BODY AND CAB
BL=BODY(BOX)LENGTH
A(WB)=WHEELBASE

$$\frac{\text{CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE}}{\text{WHEELBASE}} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

$$\frac{CA - CB - (BL/2)}{A(WB)} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

BODY/CARGO WEIGHT DISTRIBUTION CK15543,5'8" BOX,2014 17NOV12 FM [ ]=INCHES ANC07766.4

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 8'

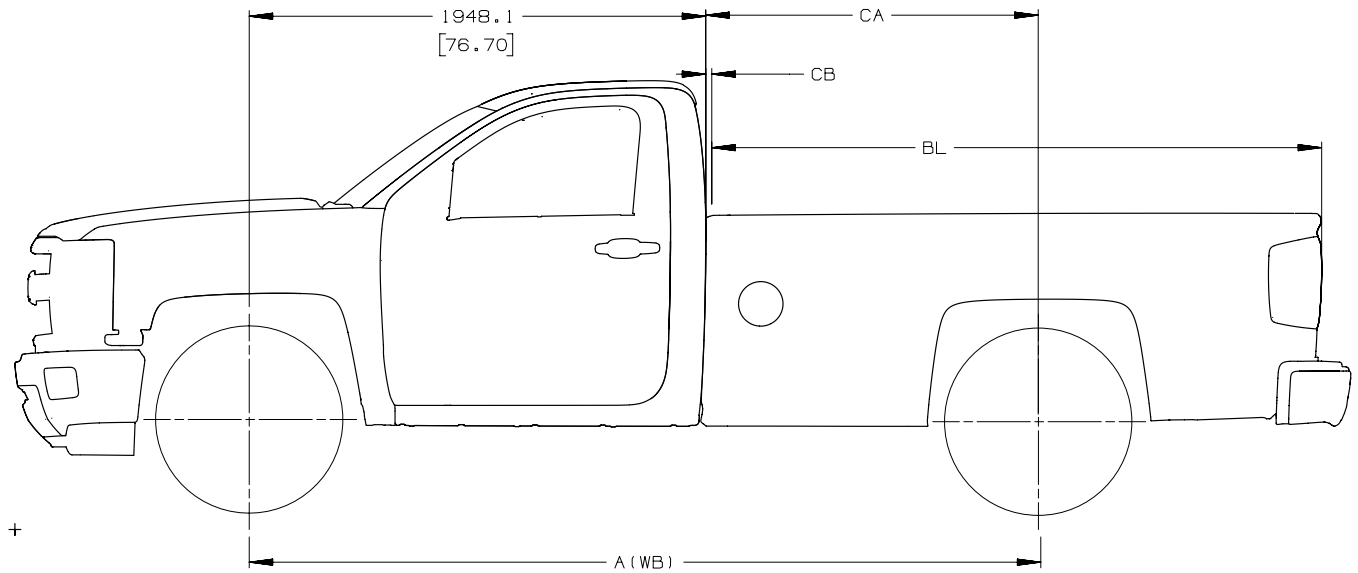

					BODY/CARGO WEIGHT DISTRIBUTION	
MODEL	A(WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15903	3367.91 [132.6]	1422.83 [56.02]	25.4 [1.0]	2627.01 [103.42]	3	97

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
CA=CAB TO REAR AXLE DIMENSION
CB=BODY CLEARANCE BETWEEN BODY AND CAB
BL=BOX LENGTH
A(WB)=WHEELBASE

$$\frac{\text{CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE}}{\text{WHEELBASE}} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

$$\frac{CA - CB - (BL/2)}{A(WB)} \times 100 = \%\ \text{BODY PAYLOAD AT FRONT AXLE}$$

BODY/CARGO WEIGHT DISTRIBUTION CK15903 ,8'.6' BOX,2014 17NOV12 FM [ ]=INCHES ANC07766.5

FULL SIZE C/K LD PICKUPS

C/K 15703, Regular Cab 6' 6" Box – Body General Arrangement

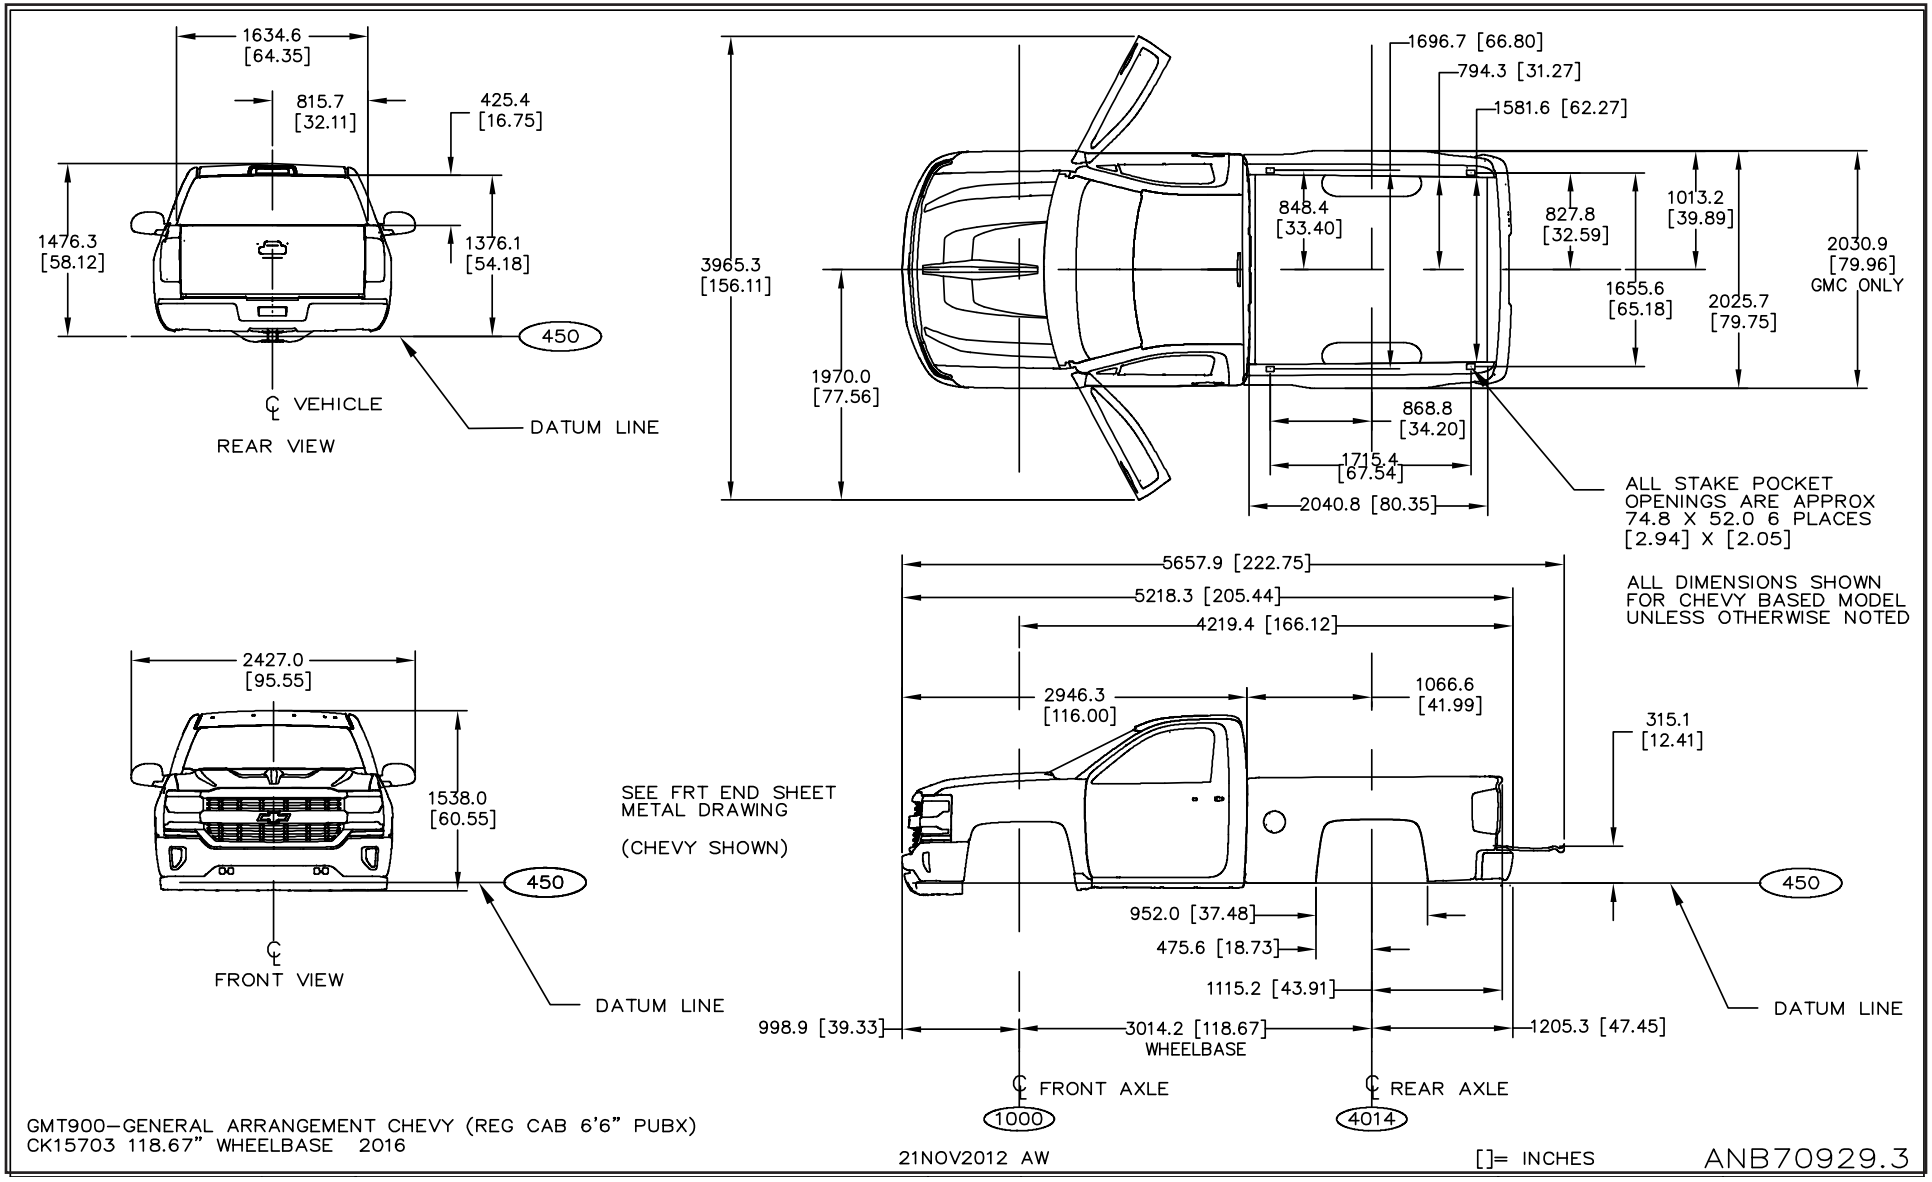

FULL SIZE C/K LD PICKUPS

C/K 15903, Regular Cab 8' Box – Body General Arrangement

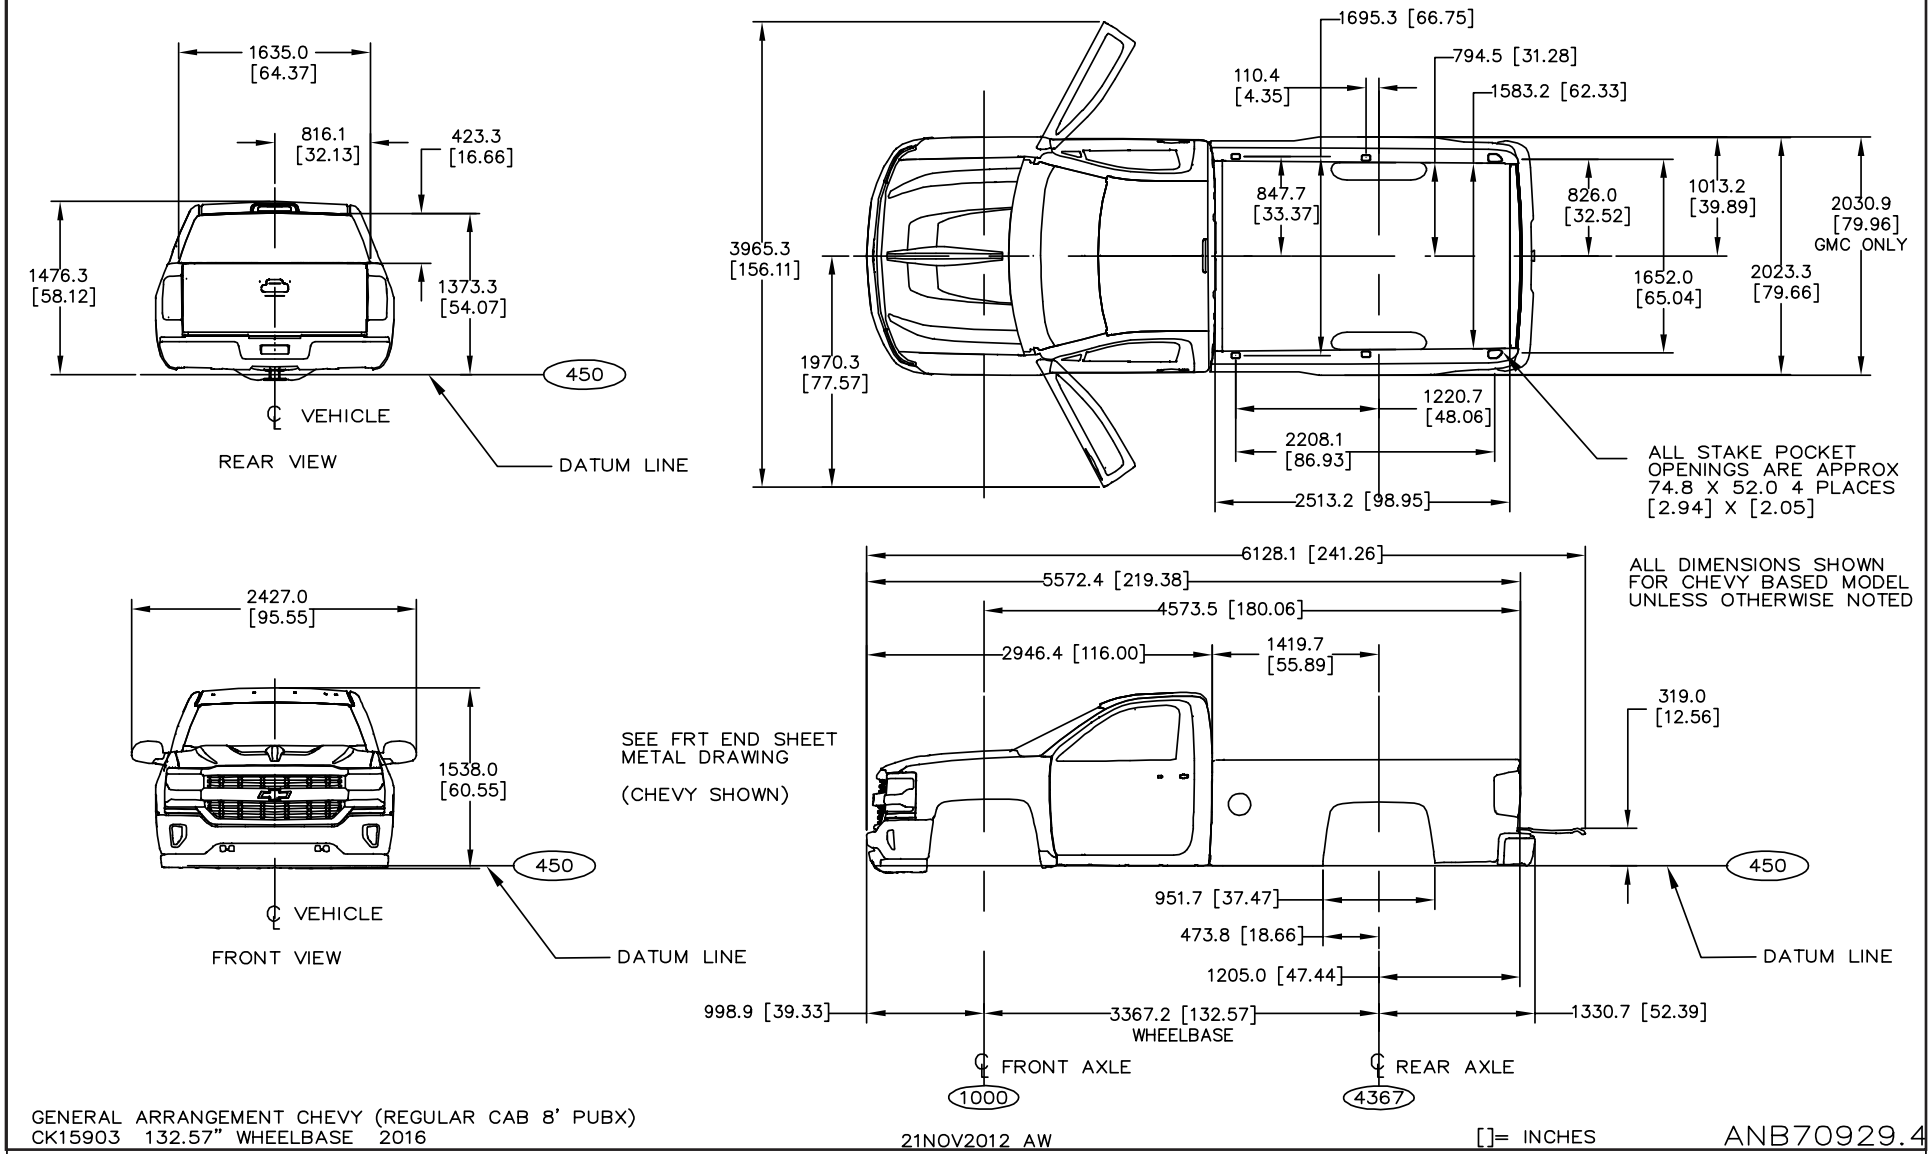

FULL SIZE C/K LD PICKUPS

C/K 15753, Extended Cab 6' 6" Box – Body General Arrangement

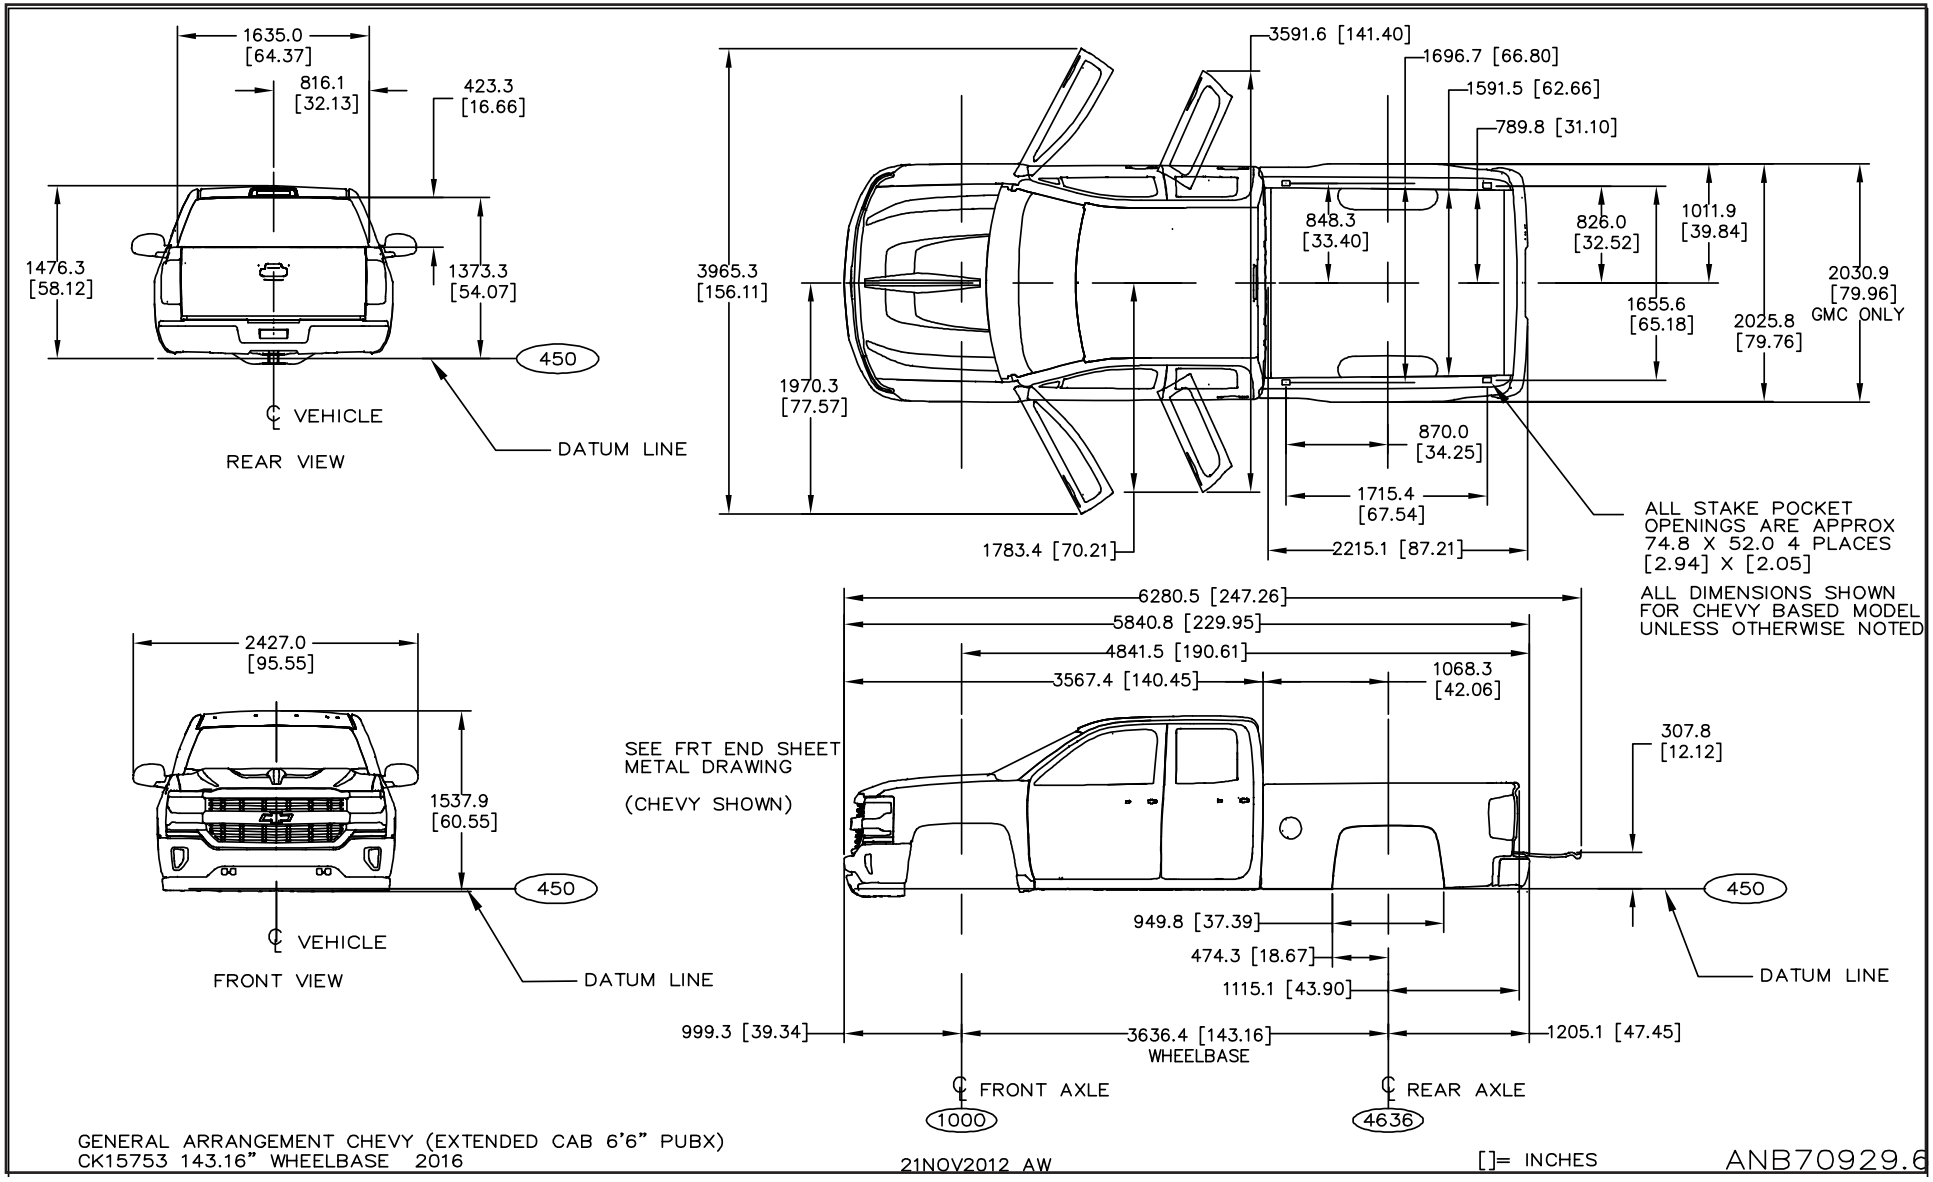

FULL SIZE C/K LD PICKUPS

C/K 15743, Crew Cab 6'6" Box – Body General Arrangement

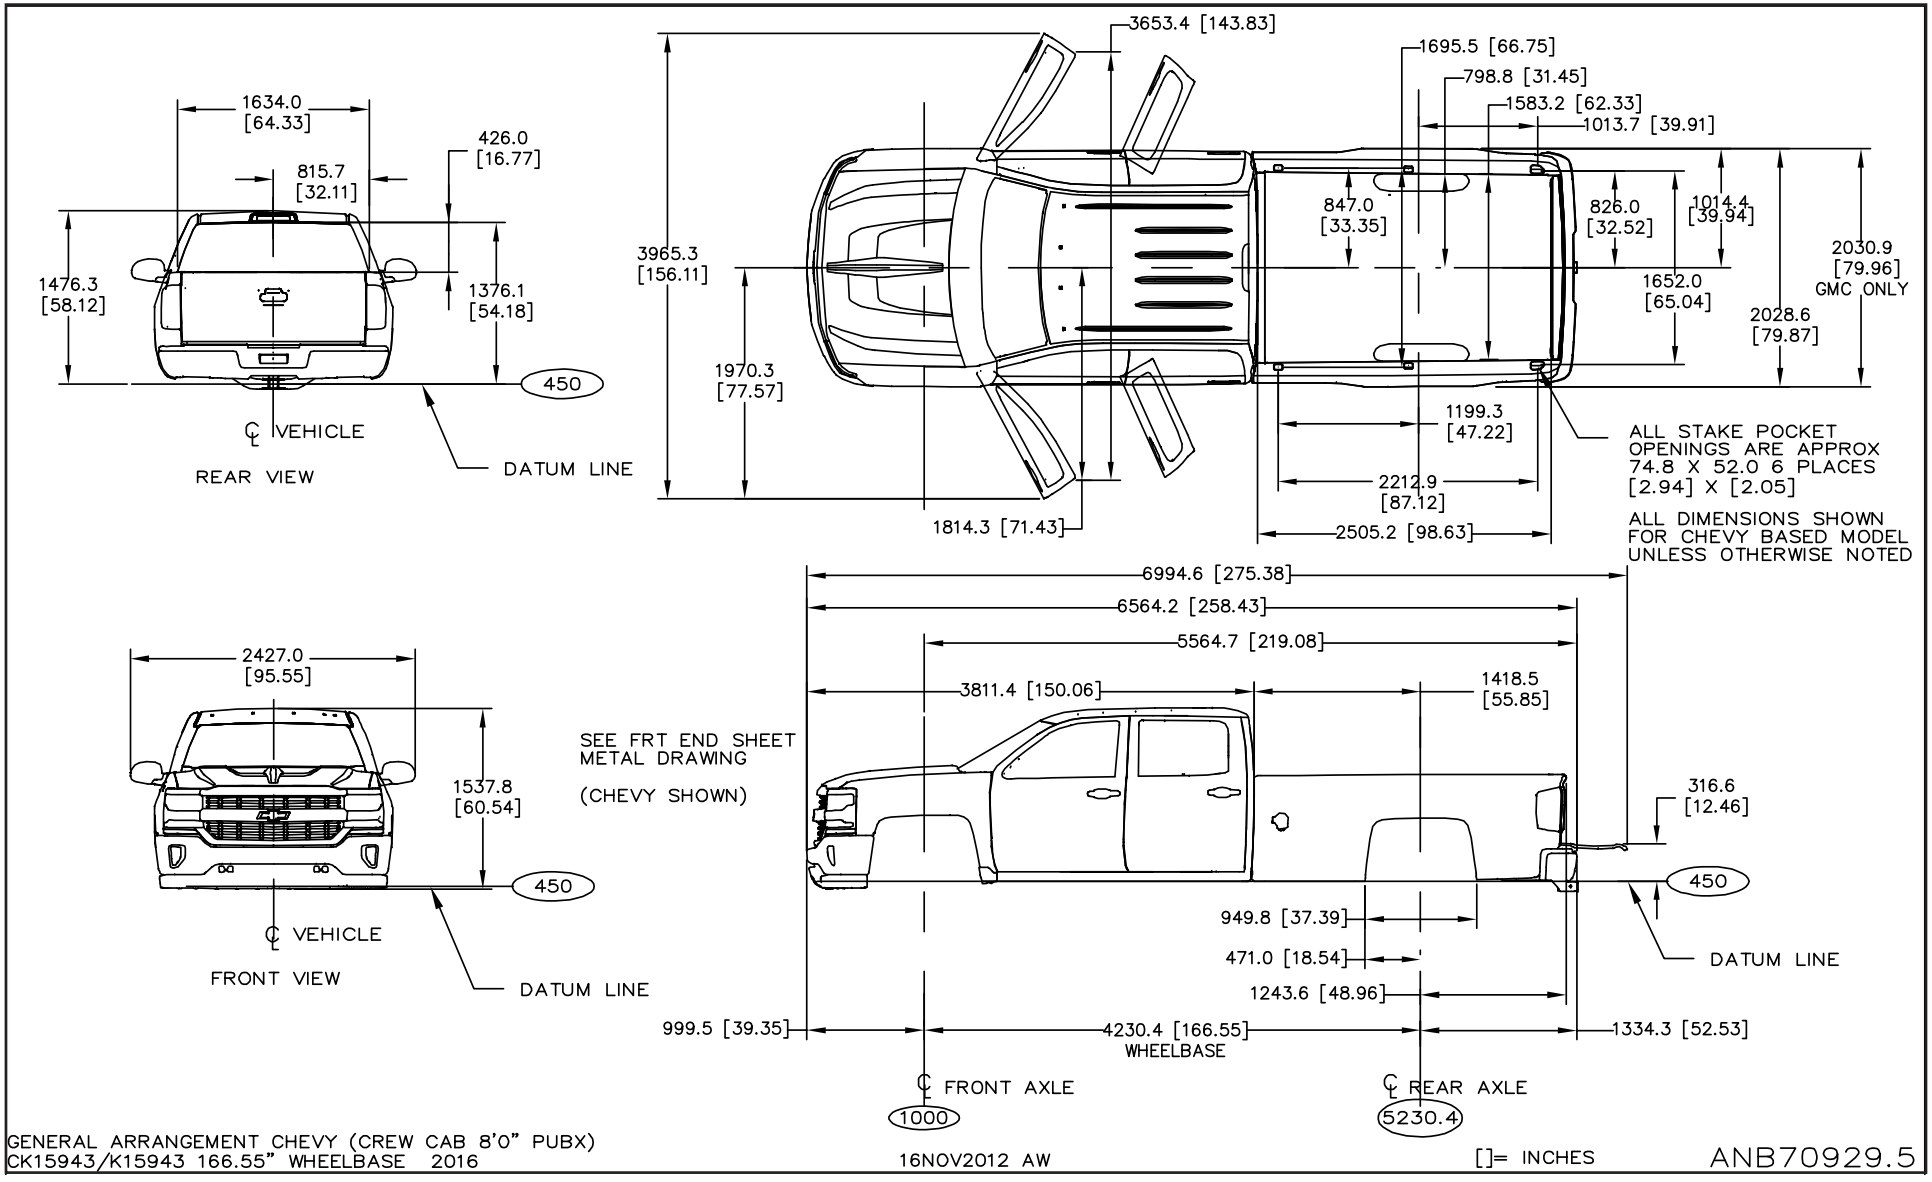

FULL SIZE C/K LD PICKUPS

C/K 15543, Crew Cab 5' 8" Box – Body General Arrangement

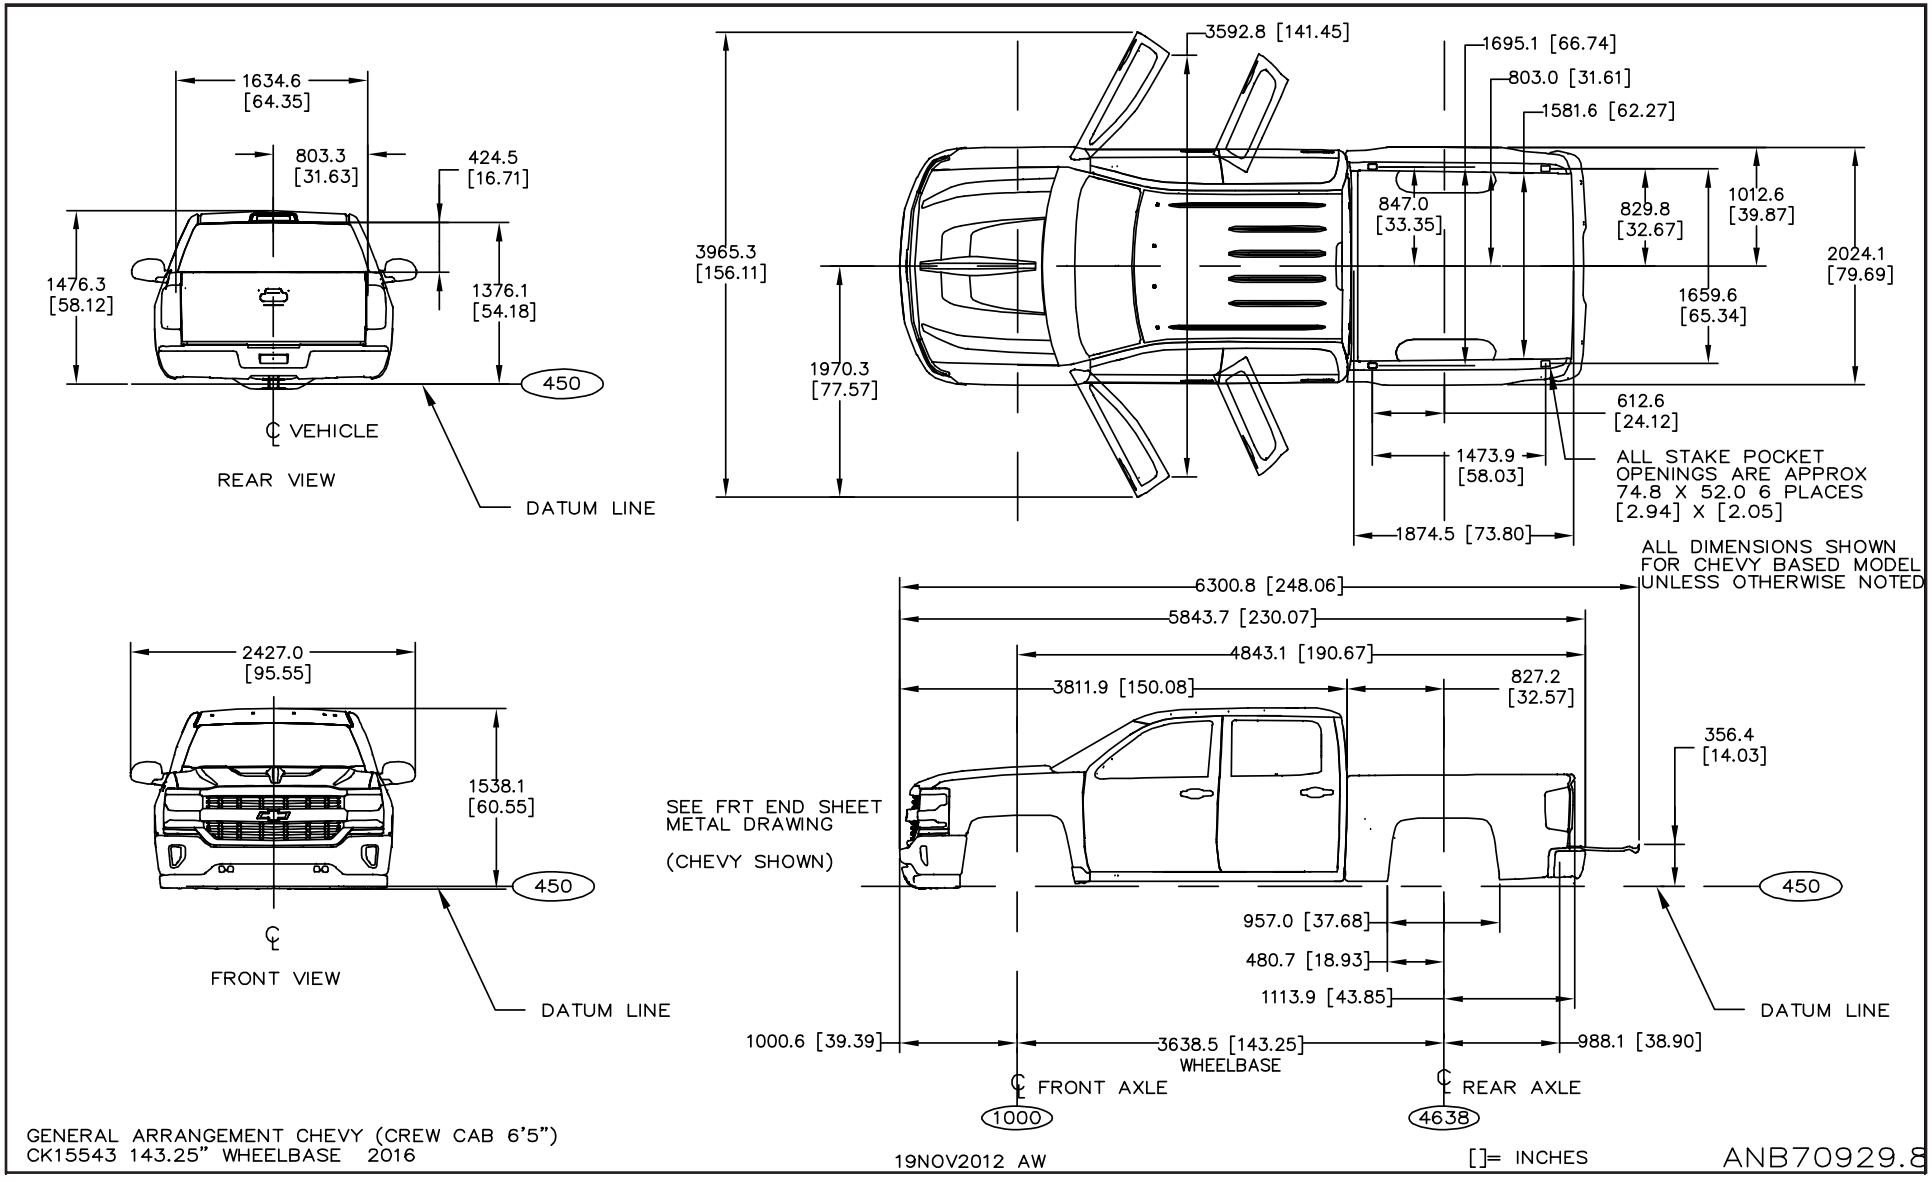

FULL SIZE C/K LD PICKUPS

C/K 100 (03/53/43) – Front End Clips

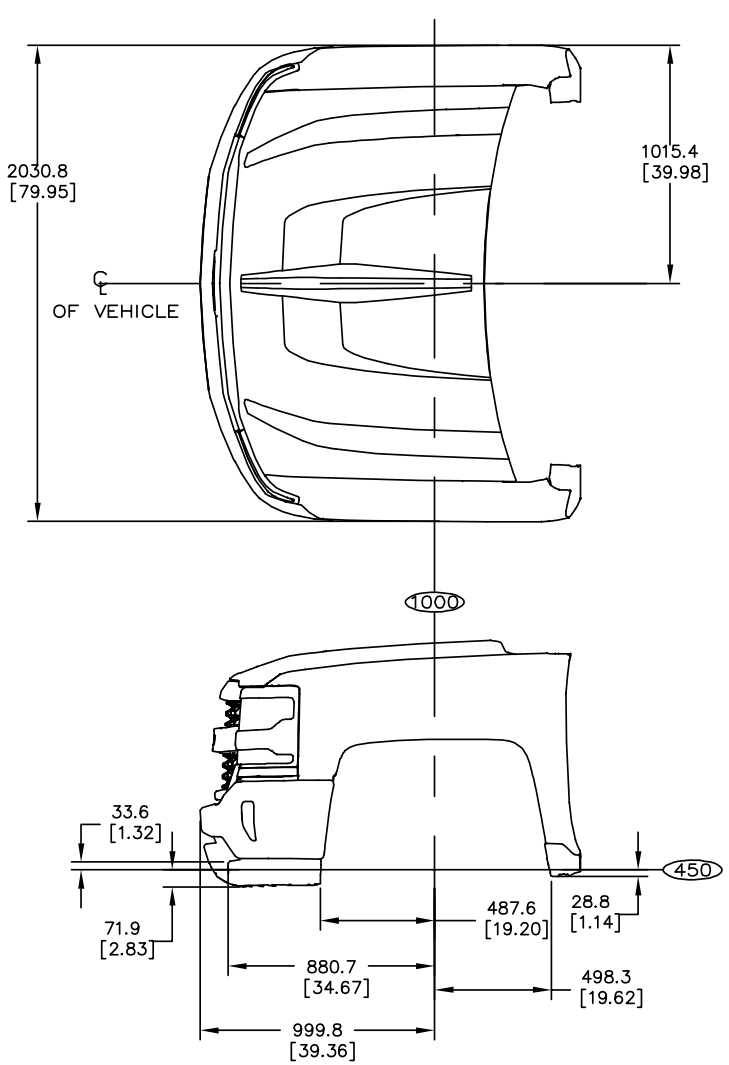

X88: CHEVROLET C/K 100 03/43/53

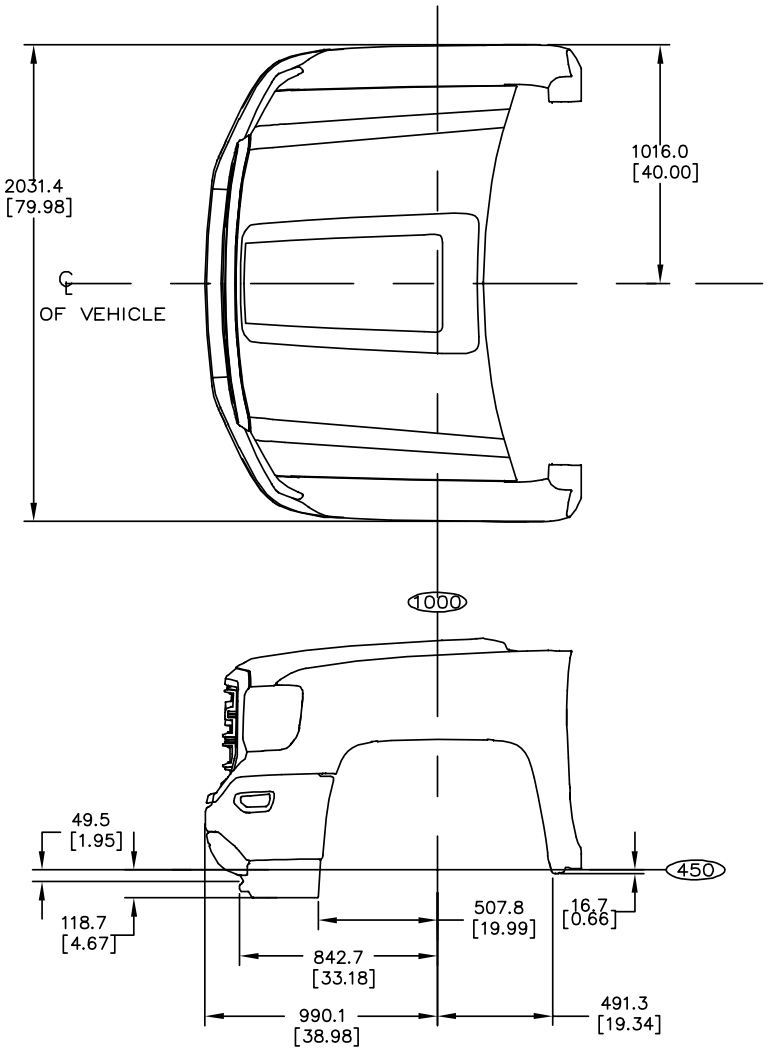

Z88: GMC C/K 100 03/43/53

26NOV12 AW

[]=INCHES

ANB43157.4

FULL SIZE C/K LD PICKUPS

C/K 100 (03/53/43) – Hood Openings

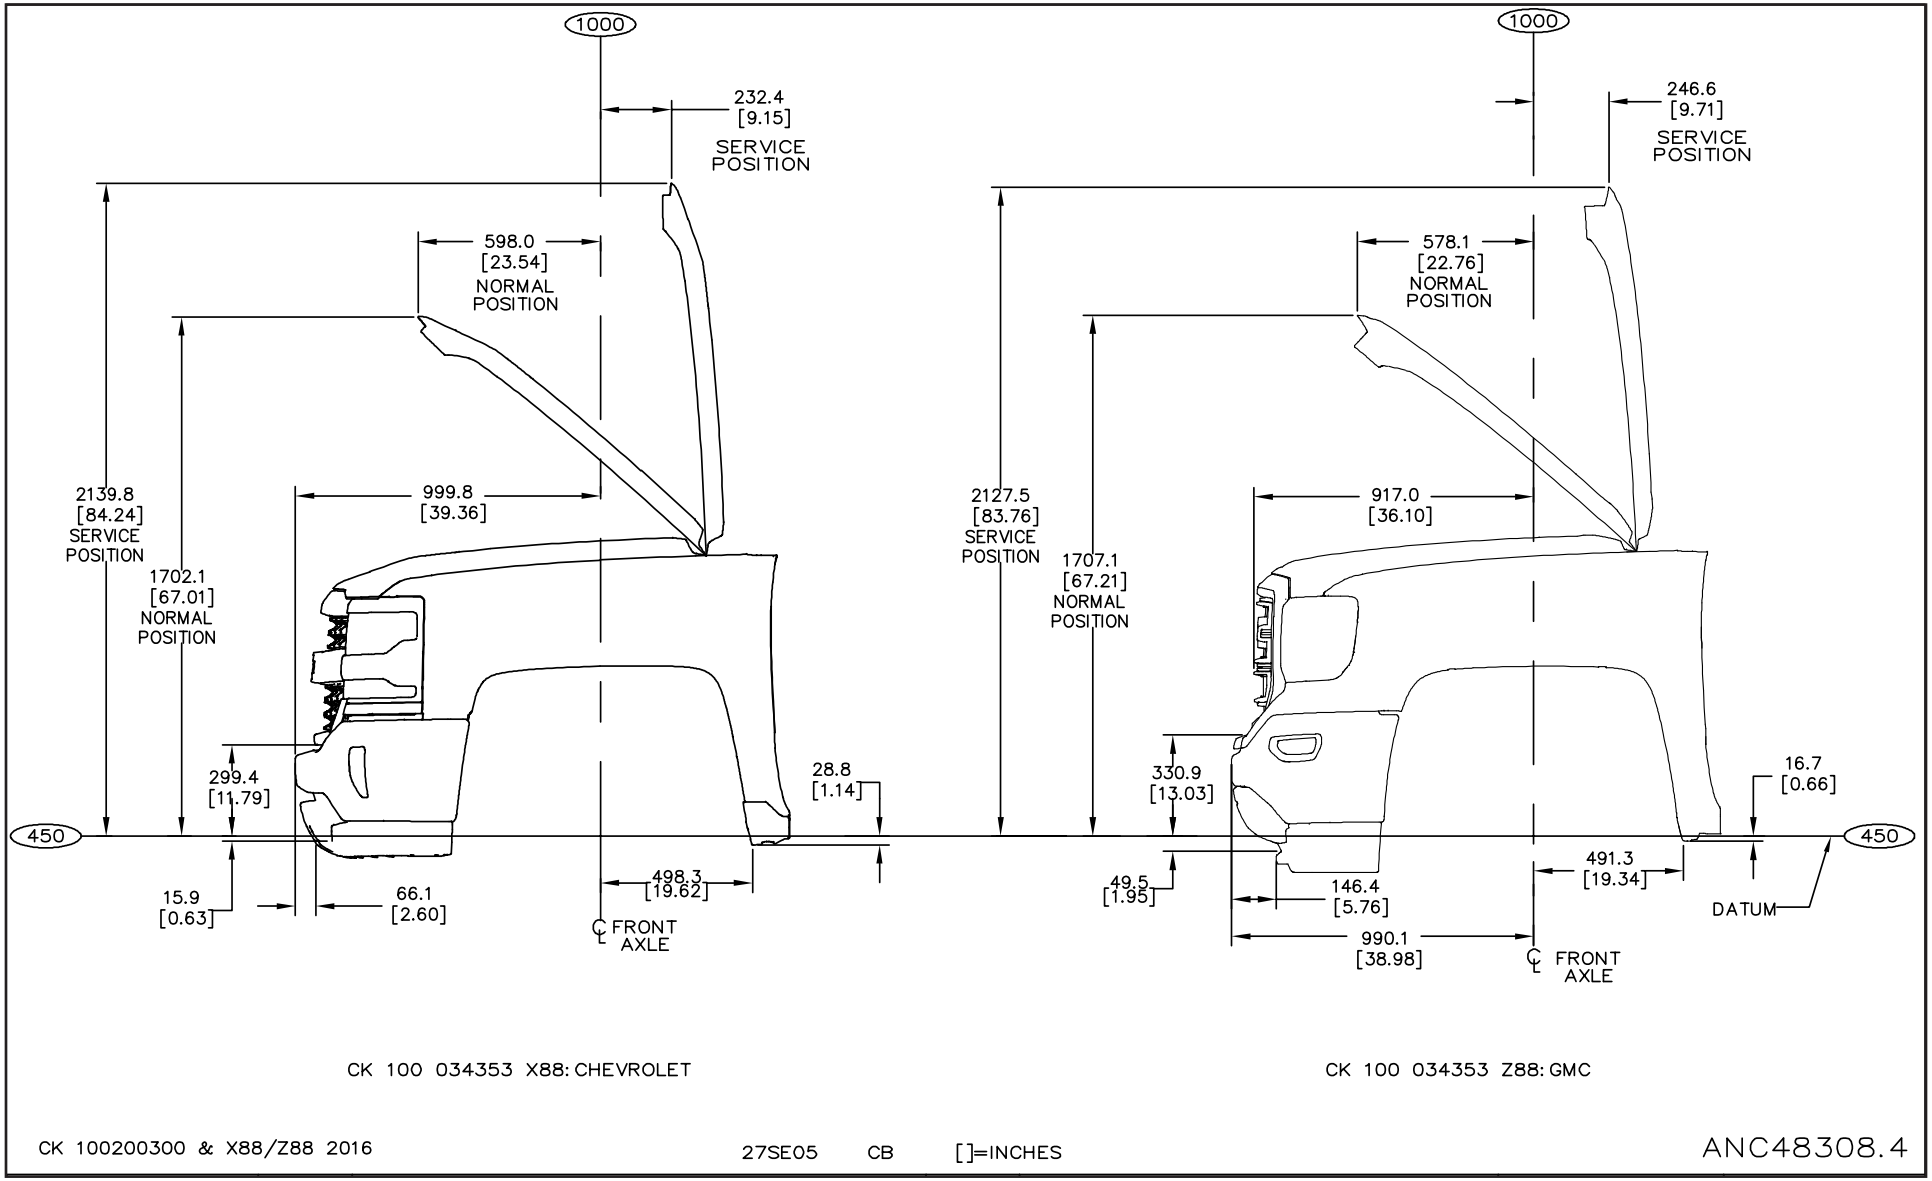

FULL SIZE C/K LD PICKUPS

Chevy X88 – C/K 100 (03/53/43) – Hood Profiles

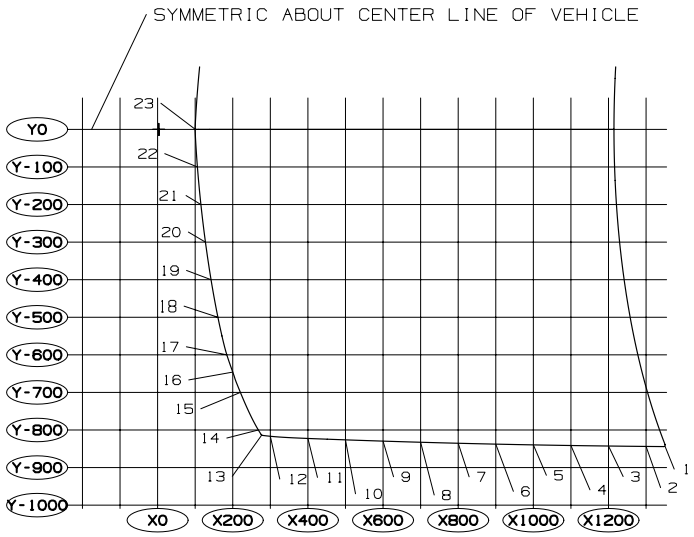

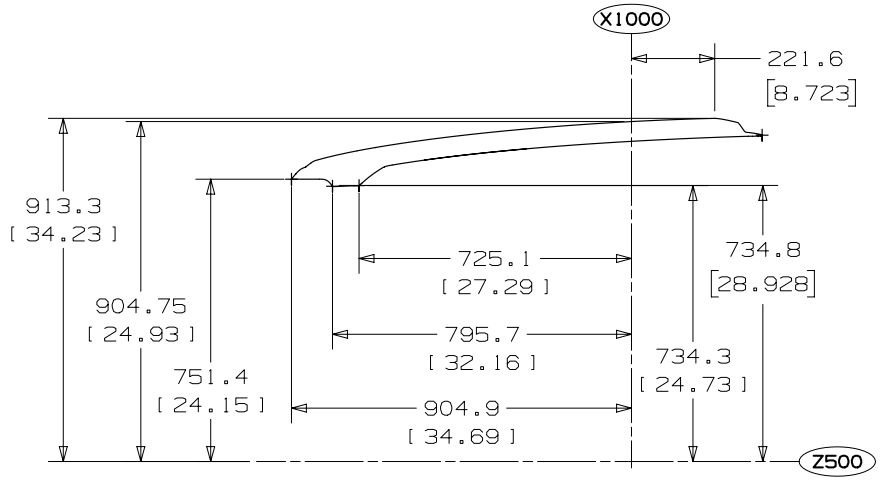

PT. #	LENGTH	WIDTH
1	1350.0	-842.4
2	1300.0	-843.8
3	1200.0	-842.7
4	1100.0	-841.3
5	1000.0	-839.6
6	900.0	-837.6
7	800.0	-835.3
8	700.0	-832.6
9	600.0	-829.6
10	500.0	-826.3
11	400.0	-822.5
12	300.0	-816.7
13	277.0	-813.6
14	268.1	-800.0
15	220.3	-700.0
16	200.0	-644.6
17	184.2	-600.0
18	160.5	-500.0
19	142.2	-400.0
20	127.3	-300.0
21	115.2	-200.0
22	105.9	-100.0
23	99.7	0.00

DRIVER SIDE COORDINATES

FULL SIZE C/K LD PICKUPS

GMC Z88 – C/K 100/200 (03/53/43) – Hood Profiles

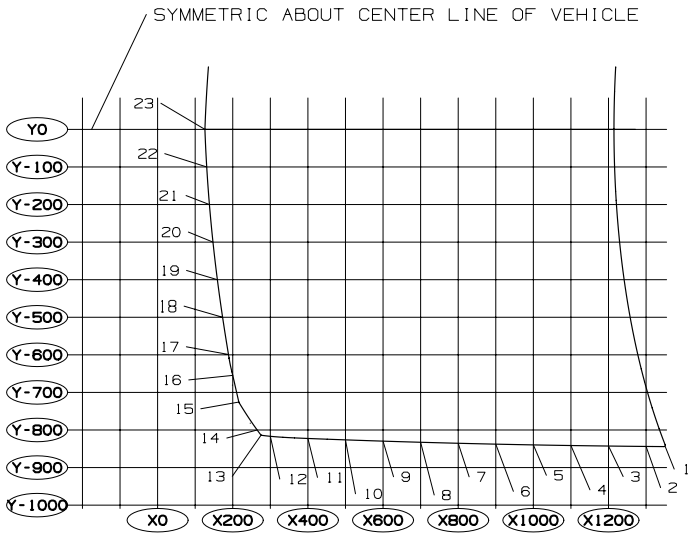

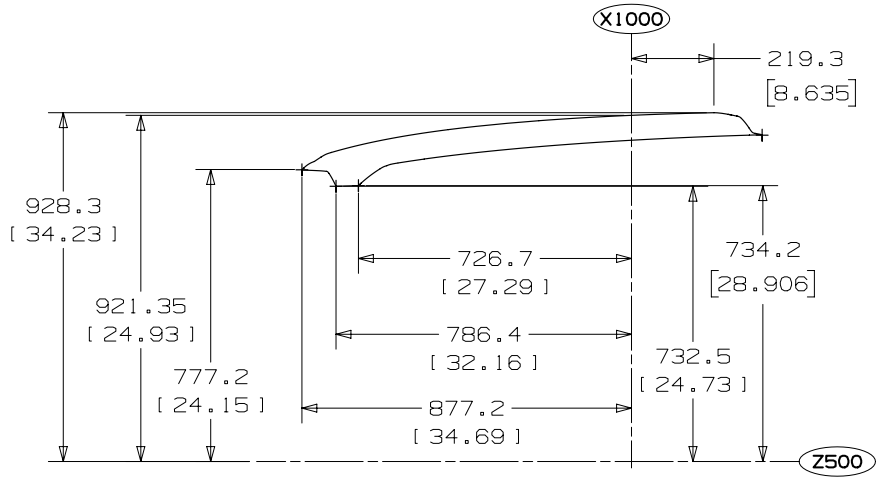

PT. #	LENGTH	WIDTH
1	1351.0	-844.2
2	1300.0	-843.8
3	1200.0	-842.7
4	1100.0	-841.4
5	1000.0	-839.6
6	900.0	-837.6
7	800.0	-835.3
8	700.0	-832.7
9	600.0	-829.7
10	500.0	-826.3
11	400.0	-822.6
12	300.0	-816.8
13	275.5	-813.1
14	264.9	-800.0
15	216.2	-725.6
16	200.0	-654.7
17	188.8	-600.0
18	172.9	-500.0
19	159.1	-400.0
20	147.4	-300.0
21	137.9	-200.0
22	130.7	-100.0
23	125.9	0.00

DRIVER SIDE COORDINATES

FULL SIZE C/K LD PICKUPS

Rear Back of Cab Silhouette – Pickups

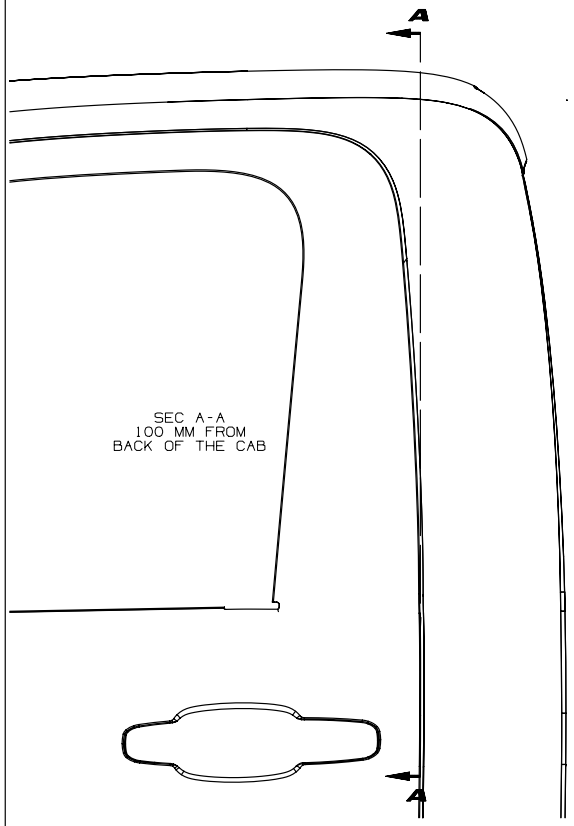

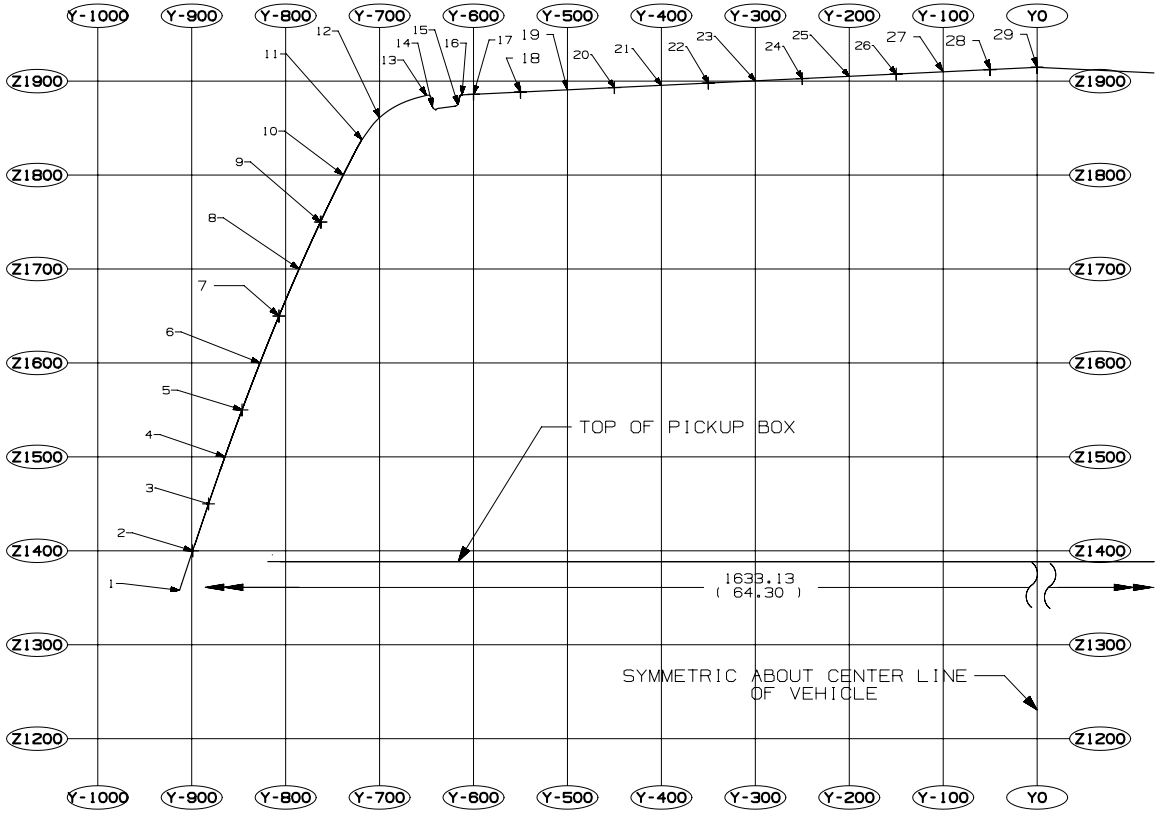

DRIVER SIDE COORDINATES

PT#	WIDTH	HEIGHT
1	-912.95	1357.9
2	-899.00	1400.0
3	-882.09	1450.0
4	-864.64	1500.0
5	-846.44	1550.0
6	-827.29	1600.0
7	-807.09	1650.0
8	-785.11	1700.0
9	-762.99	1750.0
10	-738.72	1800.0
11	-718.73	1837.74
12	-700.00	1861.10
13	-650.11	1884.85
14	-643.62	1872.52
15	-616.62	1861.10
16	-612.29	1885.36
17	-600.00	1885.95
18	-550.00	1888.34
19	-500.00	1890.74
20	-450.00	1893.13
21	-400.00	1895.53
22	-350.00	1897.93
23	-300.00	1900.32
24	-250.00	1902.72
25	-200.00	1905.11
26	-150.00	1907.51
27	-100.00	1909.91
28	-50.00	1912.30
29	0.00	1914.70

C/K10703 02/12/13 [ ]=INCHES ANB56252.5

Regular Cab Pickup – C/K 100/200/300 (03) – Sign Area

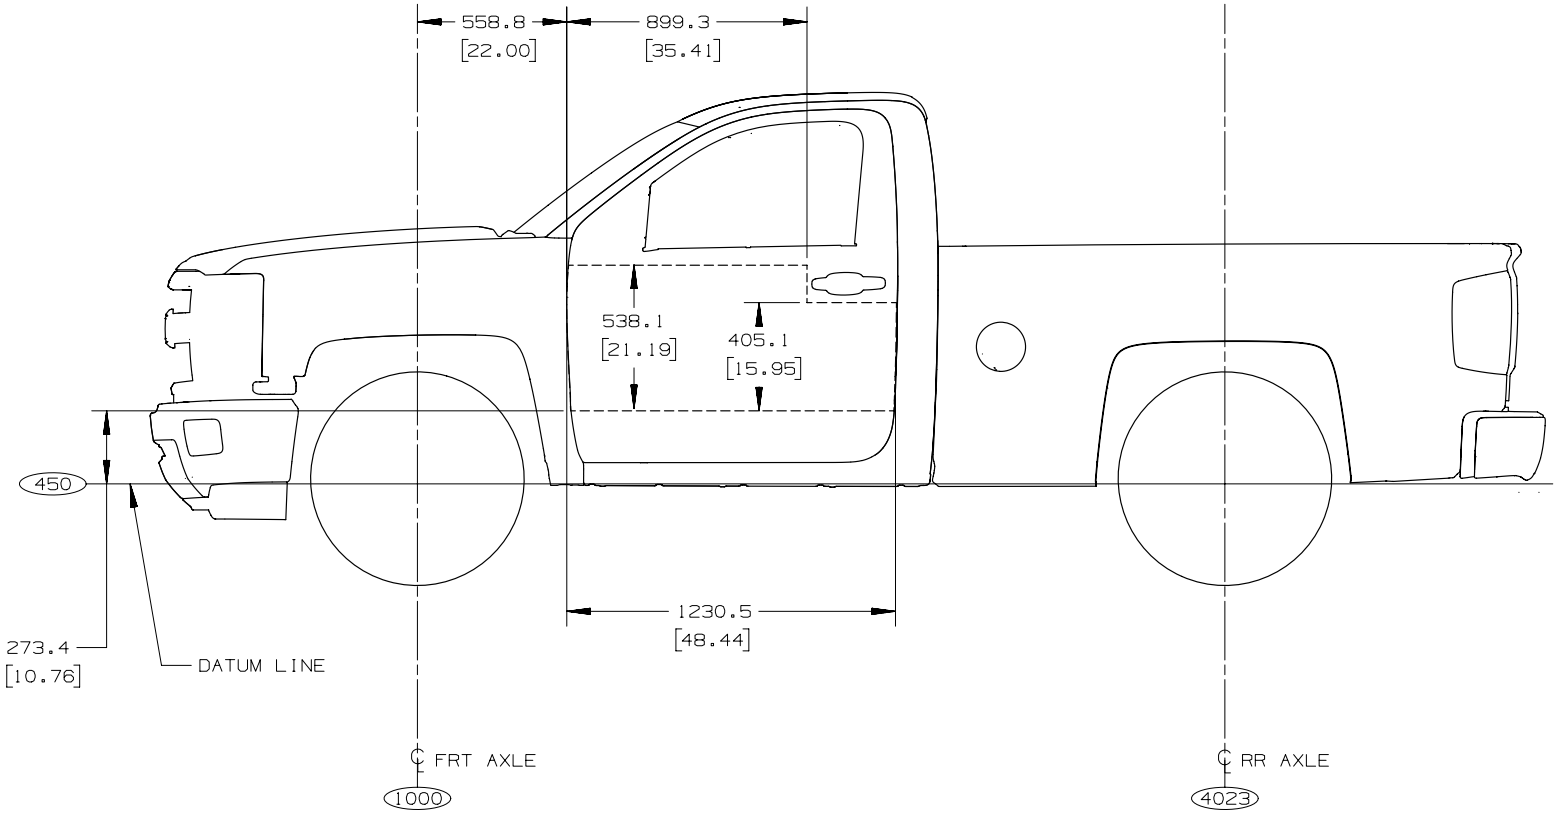

REGULAR CAB SIGN AREA X88 SHOWN

27NOV2012 AW [ ]= INCHES ANC41481.6

FULL SIZE C/K LD PICKUPS

Extended Cab Pickup – C/K 100/200/300 (53) – Sign Area

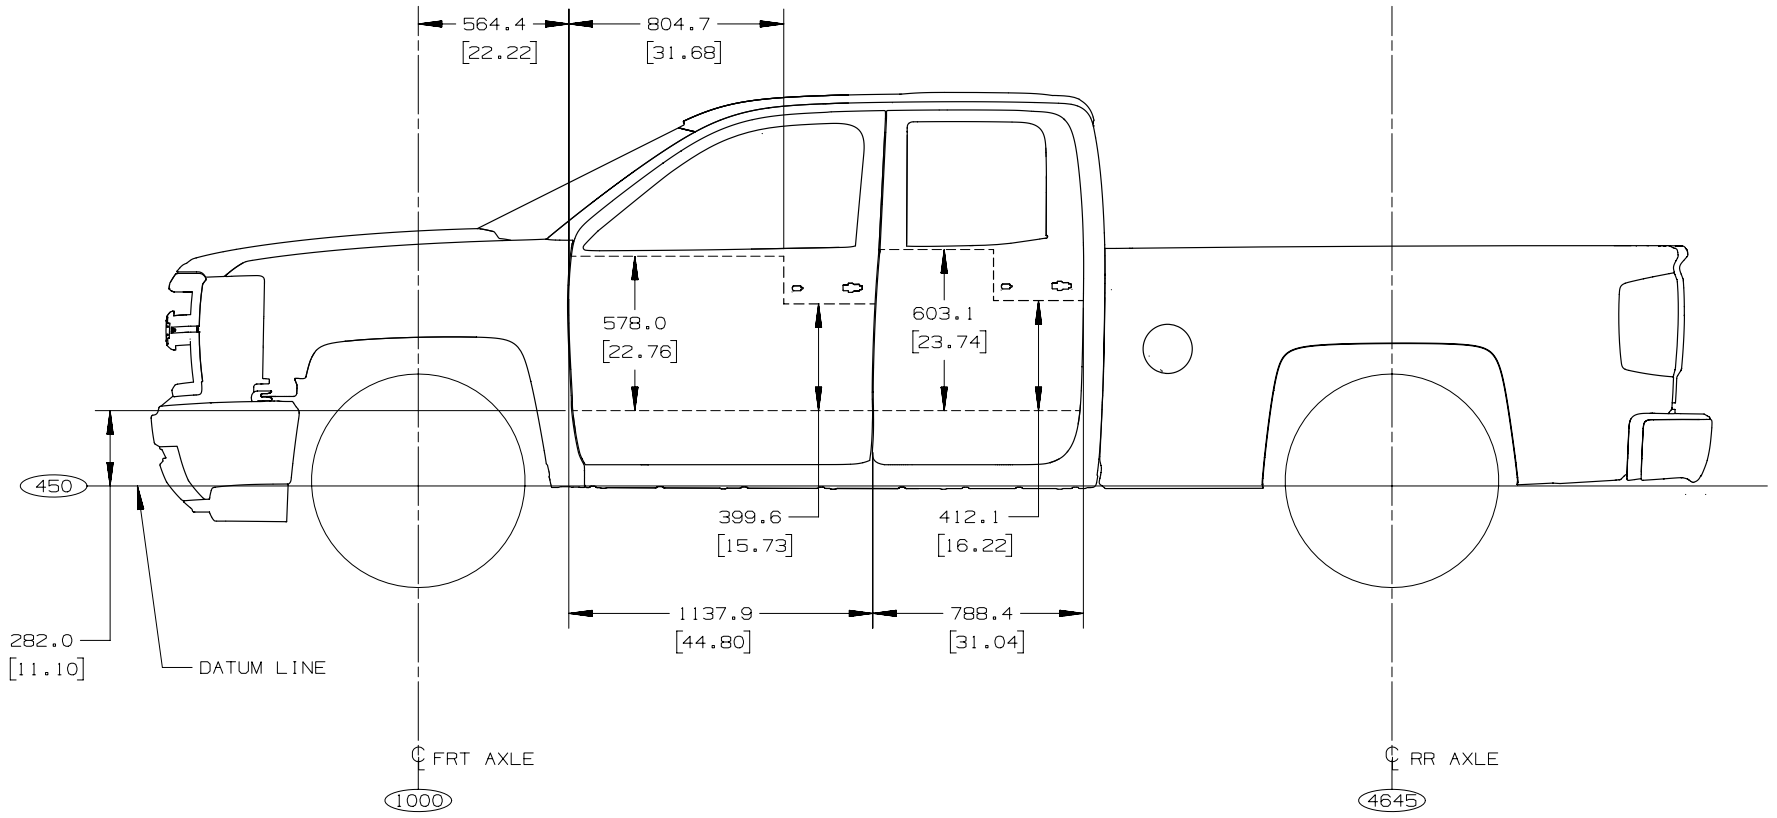

TRUCK EXTENDED CAB SIGN AREA X88 SHOWN 2014

27NOV2012 AW [ ]= INCHES ANC41481.7

FULL SIZE C/K LD PICKUPS

Crew Cab Pickup – C/K 100/200/300 (43) – Sign Area

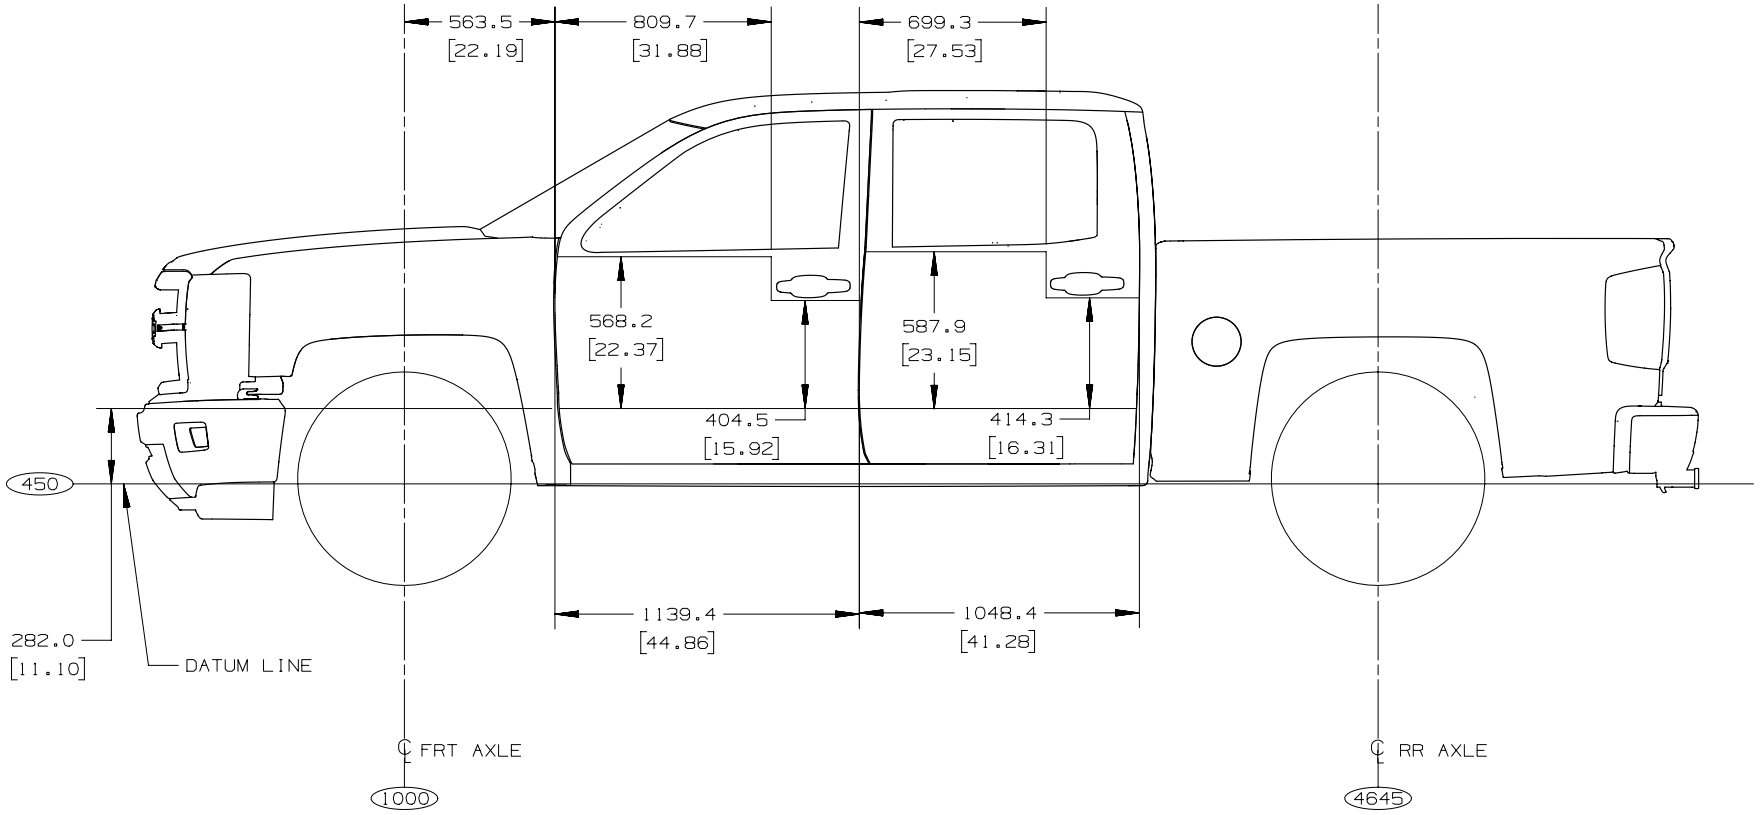

CREW CAB SIGN AREA X88 SHOWN 2014

27NOV2012 AW [ ]= INCHES ANC41481.5

Regular Cab (03) – Cab Step in Heights

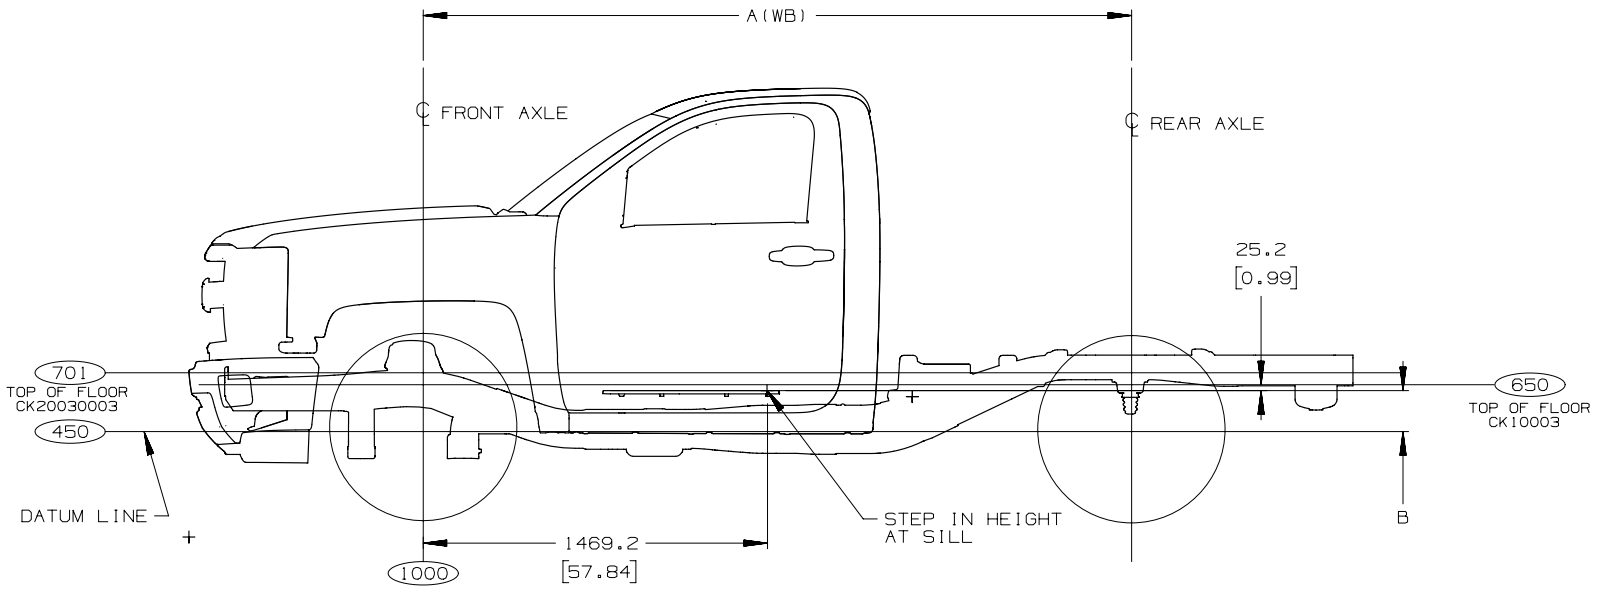

ALL MATH DATA FOR CK100 03,ABOVE THE FRAME ARE MOVED UP 51 MM TO OBTAIN THE DATA FOR CK200300 03 MODELS.

MODEL	A(WB)	B
CK15703	3023.0 [119.0]	174.8 [6.88]
CK15903	3378.0 [133.0]	174.8 [6.88]

STEP IN HEIGHTS FOR CK100200300 03 2014 28NOV2012 AW [ ]=INCHES ANC10189.3

Extended Cab (53) – Cab Step in Heights

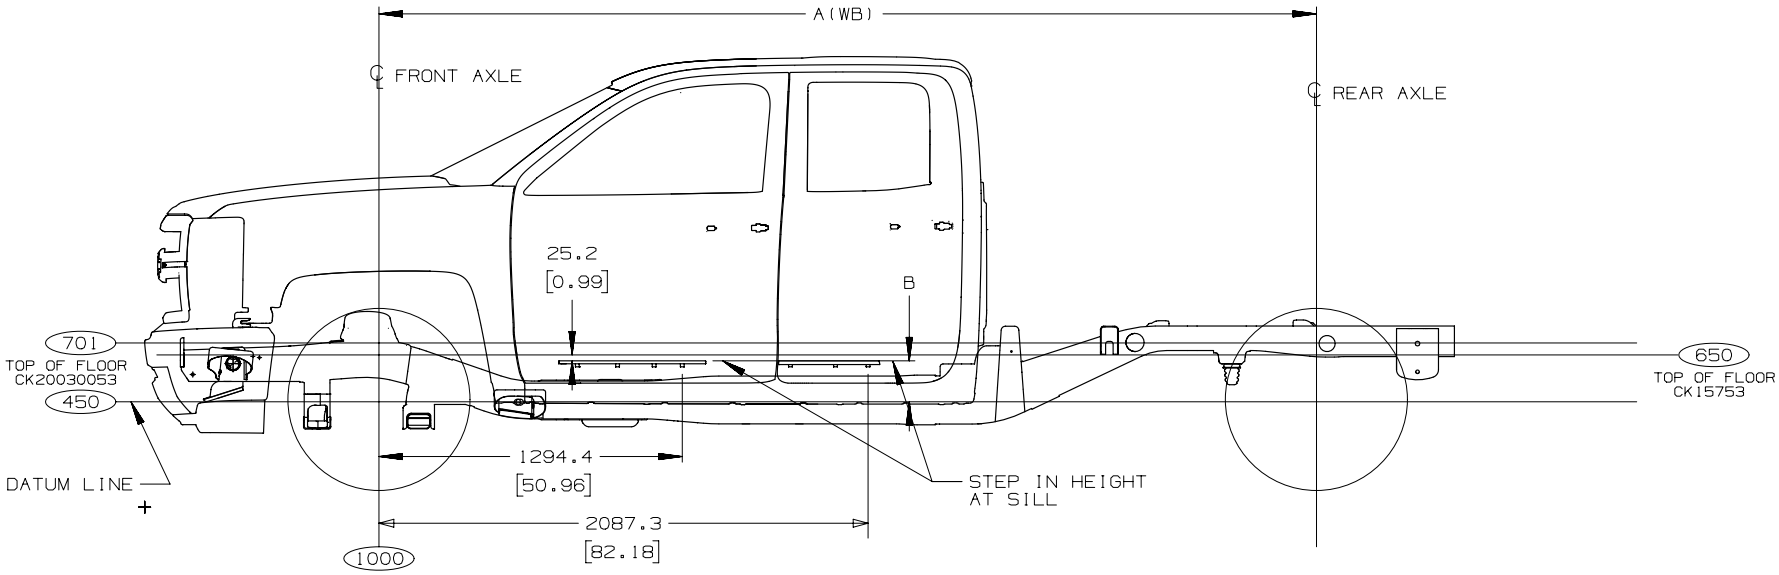

ALL MATH DATA FOR CK15753,ABOVE THE FRAME ARE MOVED UP 51 MM TO OBTAIN THE DATA FOR CK200300 53 MODELS.

MODEL	A(WB)	B
CK15753	4001.0 [157.52]	174.8 [6.88]

STEP IN HEIGHTS FOR CK100200300 53 2014 27NOV2012 AW [ ]=INCHES ANC10189.4

FULL SIZE C/K LD PICKUPS

Crew Cab (43) – Cab Step in Heights

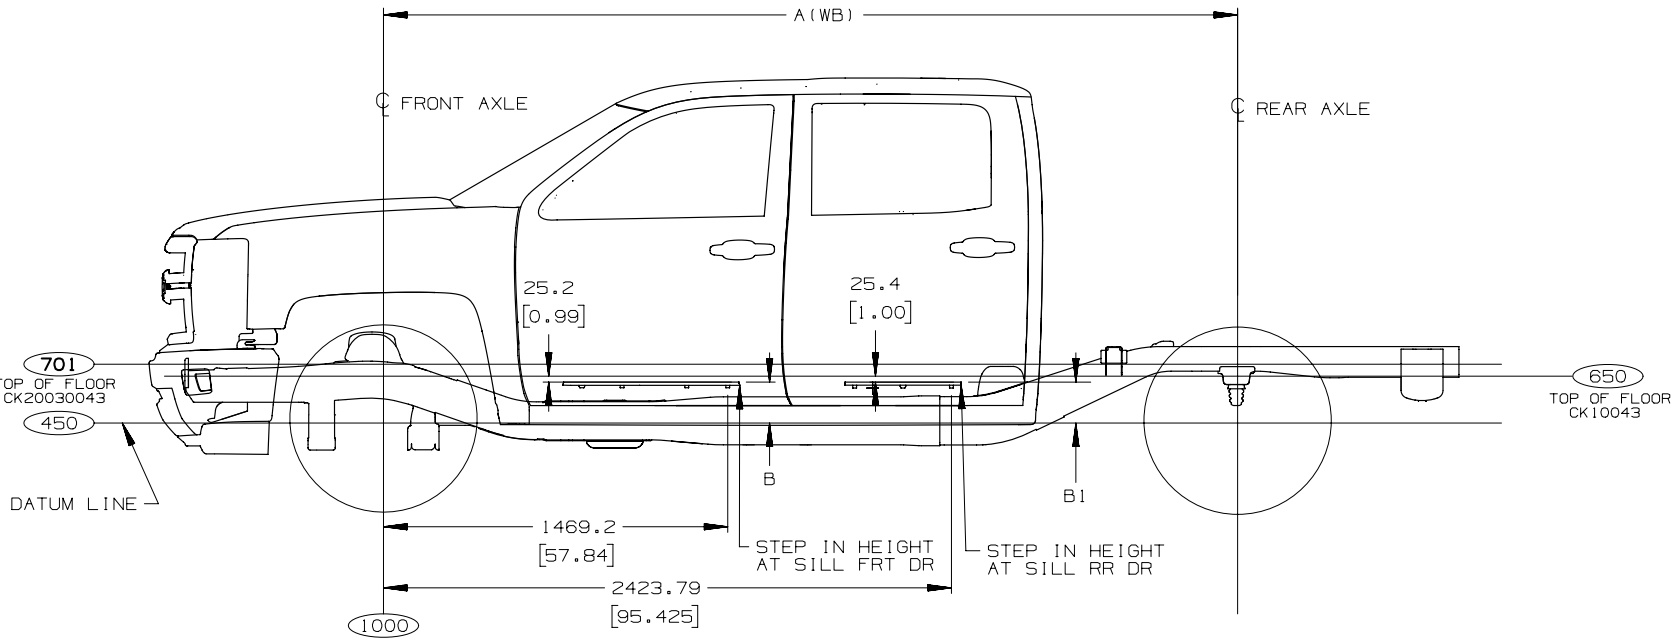

ALL MATH DATA FOR CK100 43,ABOVE THE FRAME ARE MOVED UP 51 MM TO OBTAIN THE DATA FOR CK200300 43 MODELS.

MODEL	A (WB)	B	B1
CK15543	3645.0 [143.5]	174.8 [6.88]	174.6 [6.88]
CK15743	3886.0 [153.0]	225.8 [8.90]	225.6 [8.90]

STEP IN HEIGHTS FOR CK100200300 43 2014 28NOV2012 AW [ ]=INCHES ANC10189.5

FULL SIZE C/K LD PICKUPS

C/K 1000, Option DL8 and C/K 2000, Option DE2 – Mirrors, Outside Rearview

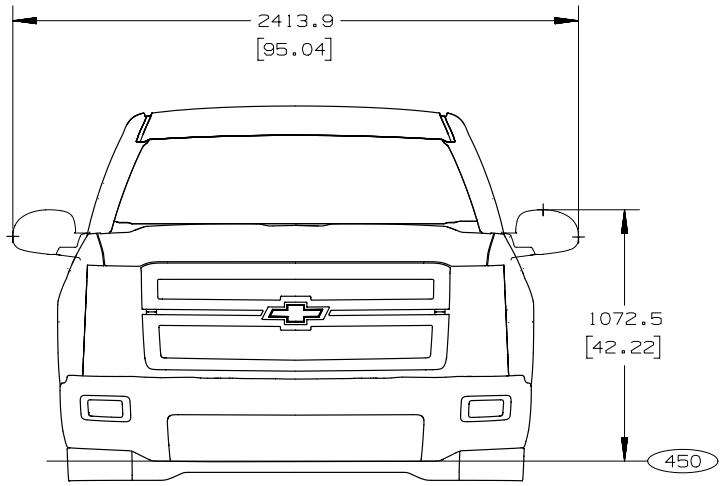

*CL8 CHEVY TRUCK 1500 SERIES

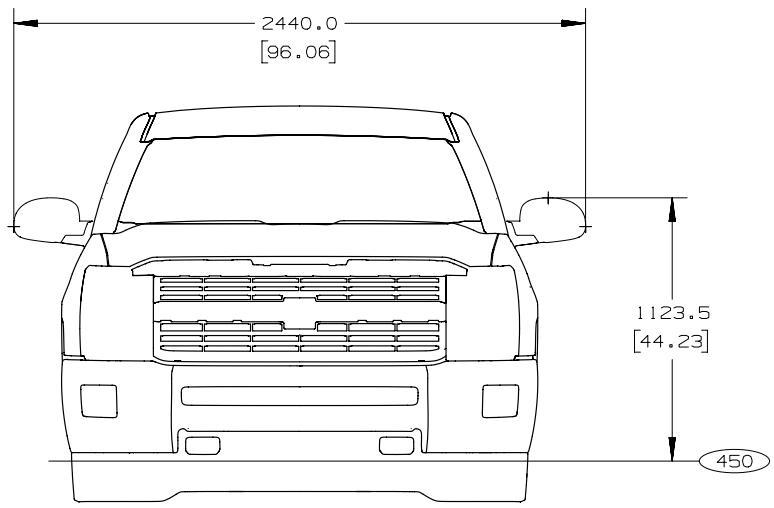

*CL8 GMC TRUCK 1500 SERIES

ALL DIMENSIONS SHOWN FOR CHEVY
BASE MODEL UNLESS OTHERWISE NOTED

1000 2000 3000 SERIES TRUCK 28NOV2012 AW ( ) = INCHES ANC22057.5

FULL SIZE C/K LD PICKUPS

Cab Clearance Lamps, CHMSL and Rear Cab Window – Fixed and Sliding

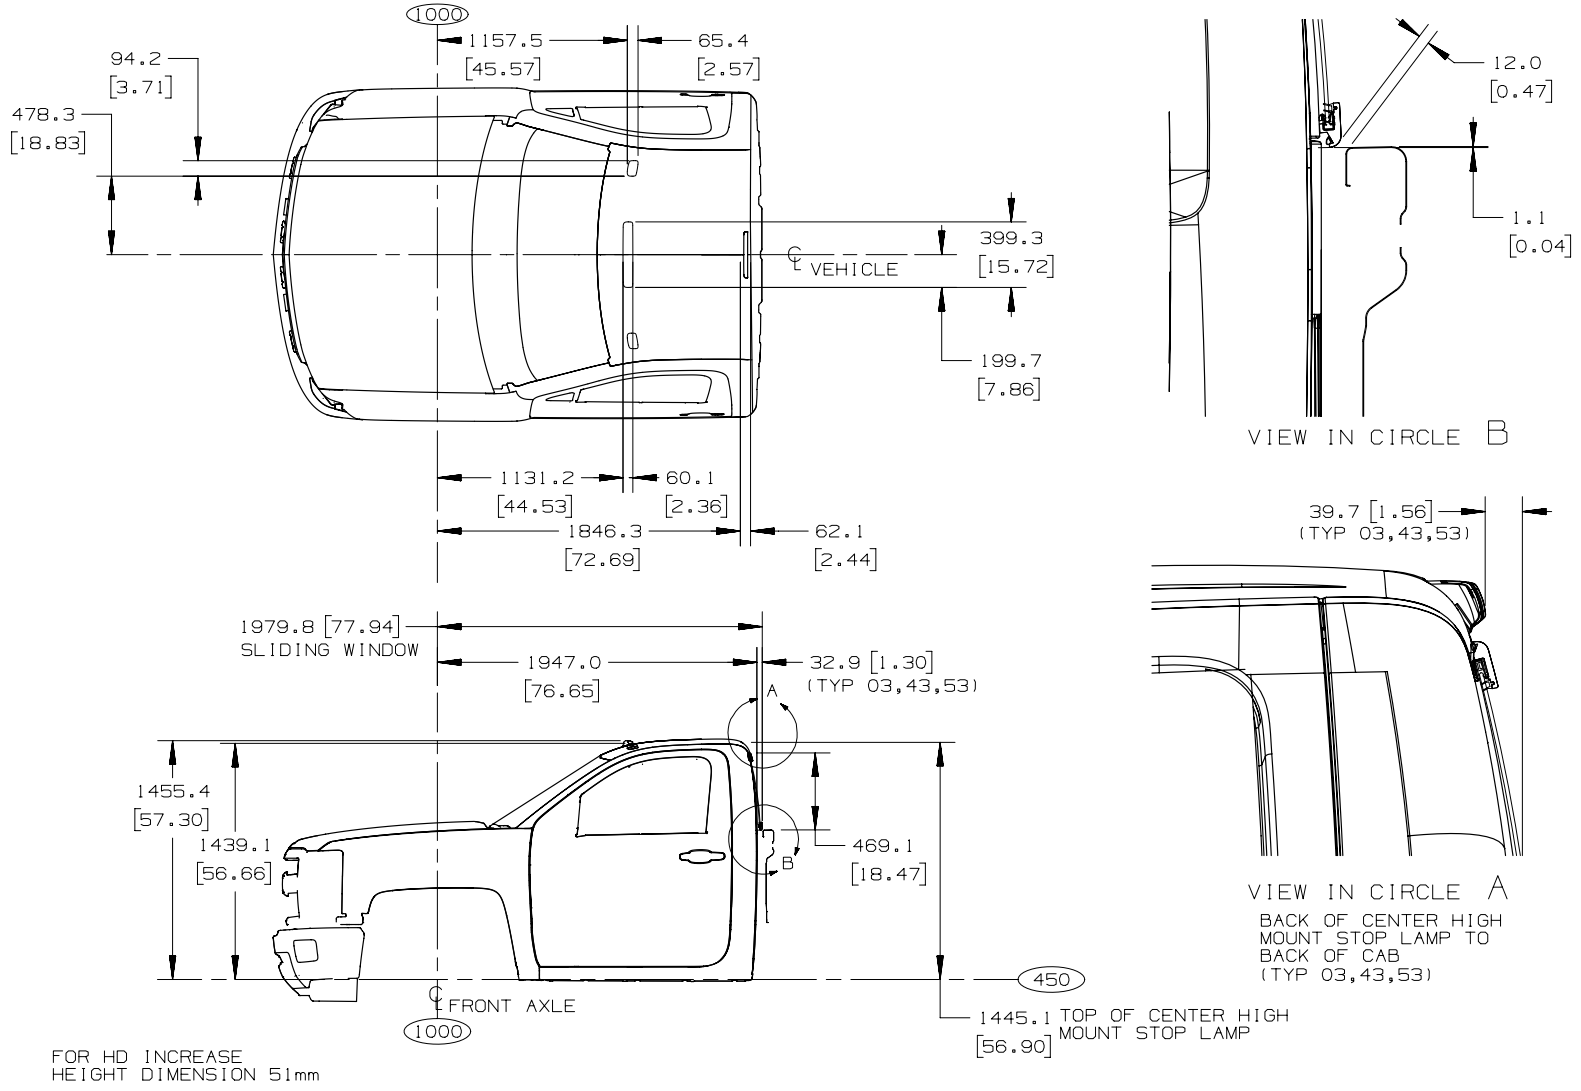

1000/2000/3000/ SERIES CHEVY CK 28NOV2012 AW [ ] = INCHES ANC26550.3

Rear Quarter Body Panel – Cab Pressure Valve Assembly

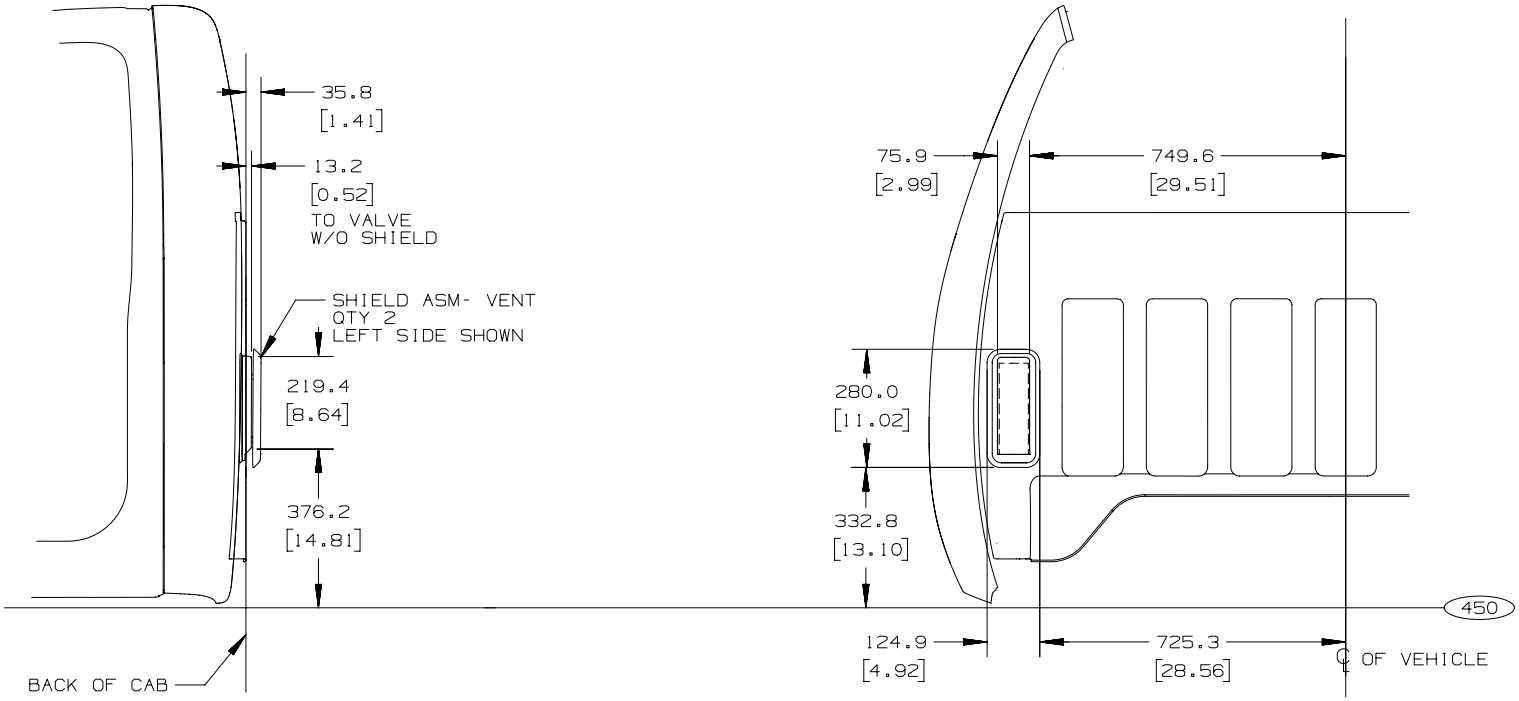

CK 100 03 SHOWN

CK 100200300 034353 28NOV2012 AW [ ]= INCHES ANC27961.3

GMT900 Pickup Box Side Rail Load Points/Paths

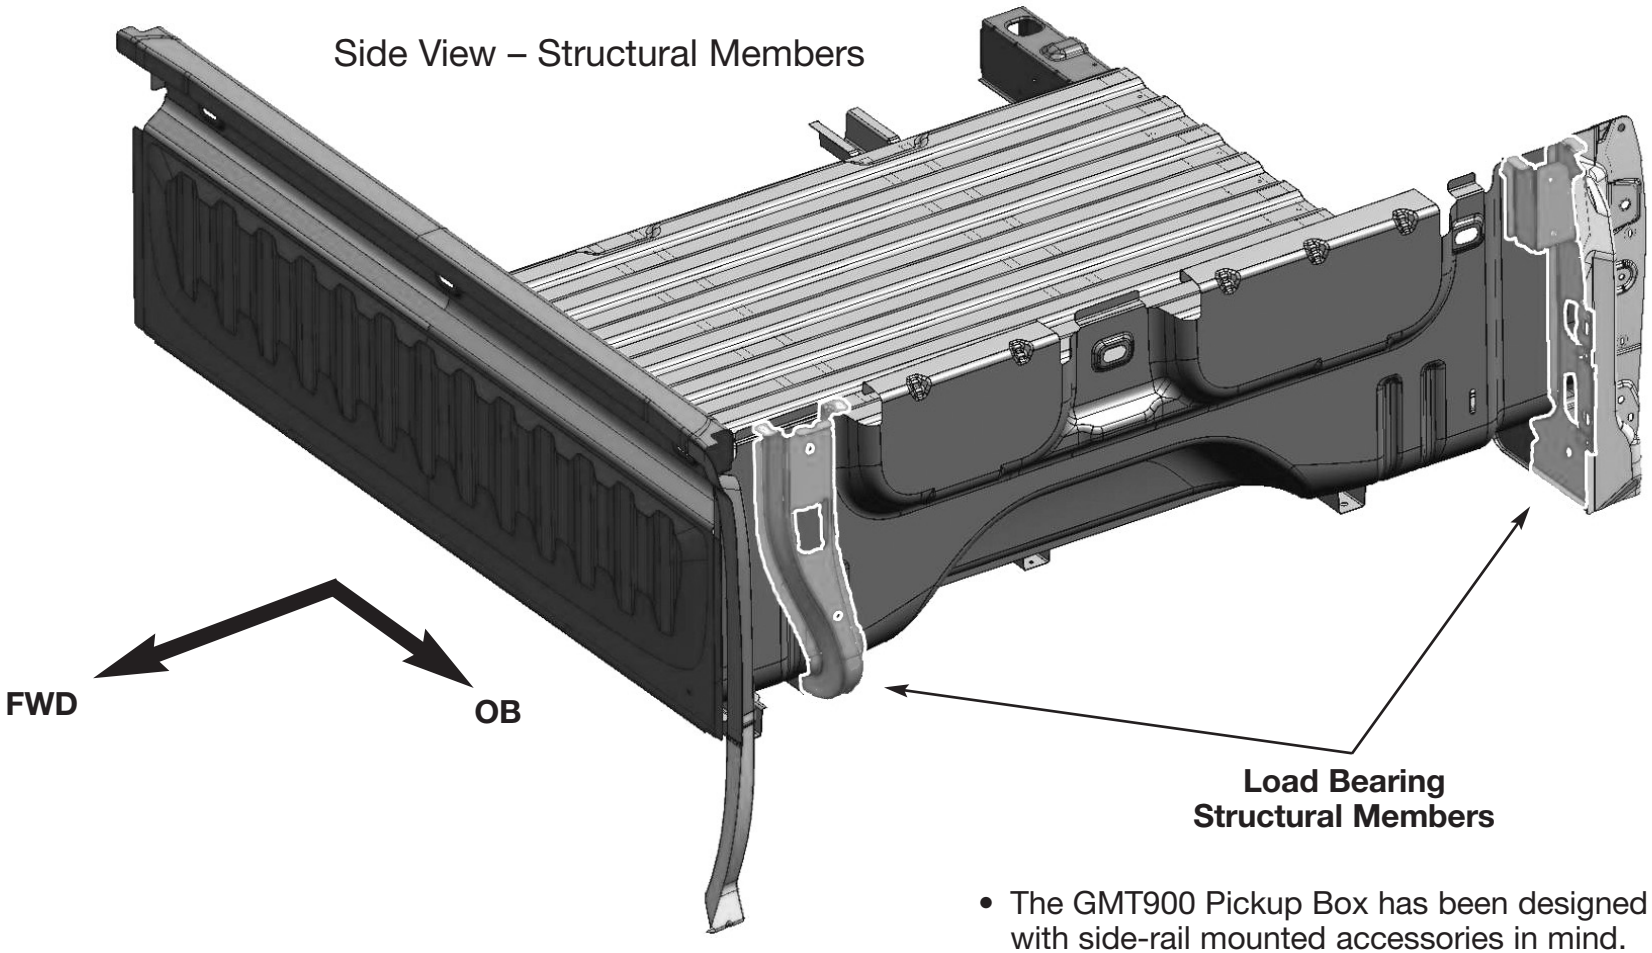

- The GMT900 Pickup Box has been designed with side-rail mounted accessories in mind.
- Specific structural members have been added to provide load paths directly to the platform cross-sills and into the vehicle frame.
- Aftermarket accessories should take advantage of these intended load paths.

GMT900 Pickup Box Side Rail Load Points/Paths

Top View – Structural Members

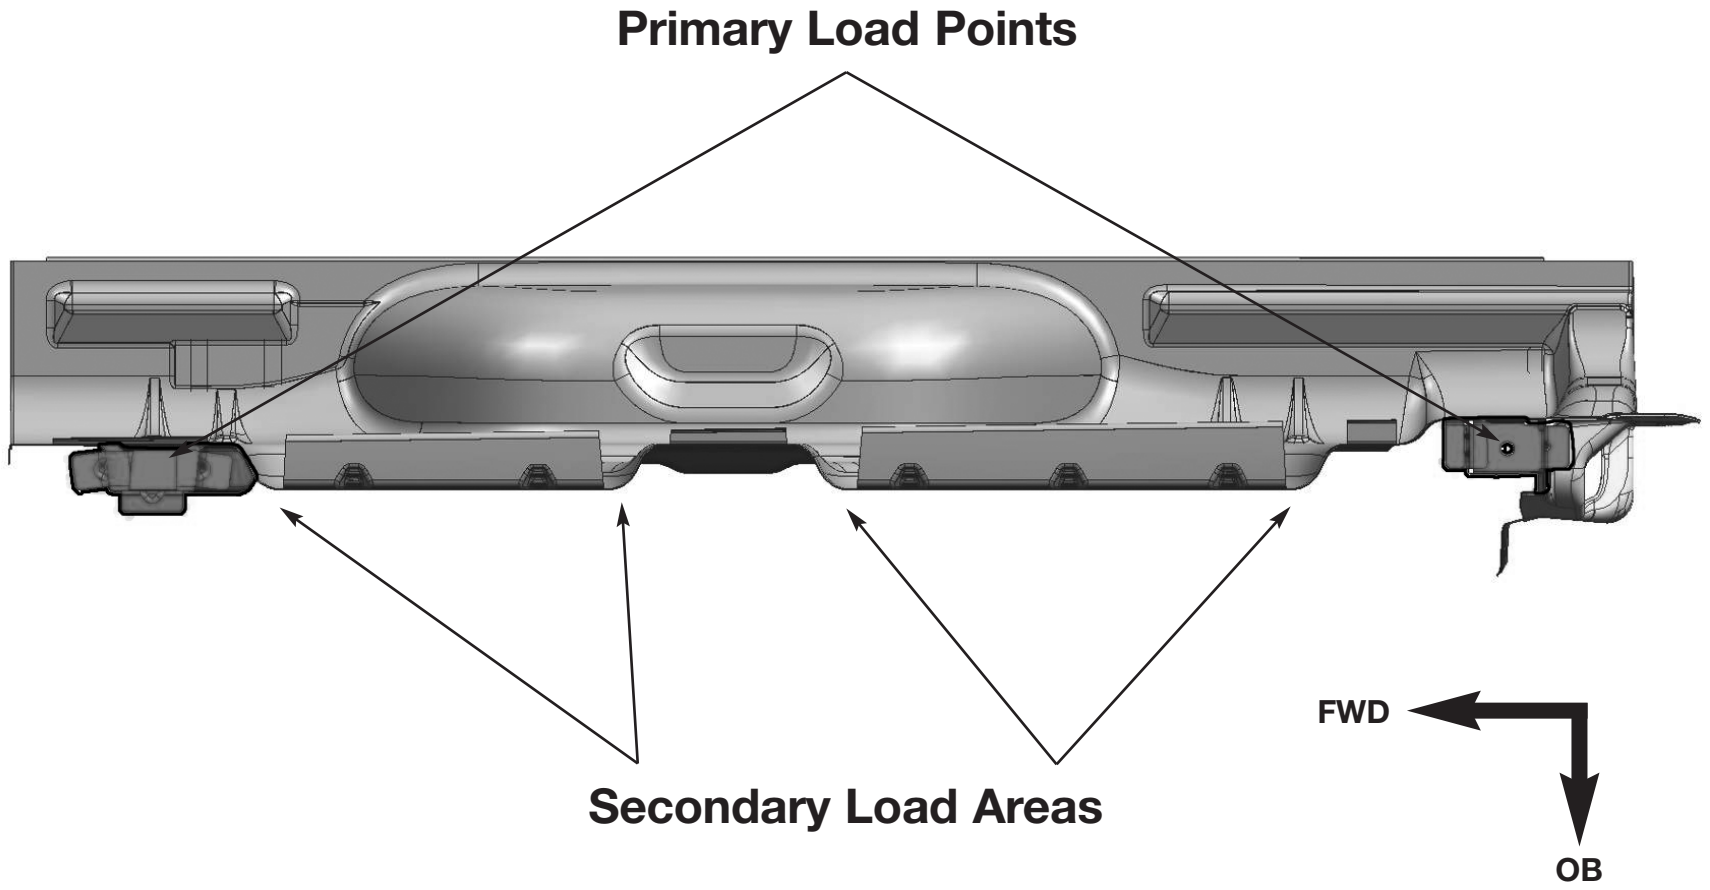

GMT900 Pickup Box Side Rail Load Points/Paths

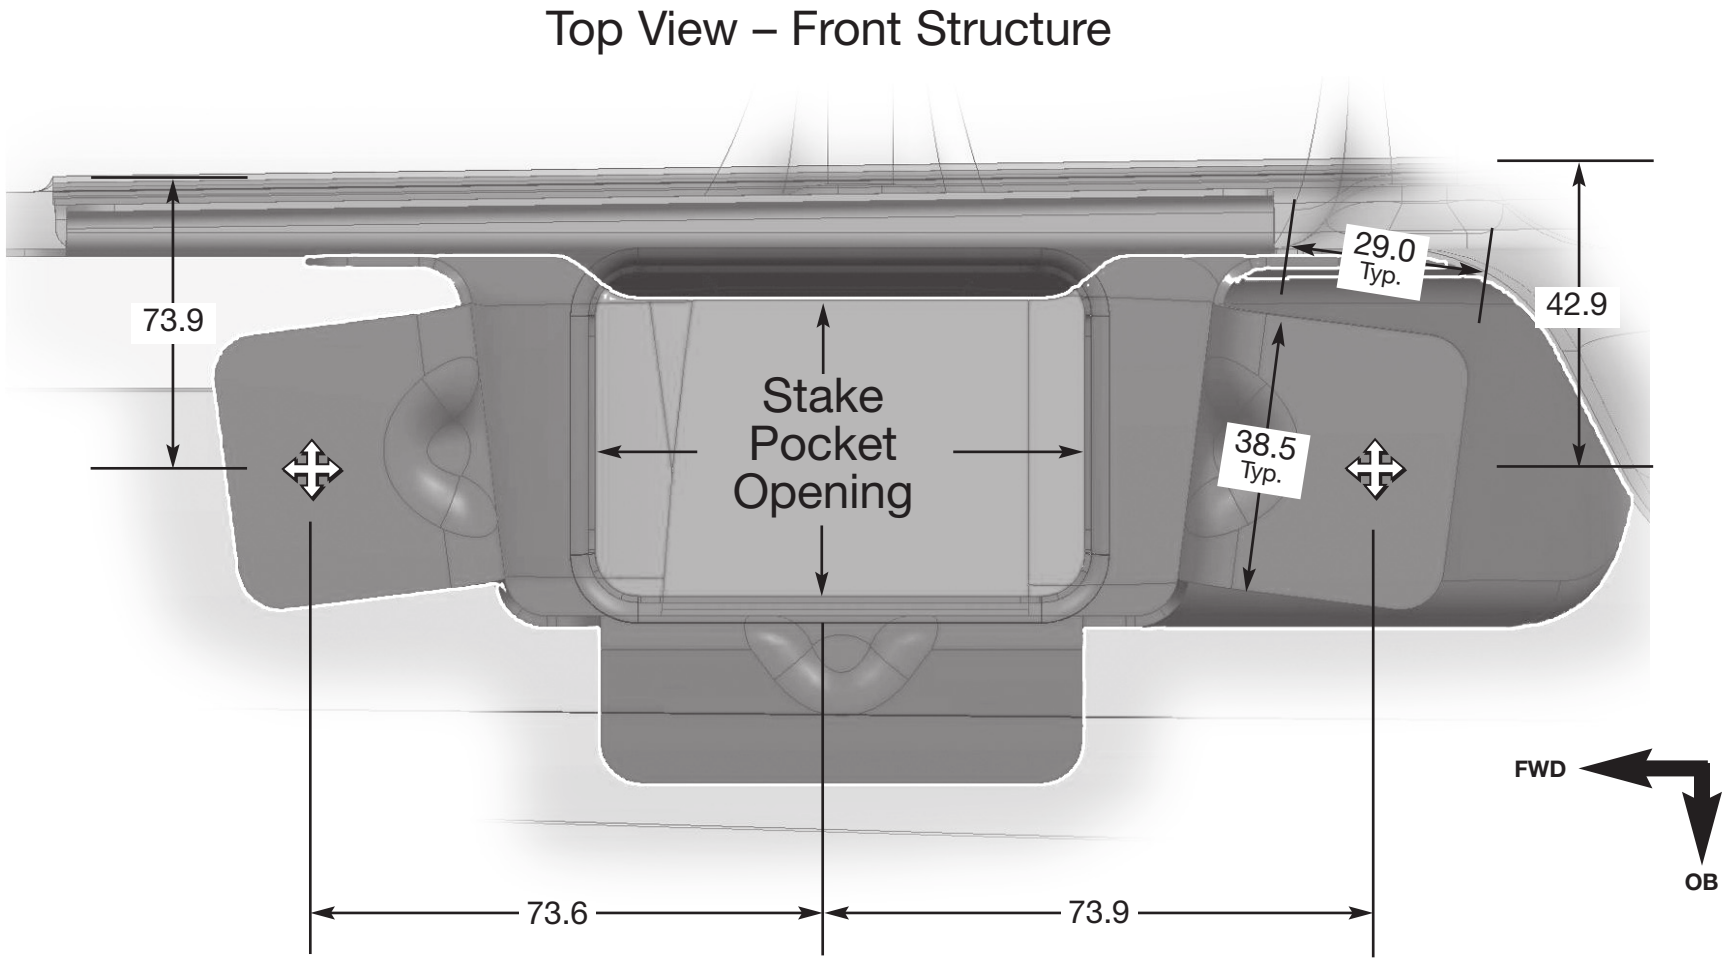

GMT900 Pickup Box Side Rail Load Points/Paths

Top View – Rear Structure

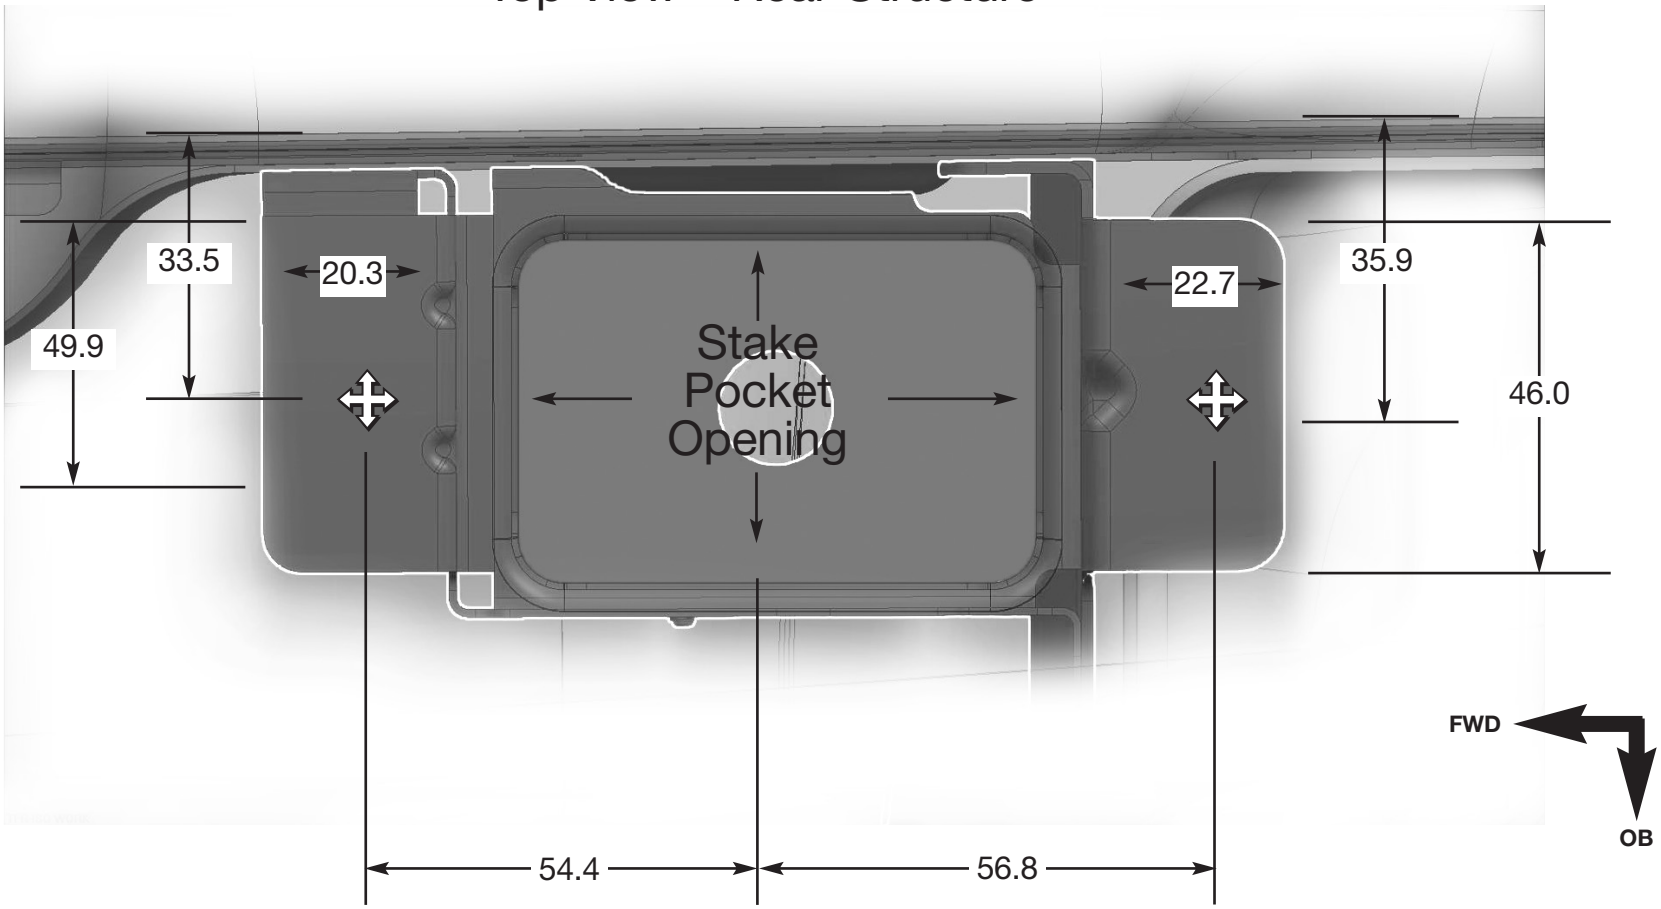

FULL SIZE C/K LD PICKUPS

Length and Width Dimension for 5' 8", 6' 6" and 8' – Pickup Box

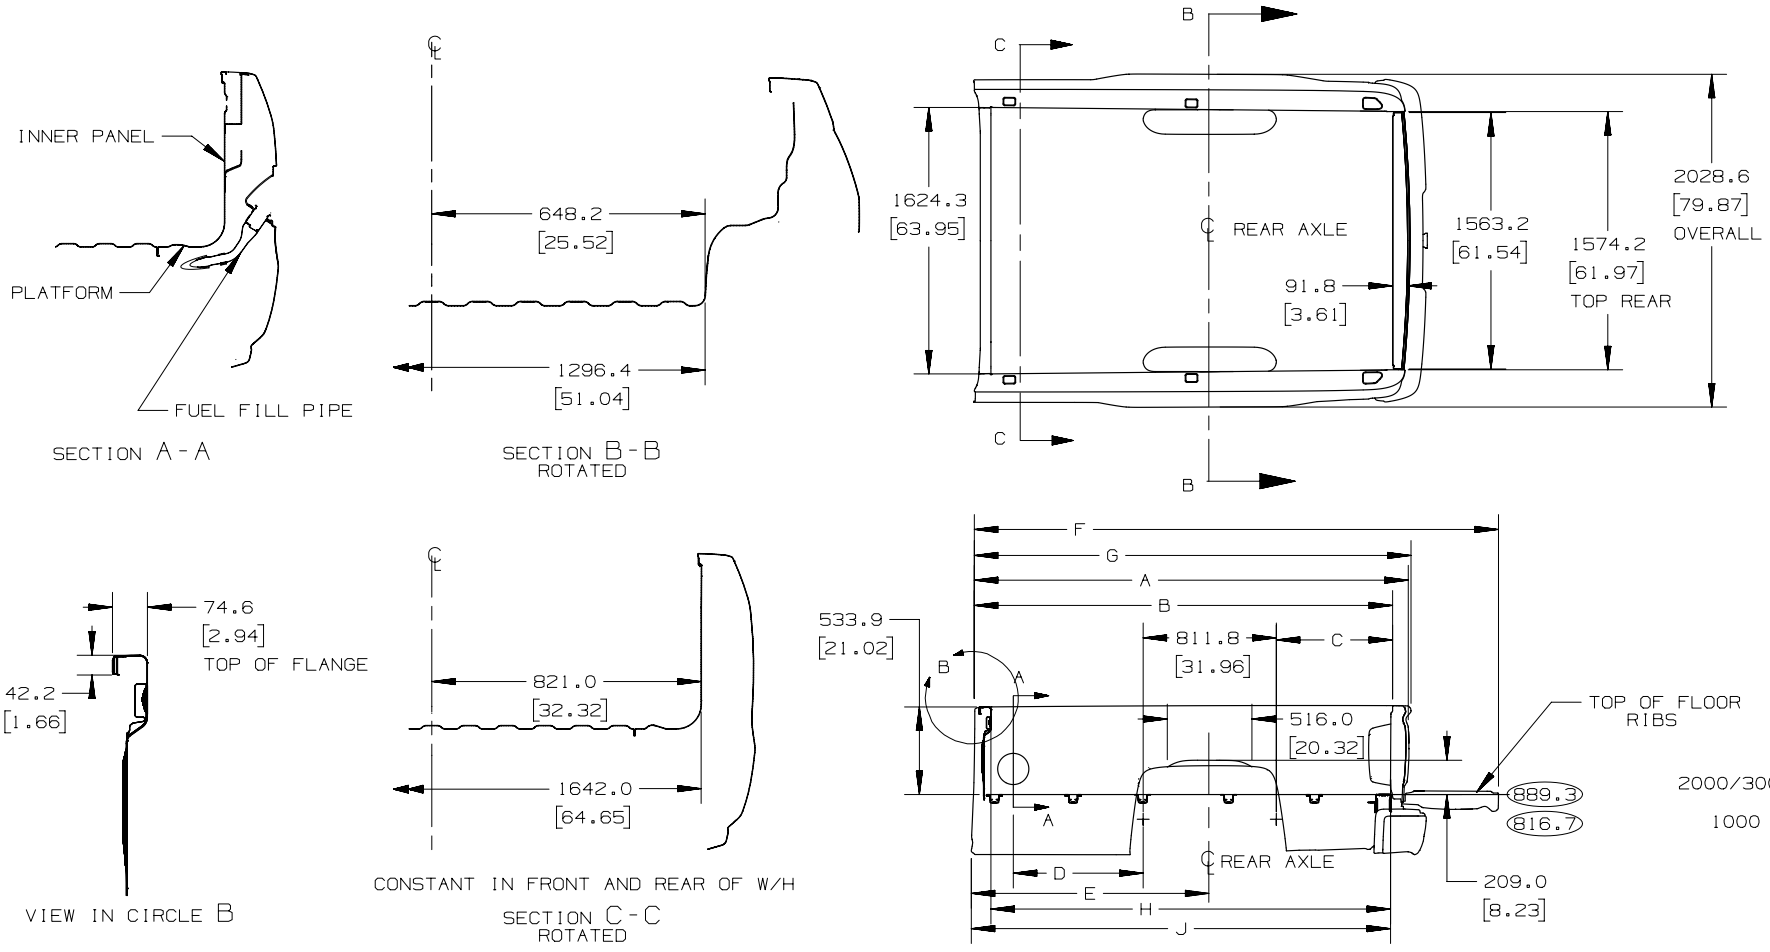

	A	B	C	D	E	F	G	H	J
C/K 5.8 FT	1894.6 [74.59]	1817.0 [71.53]	574.0 [22.60]	203.4 [8.01]	849.2 [33.43]	2436.4 [95.92]	1906.0 [75.04]	1725.0 [67.91]	1844.5 [72.62]
C/K 6.6 FT	2144.6 [84.43]	2059.1 [81.07]	577.3 [22.73]	439.8 [17.32]	1091.5 [42.97]	2601.9 [102.44]	2181.9 [85.90]	1956.2 [77.01]	2078.4 [81.83]
C/K 8.0 FT	2627.7 [103.45]	2536.6 [99.87]	698.4 [27.50]	791.6 [31.17]	1448.0 [57.01]	3192.7 [125.70]	2659.3 [104.70]	2436.5 [95.92]	2555.7 [100.62]

C/K 5'8", 6'6", AND 8'0" PICKUP BOX 20DEC2012 AW [ ]= INC ANB70929.17

FULL SIZE C/K LD PICKUPS

Inside Panel, 5' 8" Box – Pickup Box

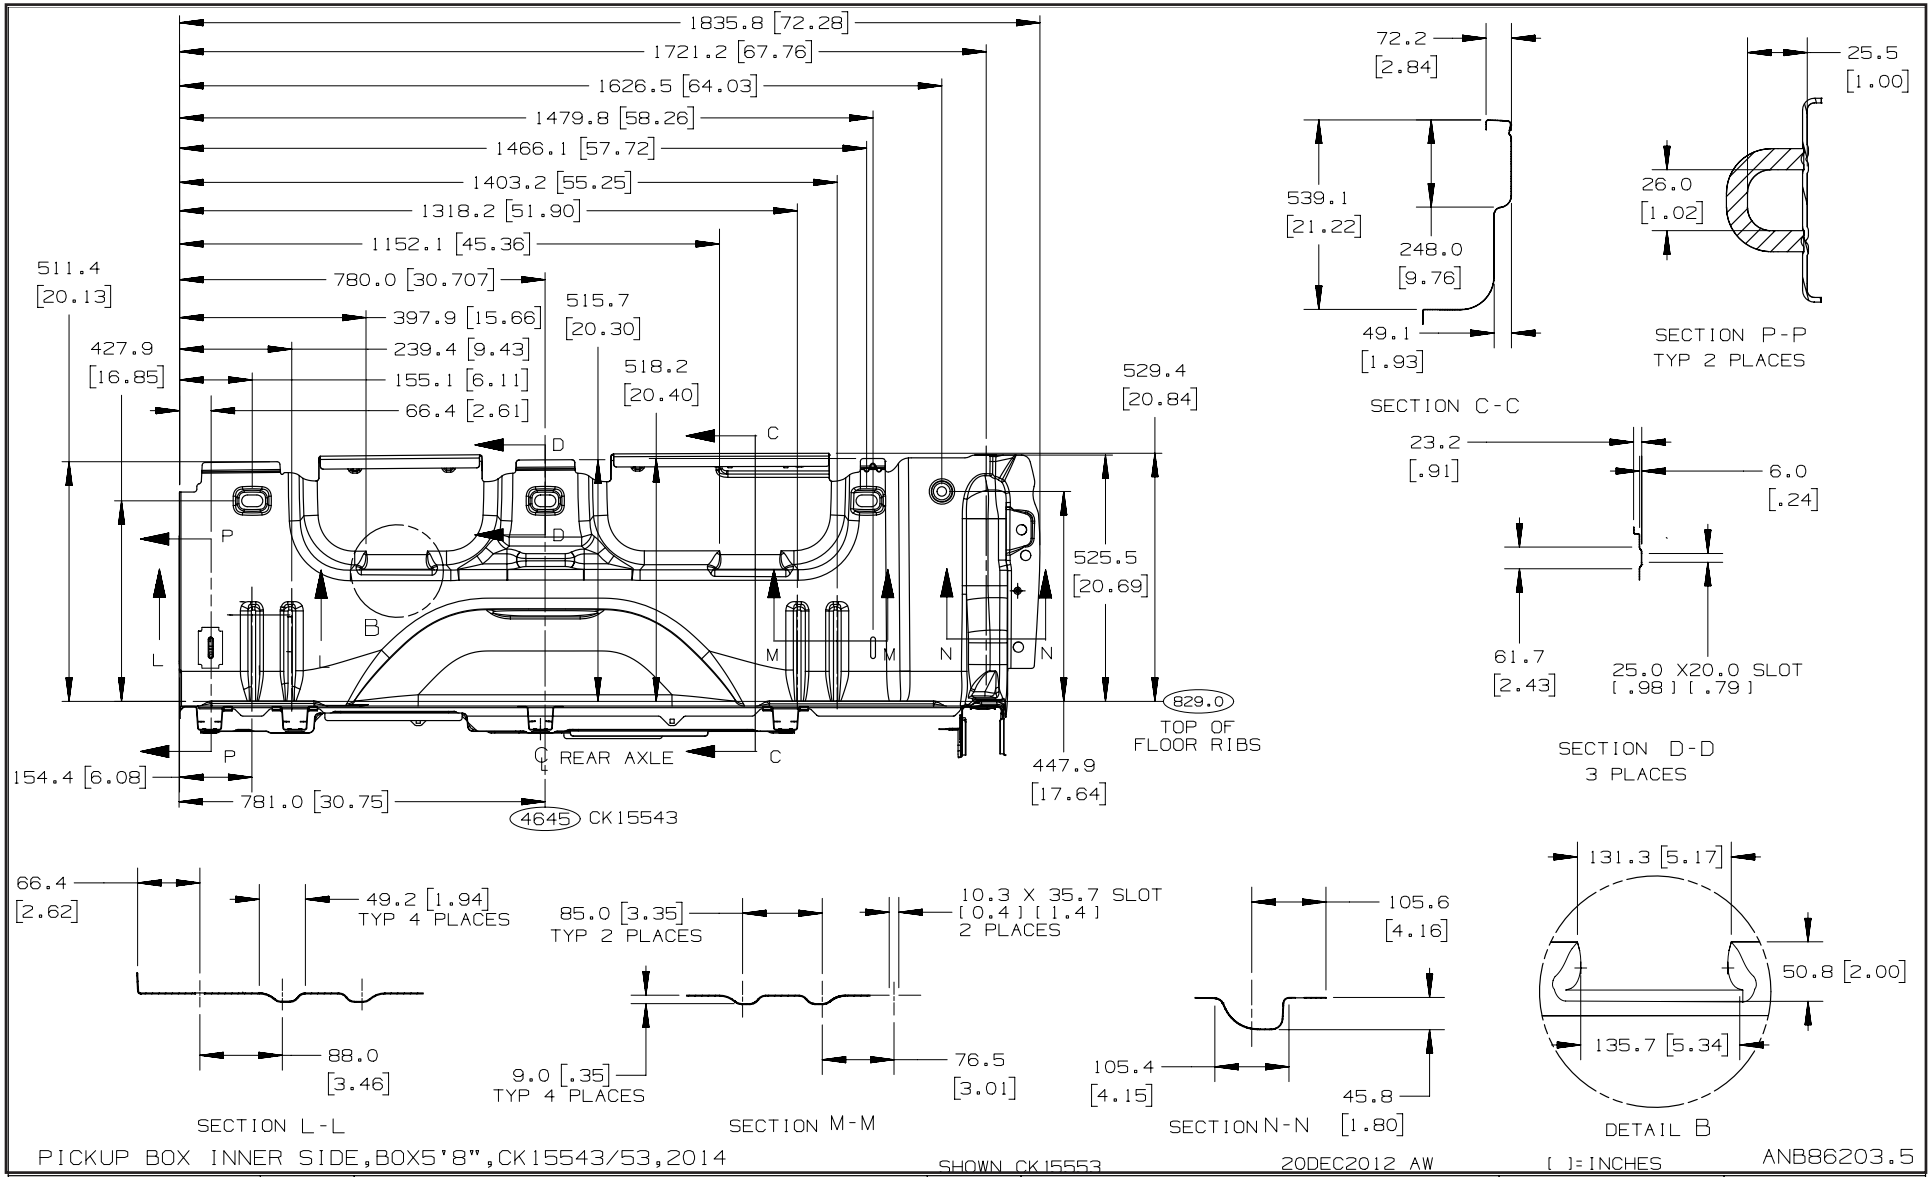

FULL SIZE C/K LD PICKUPS

Cross Sills Location, 5' 8" Box – Pickup Box

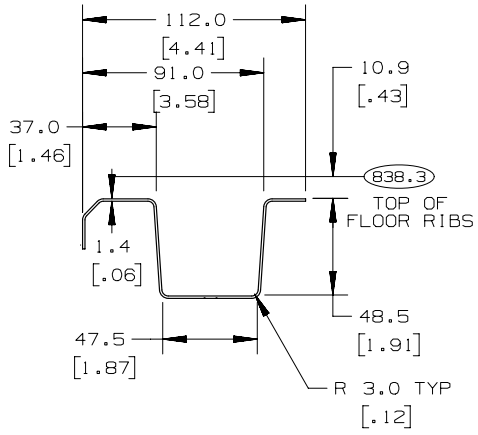

SECTION E-E

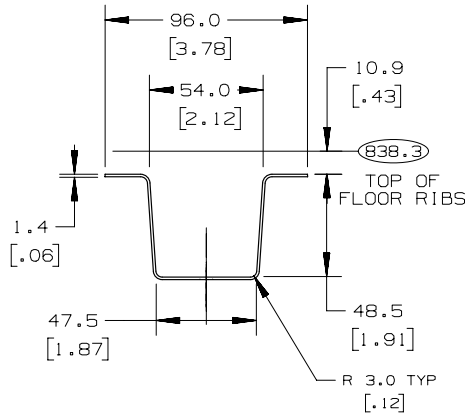

SECTION F-F
3 PLACES

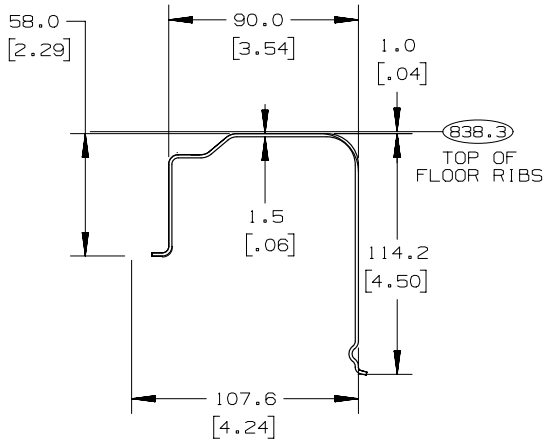

SECTION G-G

MODEL	A(WB)
CK15543	3402.0 [133.9]

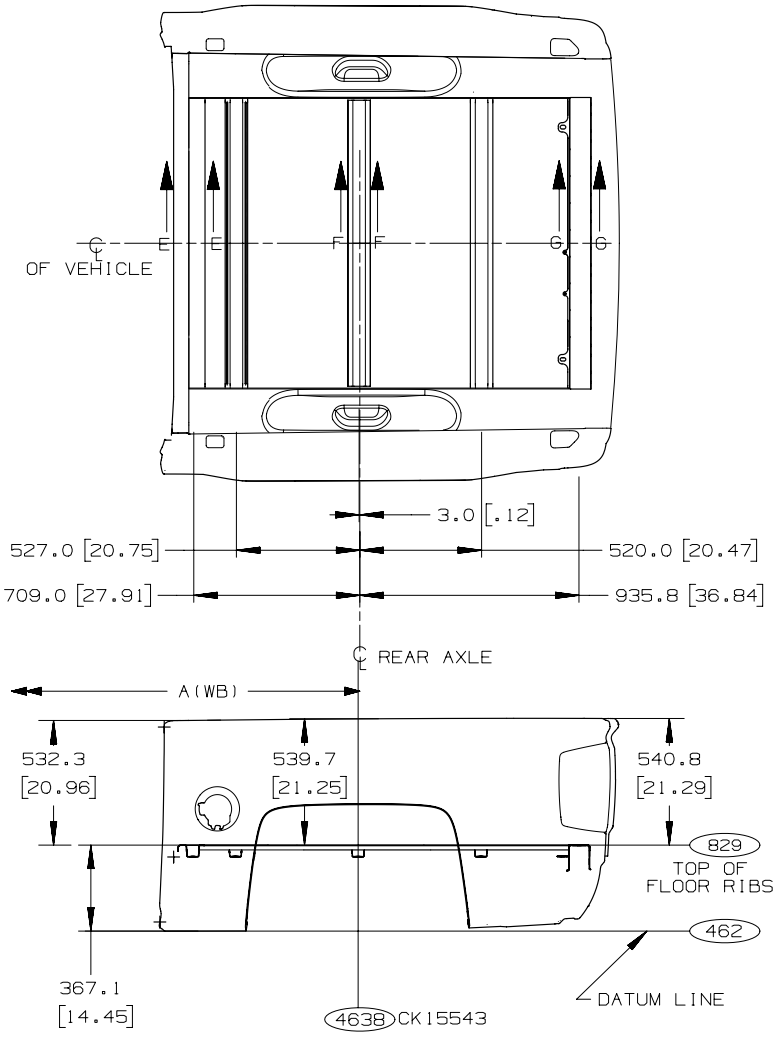

BOX5'8",CK15543 2013/14 SHOWN CK15543 14DEC2012 FM [ ]=INCHES ANB86203.6

FULL SIZE C/K LD PICKUPS

Inside Panel, 6' 6" Box – Pickup Box

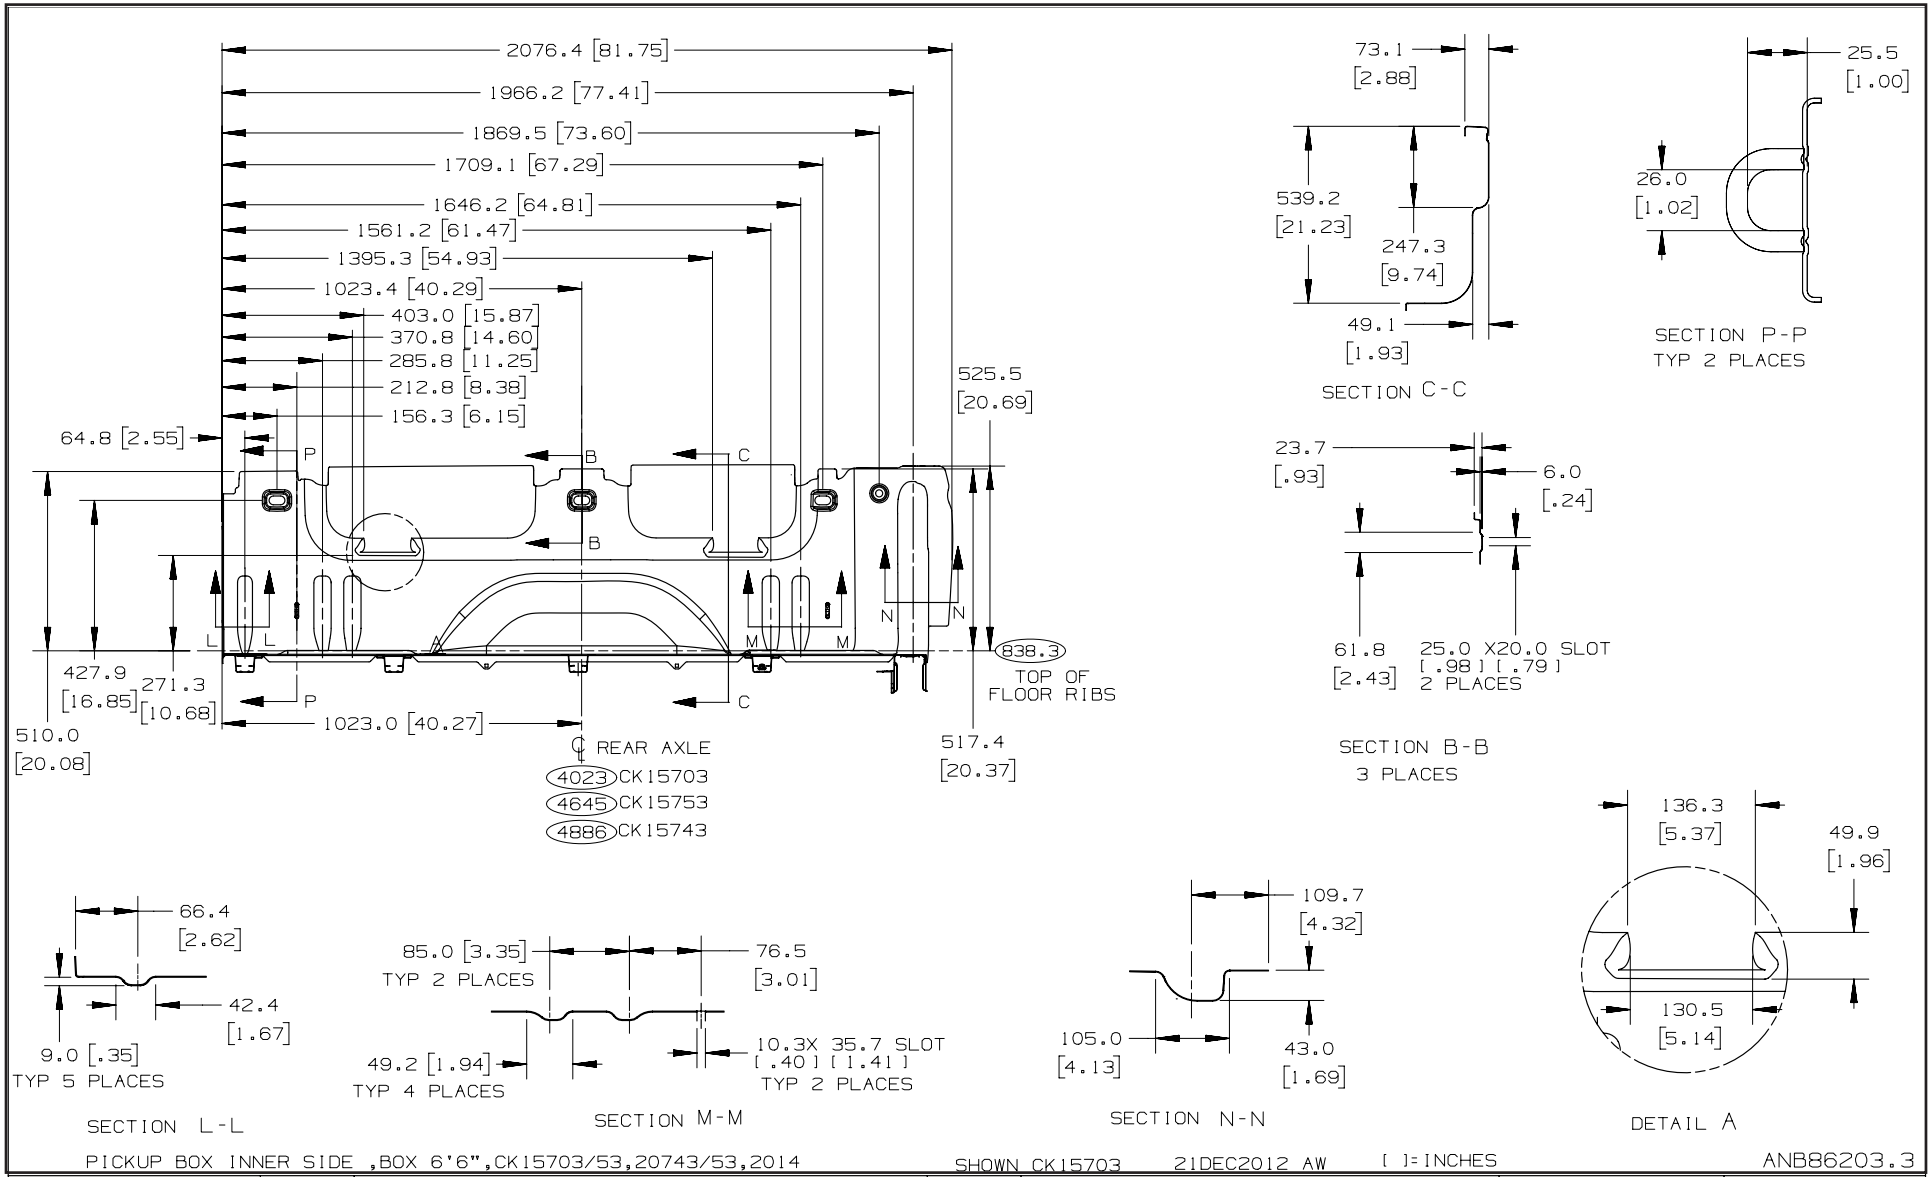

FULL SIZE C/K LD PICKUPS

Cross Sills Location, 6' 6" Box – Pickup Box

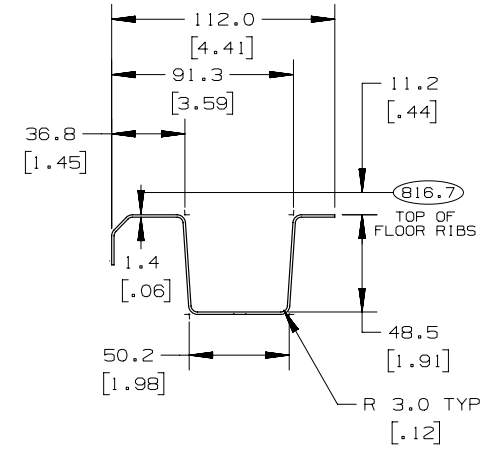

SECTION E-E

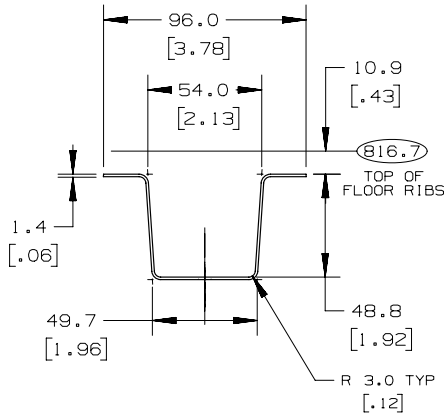

SECTION F-F
TYP 3 PLACES

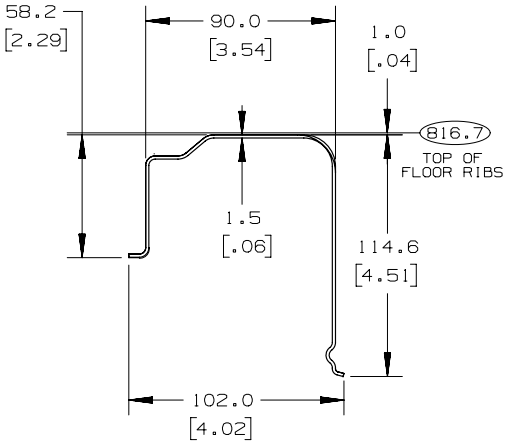

SECTION G-G

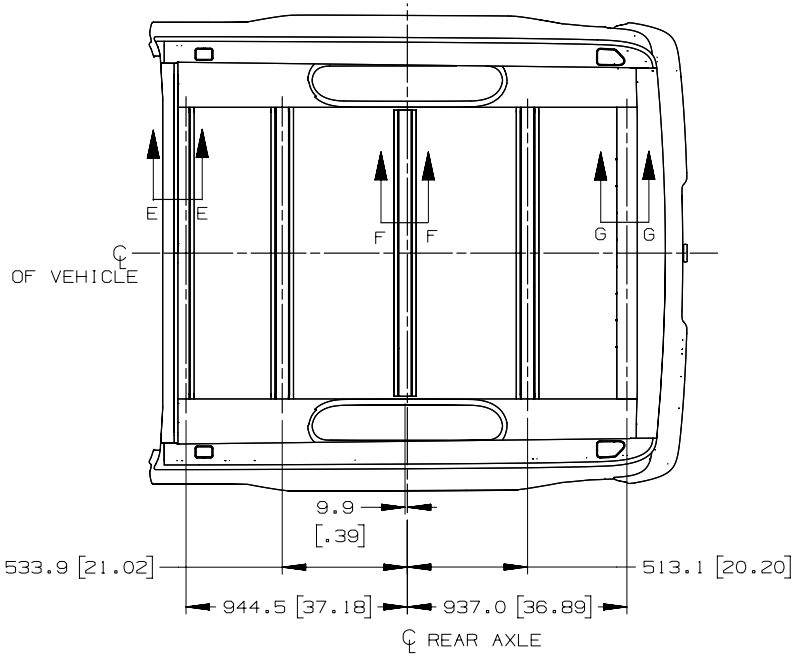

MODEL	A(WB)	TOP OF FLOOR RIBS	B
CK15703	3023.0 [119.0]	816.7 [32.2]	366.7 [14.44]
CK15753	3645.0 [143.5]	816.7 [32.2]	366.7 [14.44]
CK15743	3886.0 [153.0]	889.3 [35.0]	439.3 [17.30]

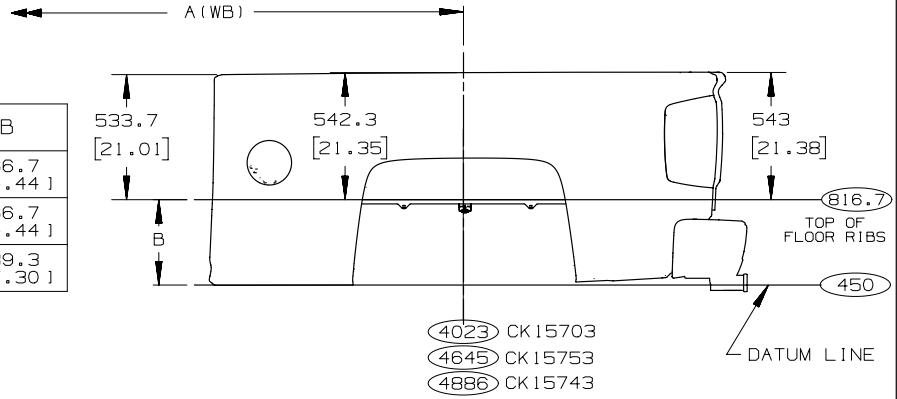

SILLS,BOX 6'6", CK15703/53,CK15743,2014 SHOWN CK15703 18DEC2012 AW [ ]=INCHES ANB86203.4

FULL SIZE C/K LD PICKUPS

Inside Panel, 8' Box – Pickup Box

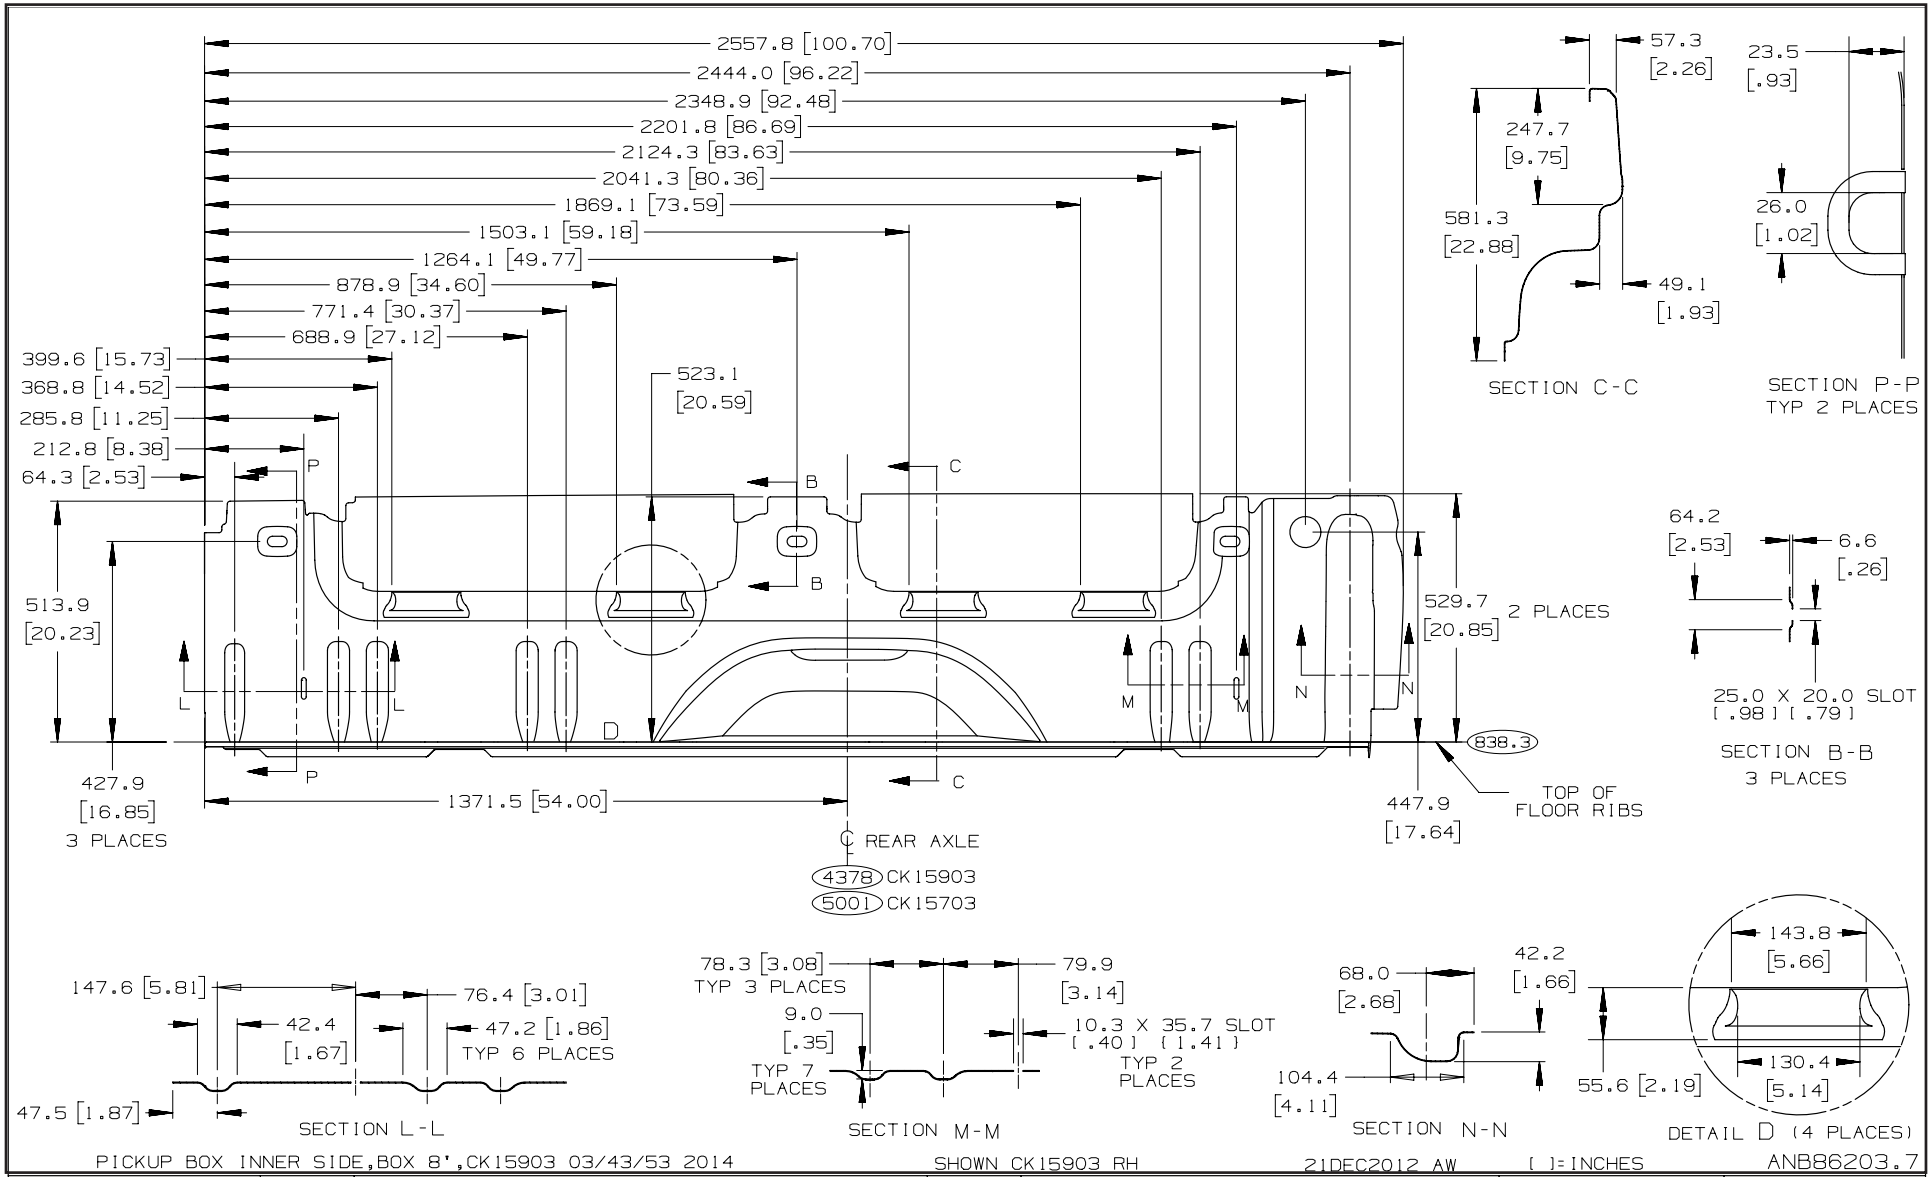

FULL SIZE C/K LD PICKUPS

Seating Positions and H Points 1st Row Front View, Pickups – C/K 100/200/300 (03/53/43)

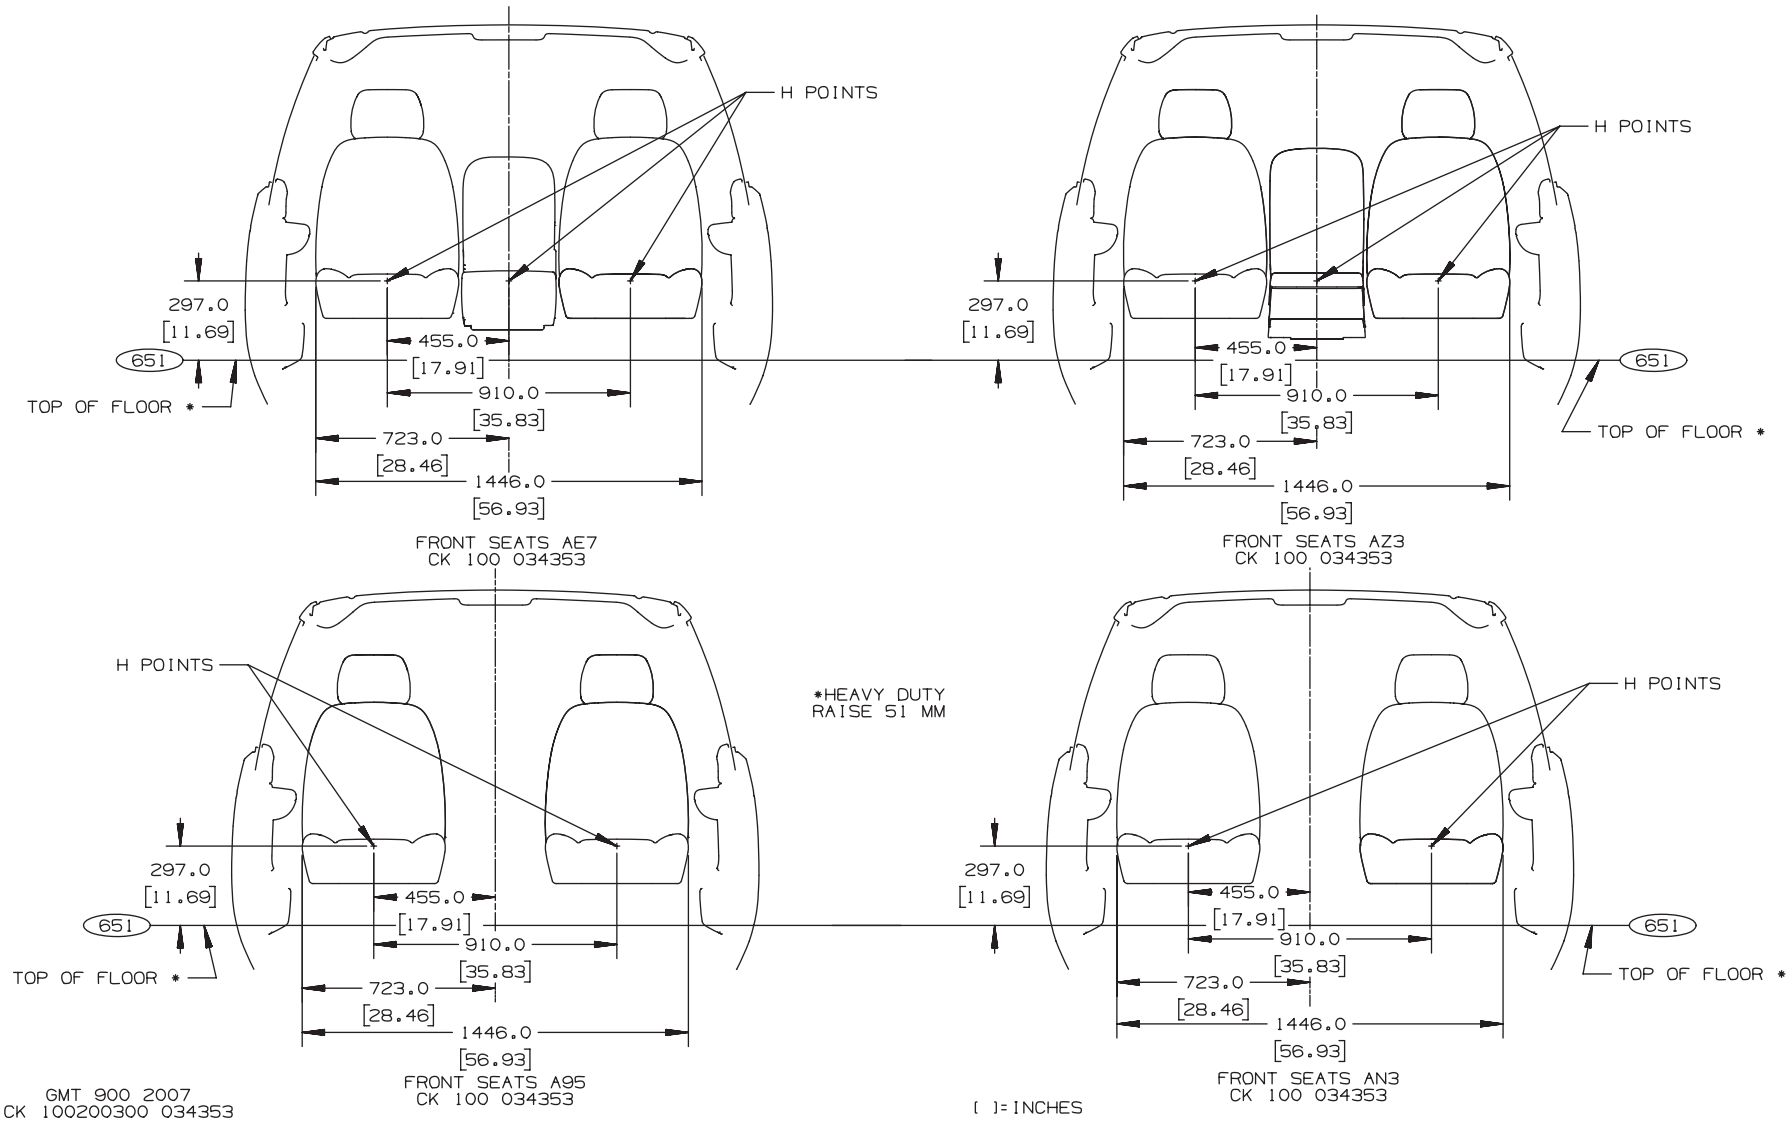

ANC32358.3

FULL SIZE C/K LD PICKUPS

Seating Positions and H Points 2nd Row Front View, Pickups – C/K 100/200/300 (03/53/43)

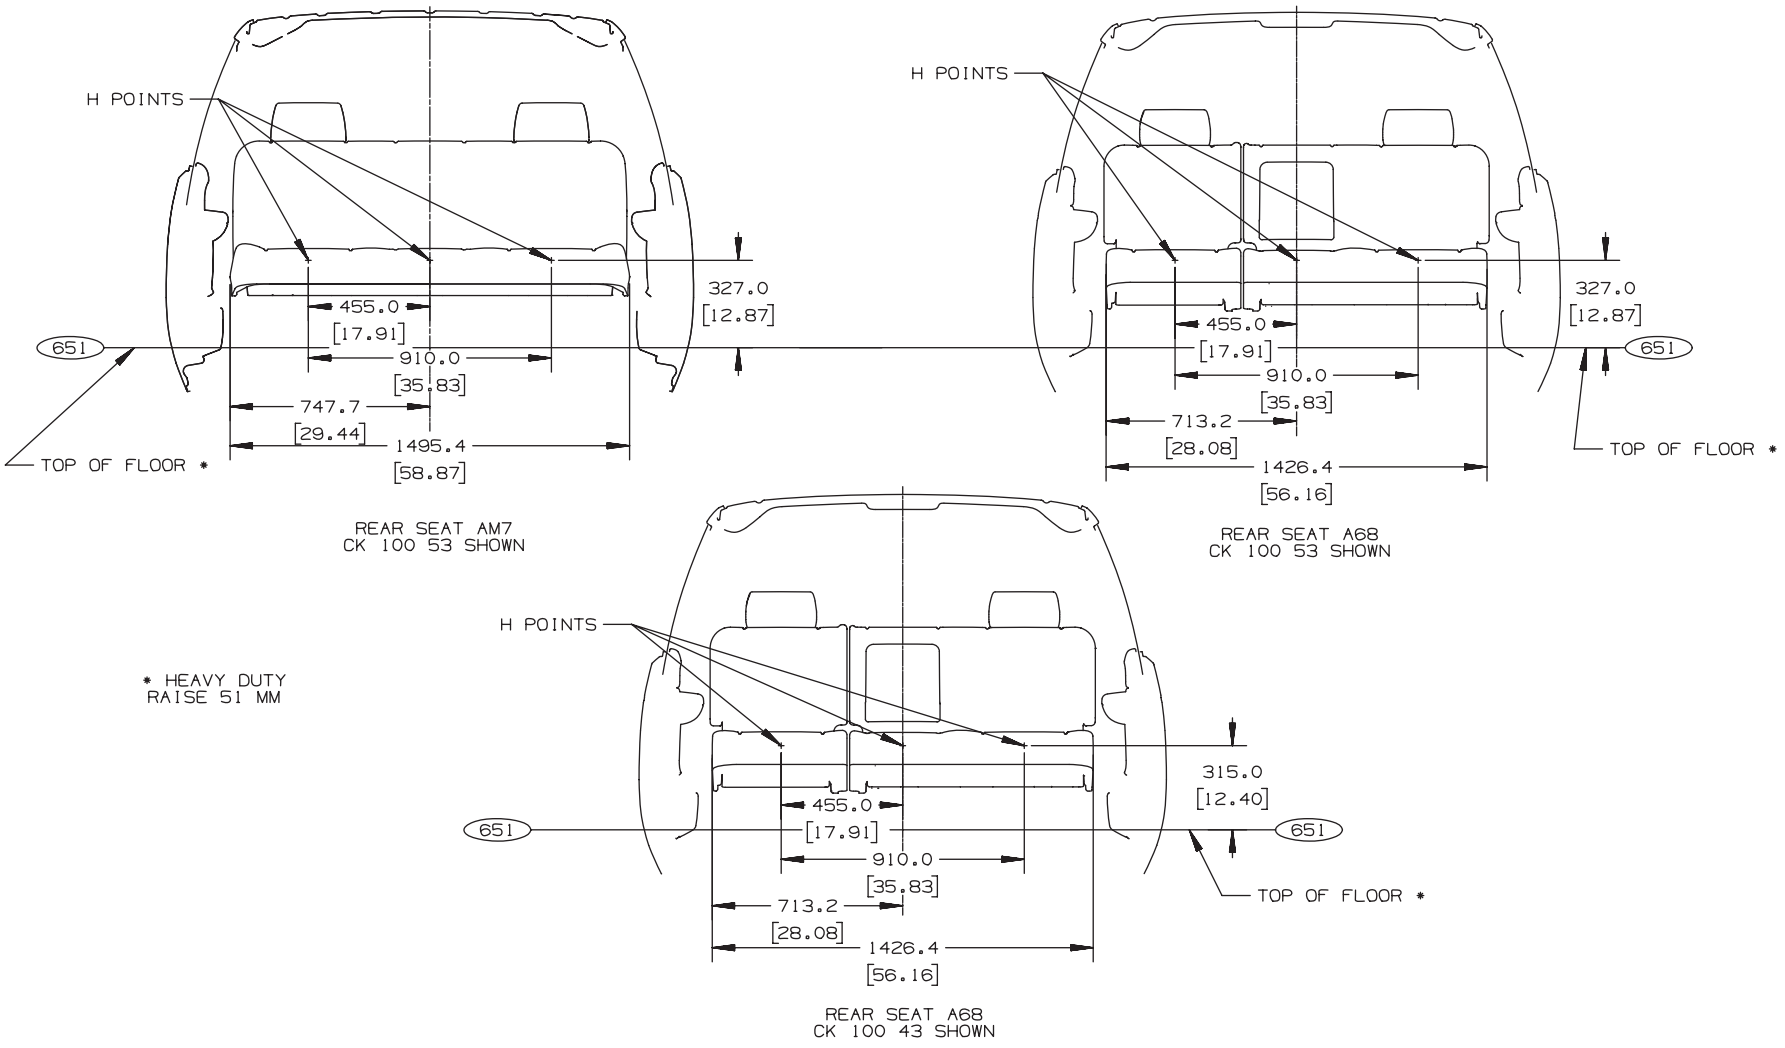

ANC32358.4

FULL SIZE C/K LD PICKUPS

Seating Positions and H Points Side View, Pickups – C/K 100/200/300 (03/53/43)

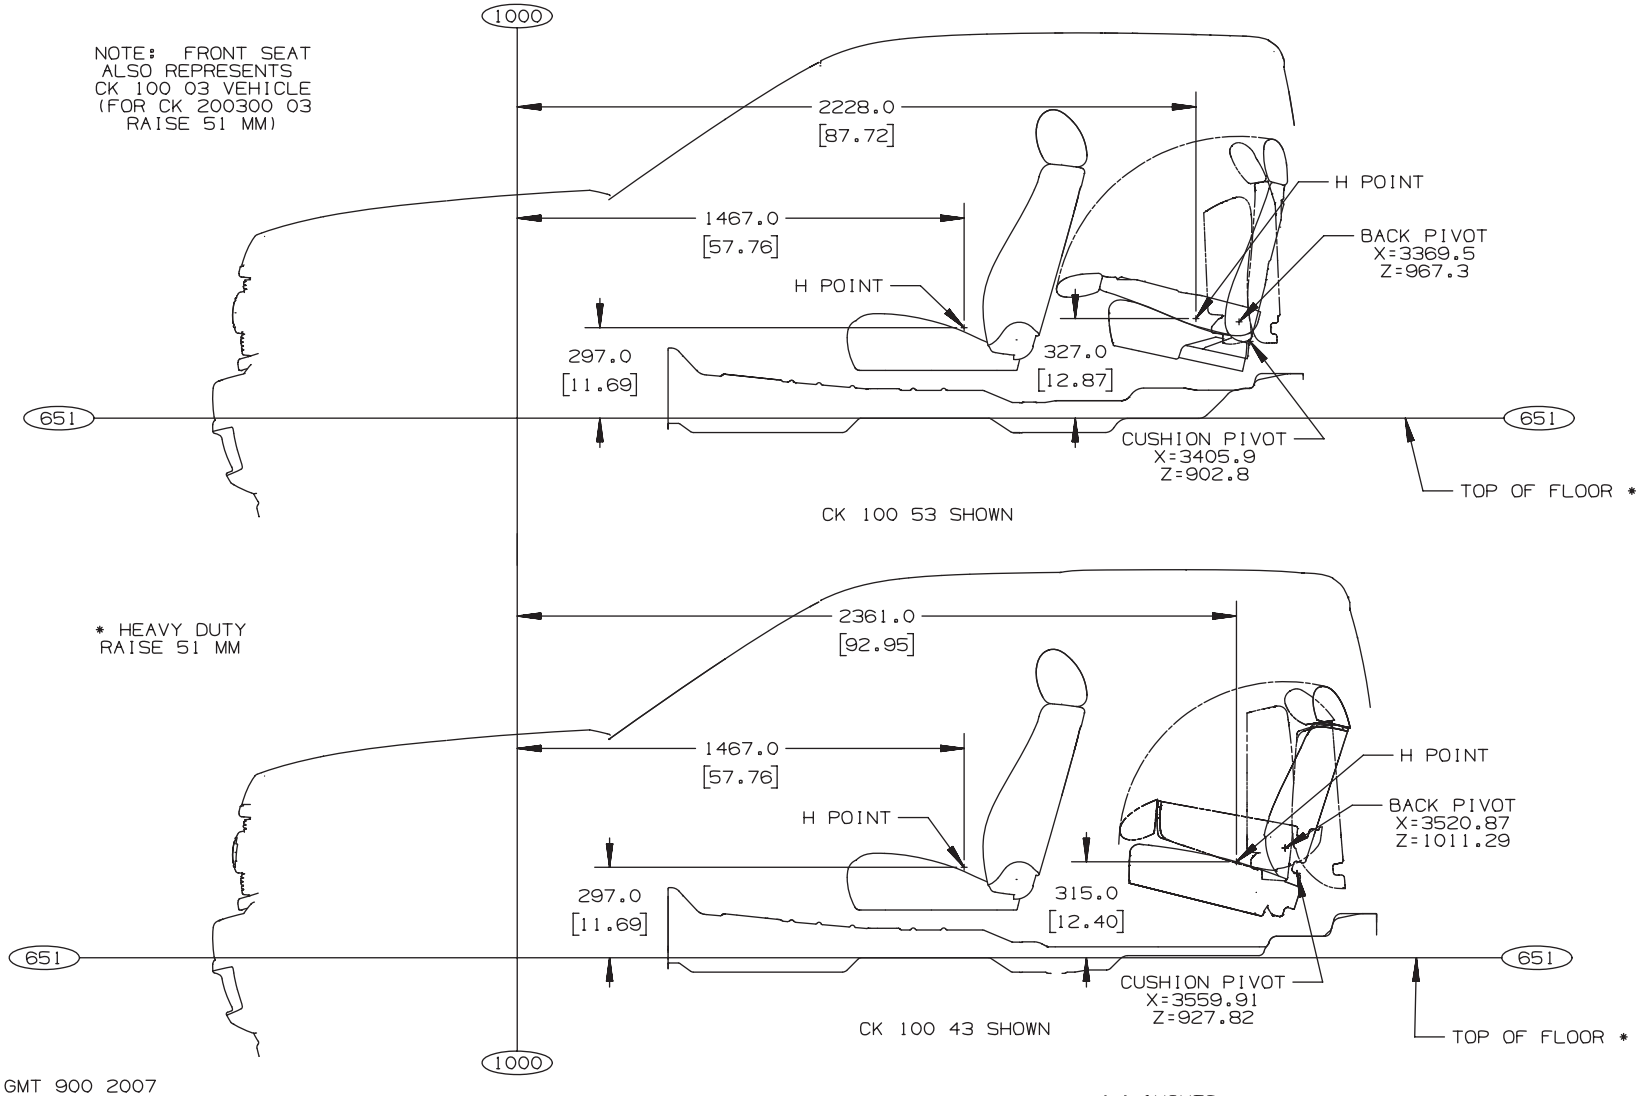

ANC32358.5

C/K 100/200/300 (03/53) – Seat Mounting Holes Locations – Floor

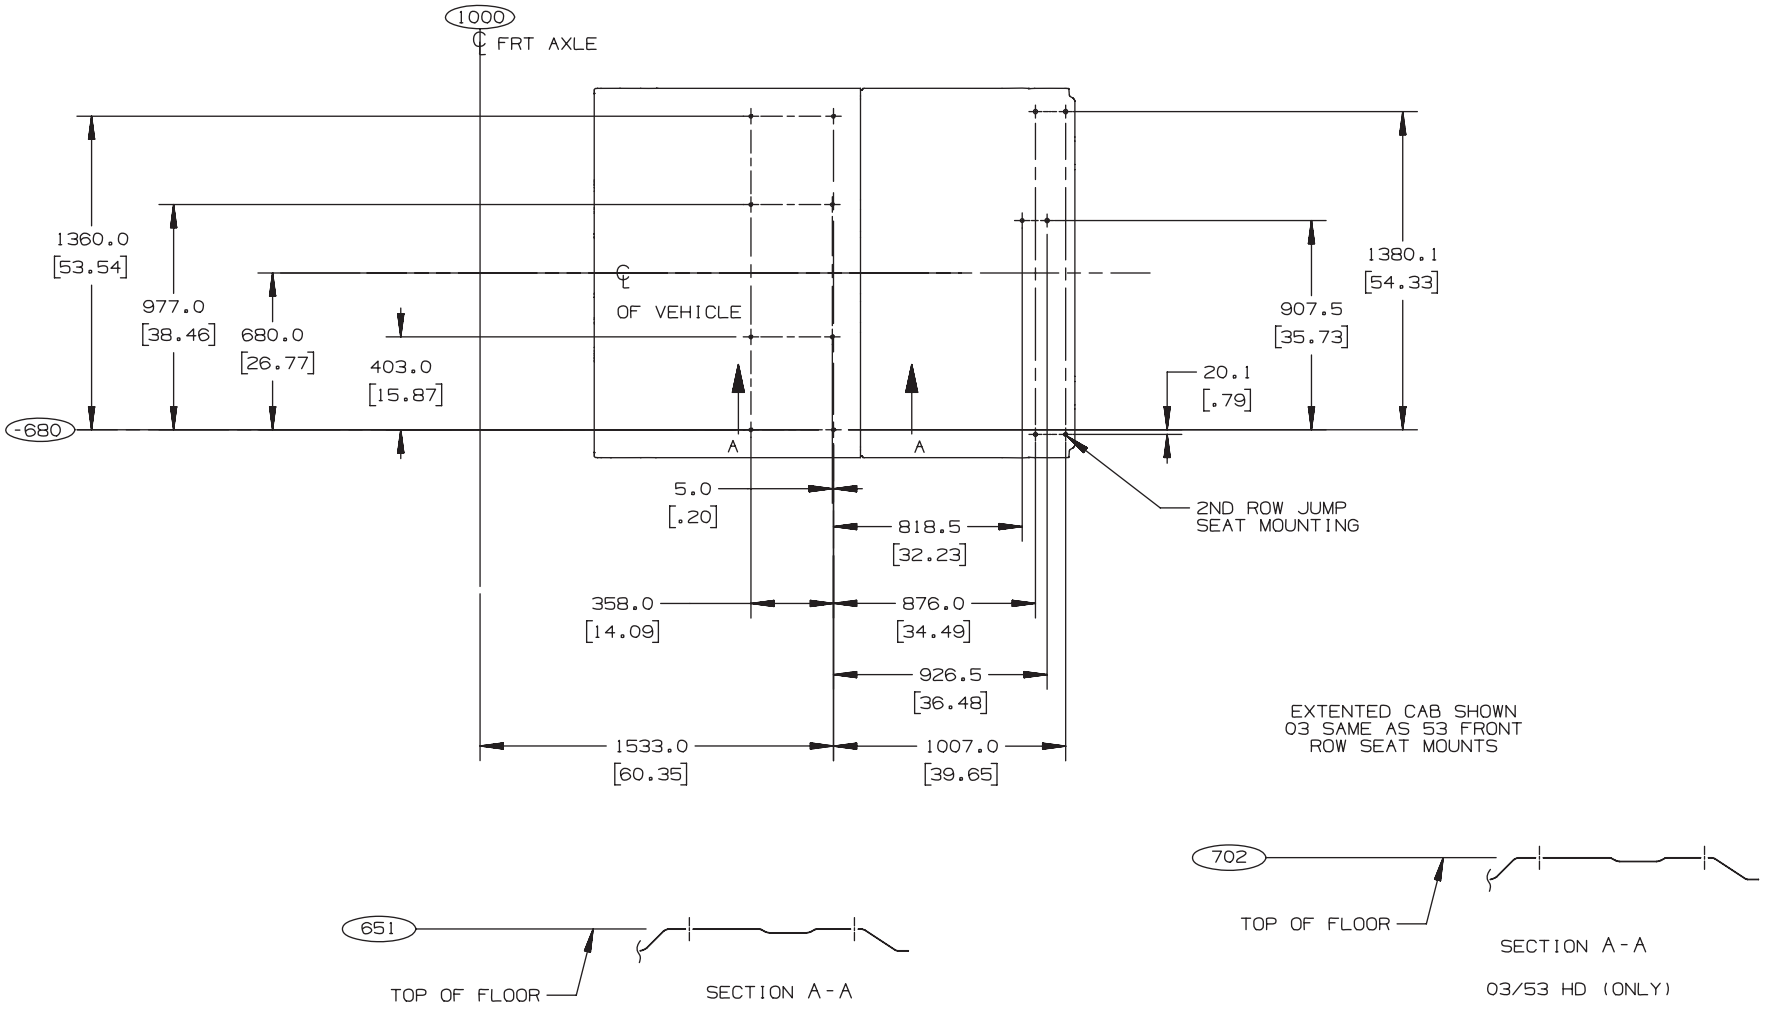

GMT900 C/K 100/200/300 03/53 SEAT MOUNT LOCATIONS 2008

[ ]=INCHES

ANB51264.3

FULL SIZE C/K LD PICKUPS

C/K 15743 – Seat Mounting Holes Locations – Floor

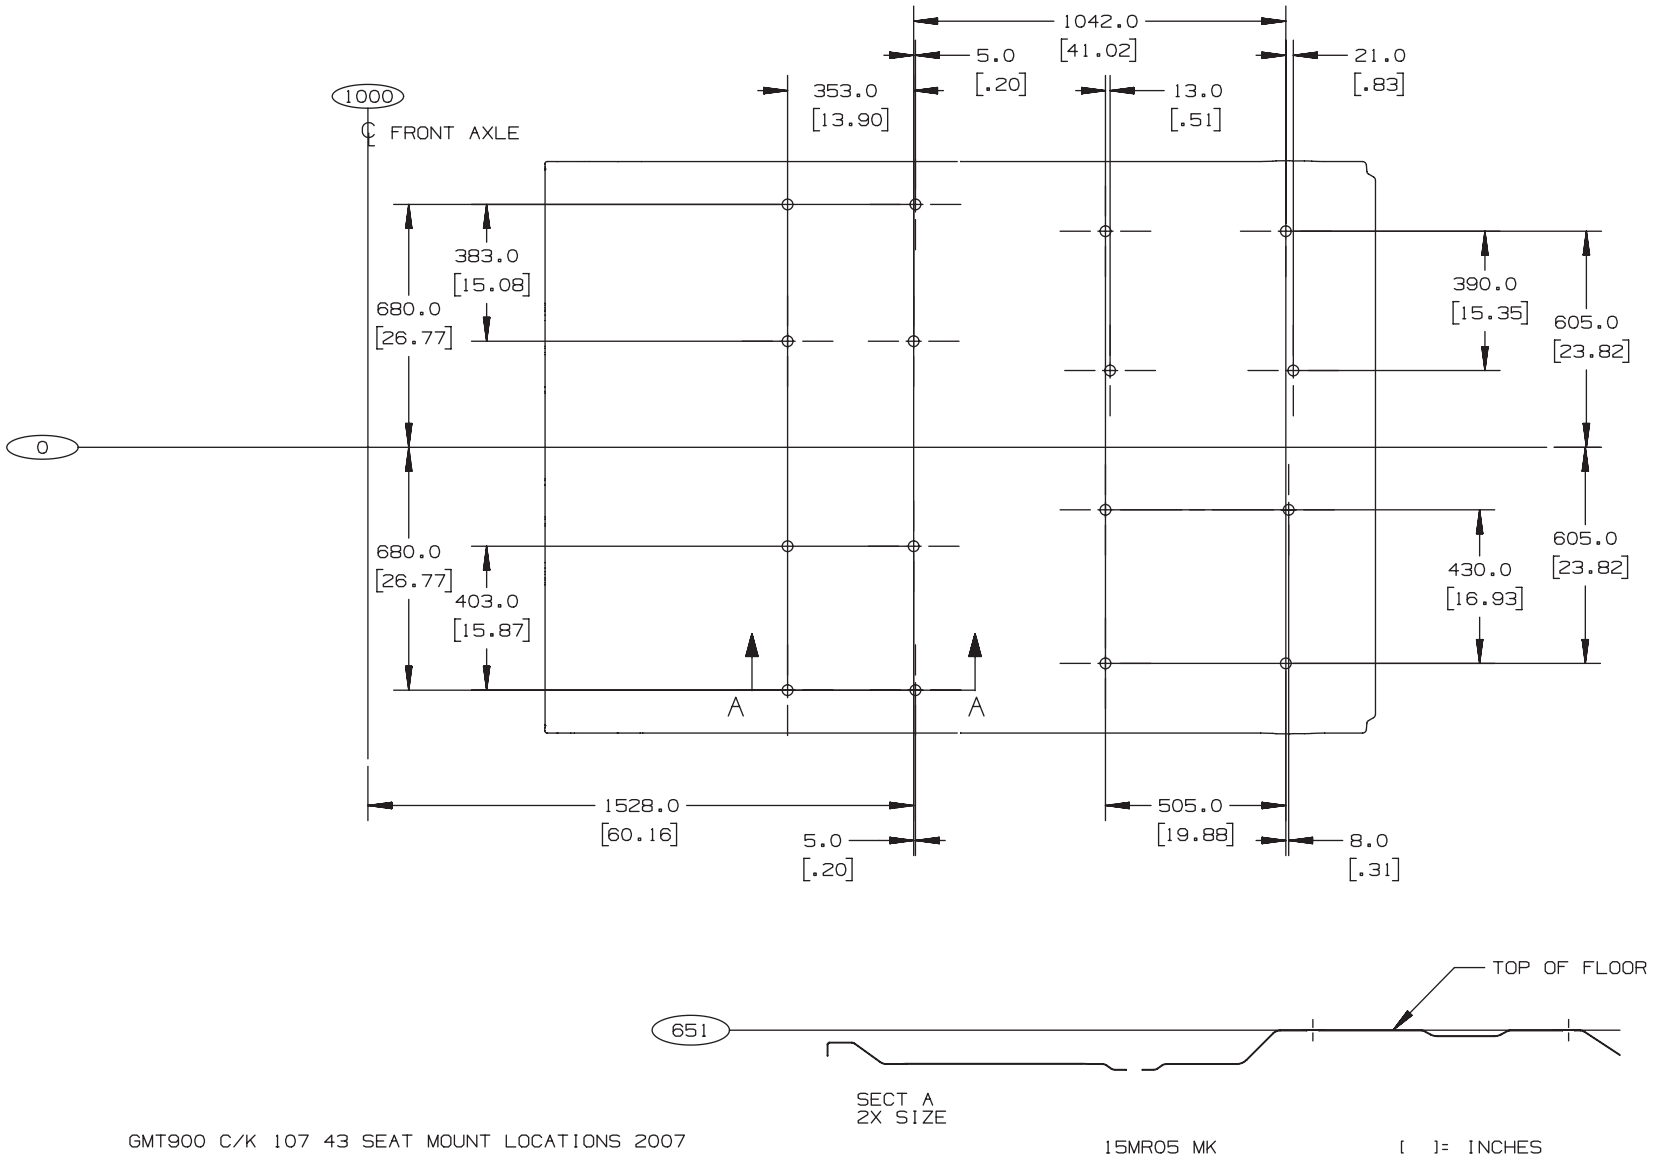

ANB46371.3

C/K 100 (00) and C/K 200 (00) – Datum Hole Location

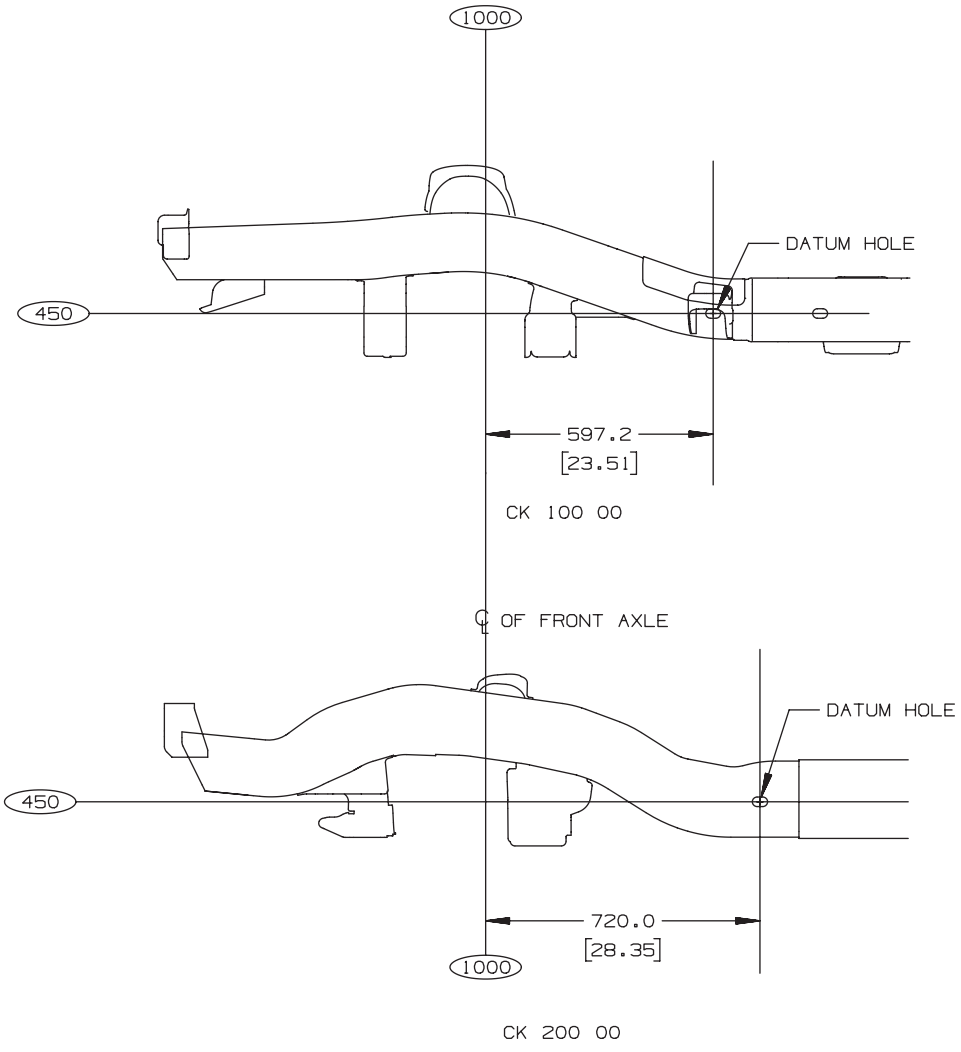

GMT 900 CK100200 00 FRAME DATUM LOCATIONS

[ ] = INCHES

ANC30752.3

C/K 15703 – Frame Rail and Crossmember Locations

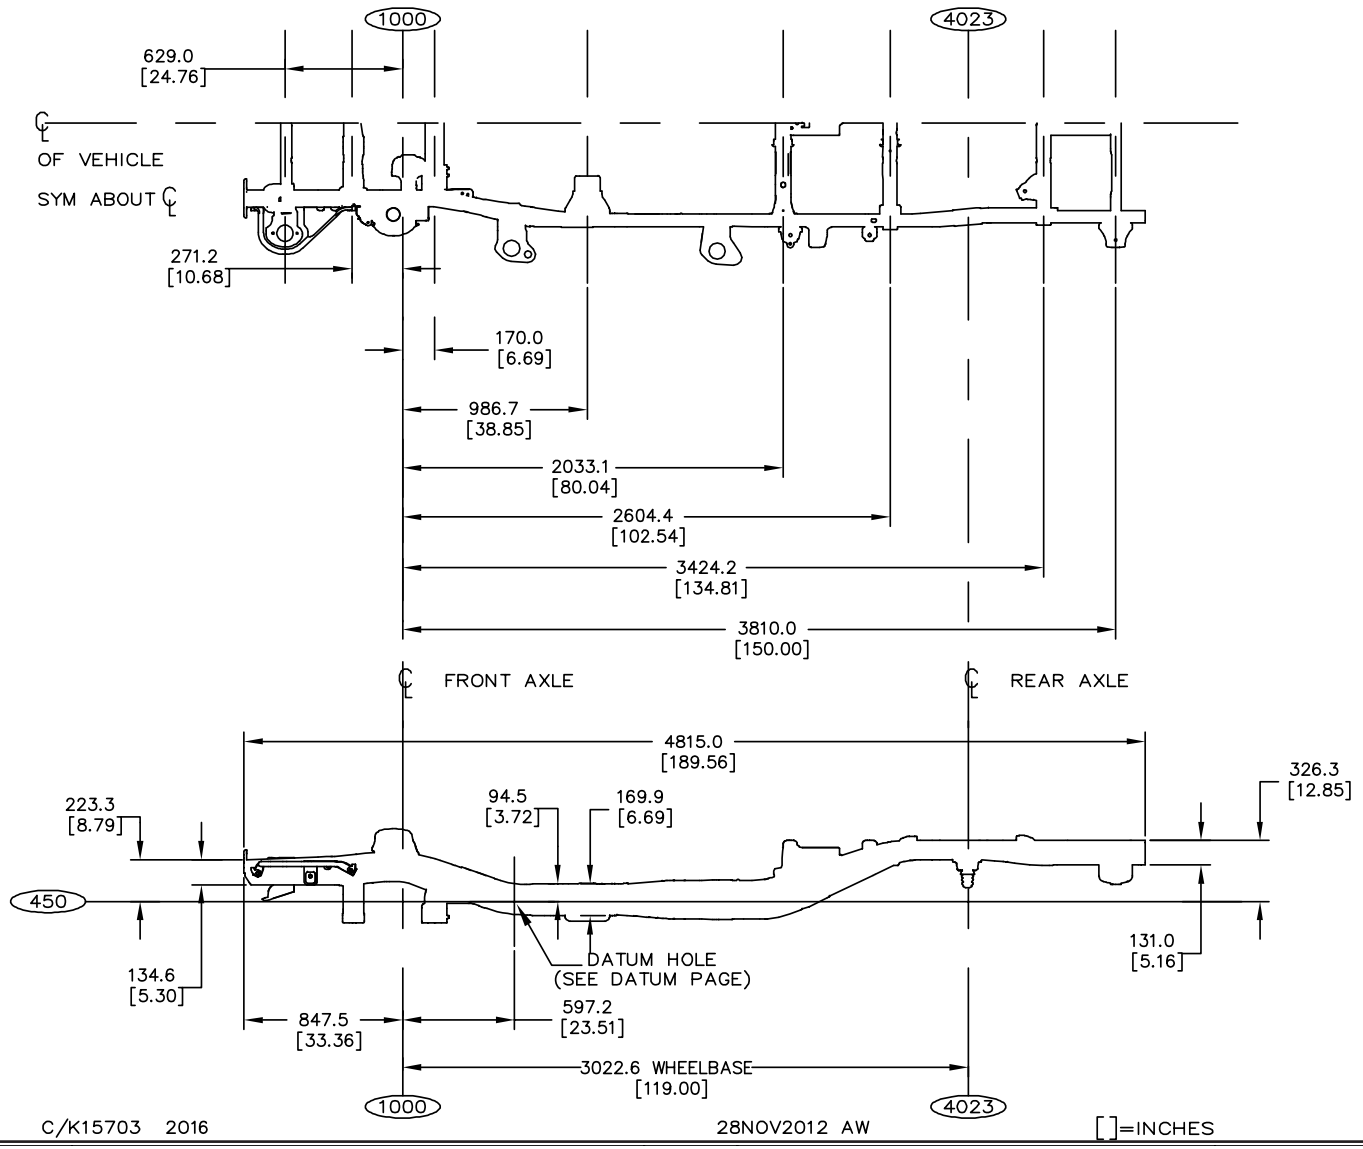

FULL SIZE C/K LD PICKUPS

C/K 15903 – Frame Rail and Crossmember Locations

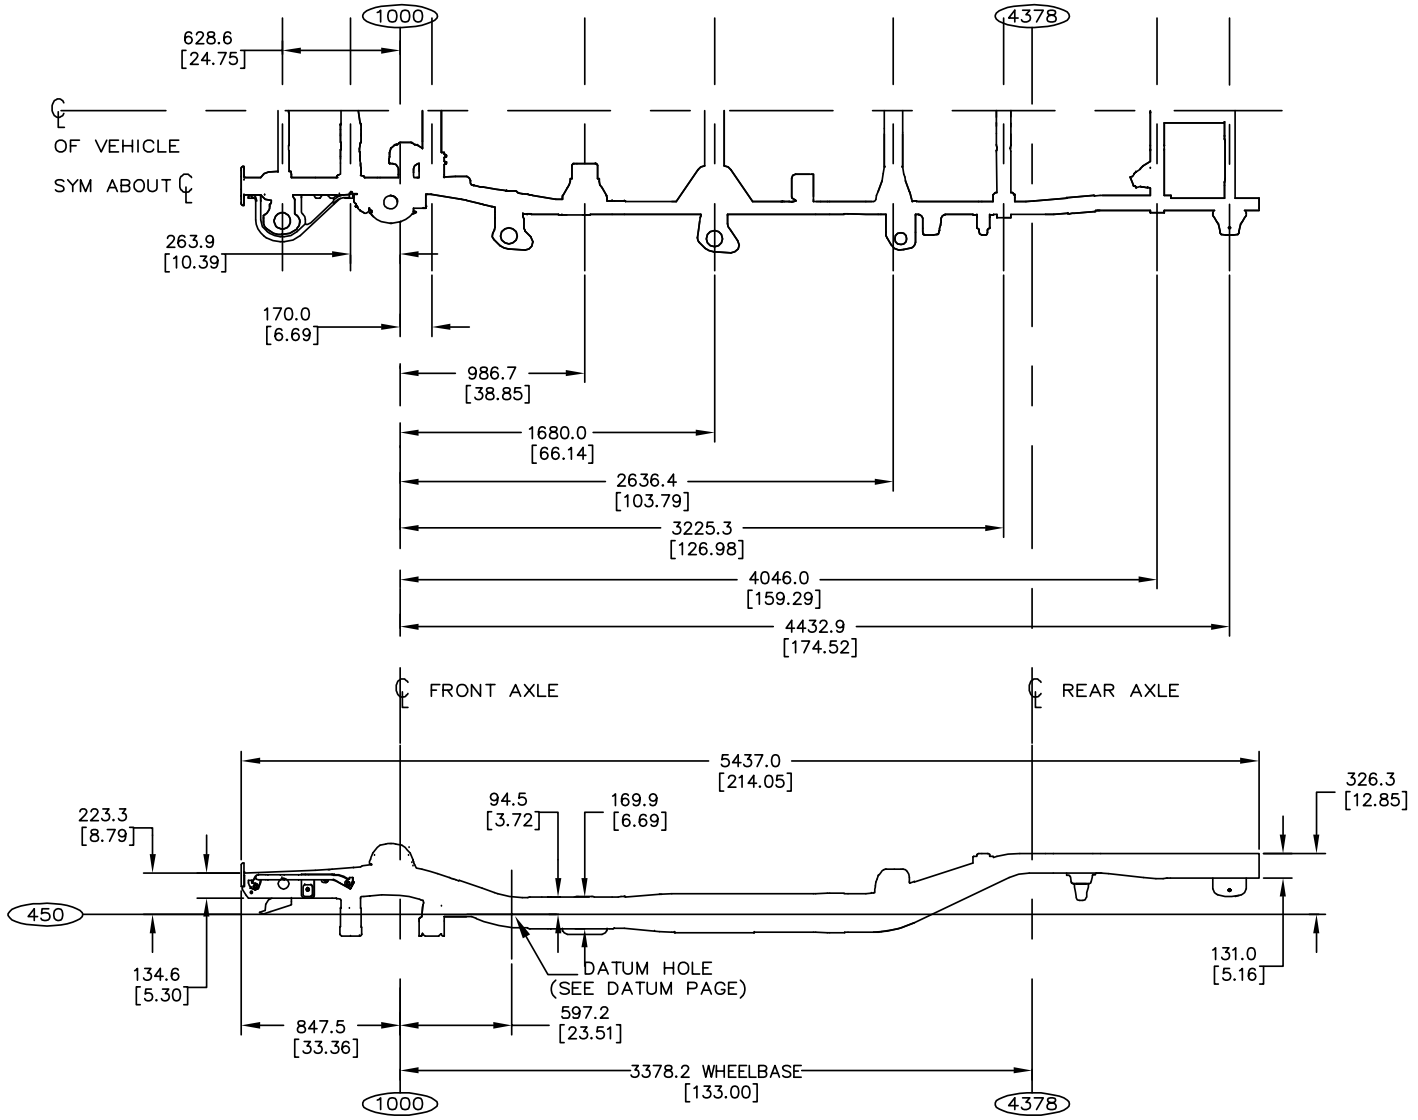

FULL SIZE C/K LD PICKUPS

C/K 15753 – Frame Rail and Crossmember Locations

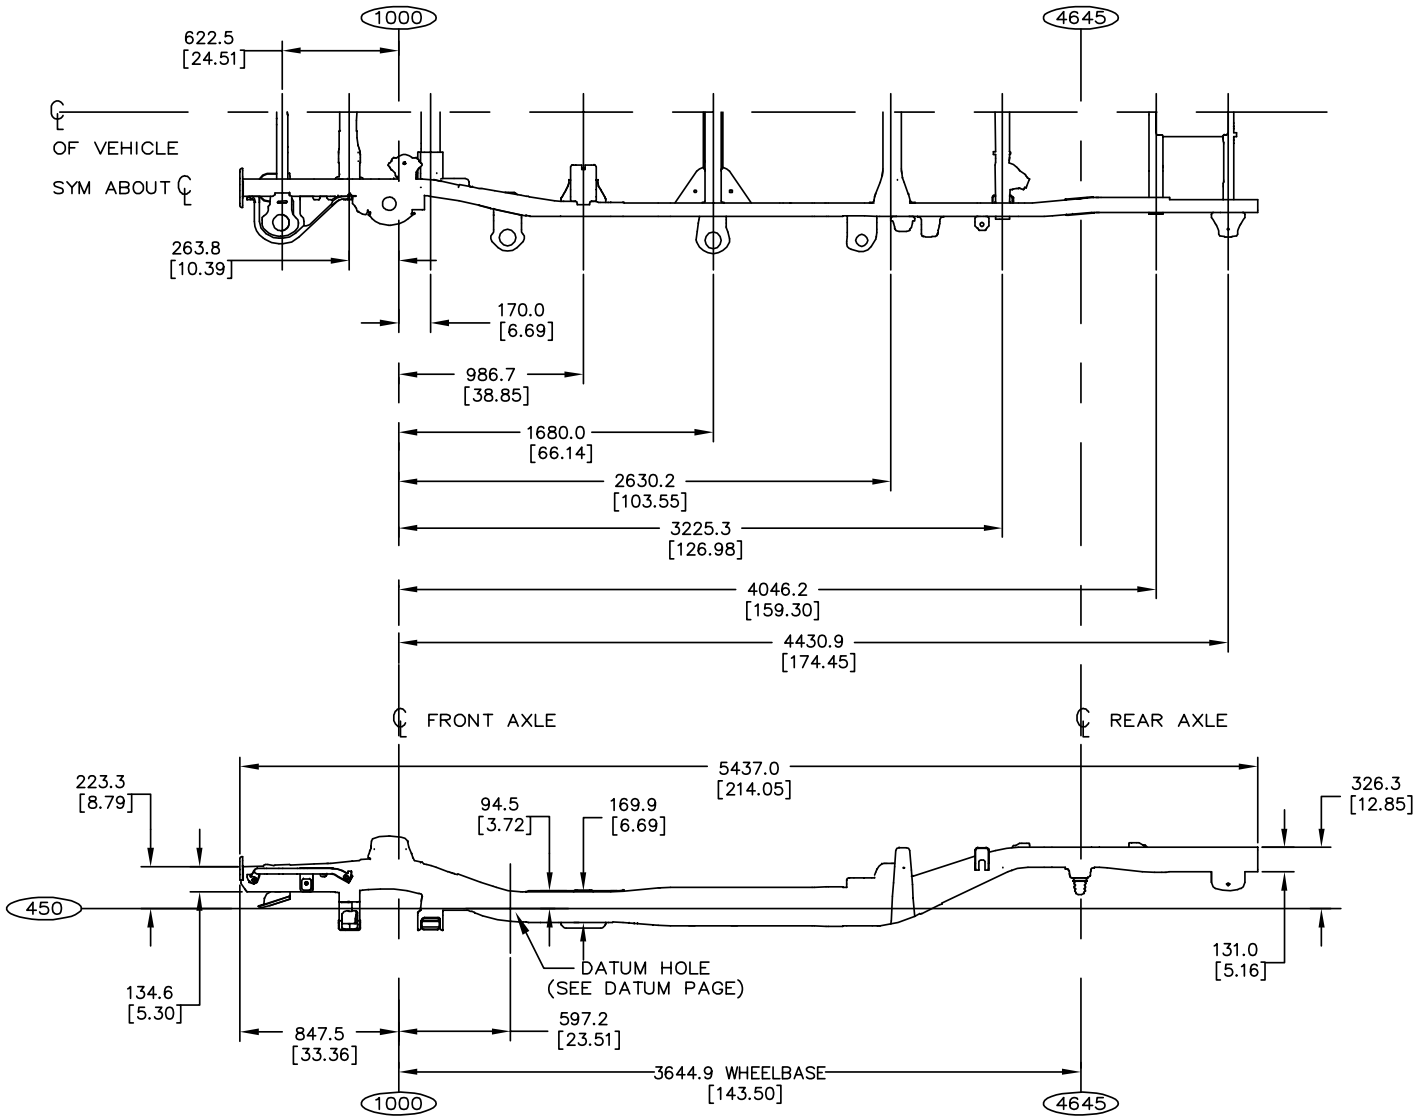

FULL SIZE C/K LD PICKUPS

C/K 15743 – Frame Rail and Crossmember Locations

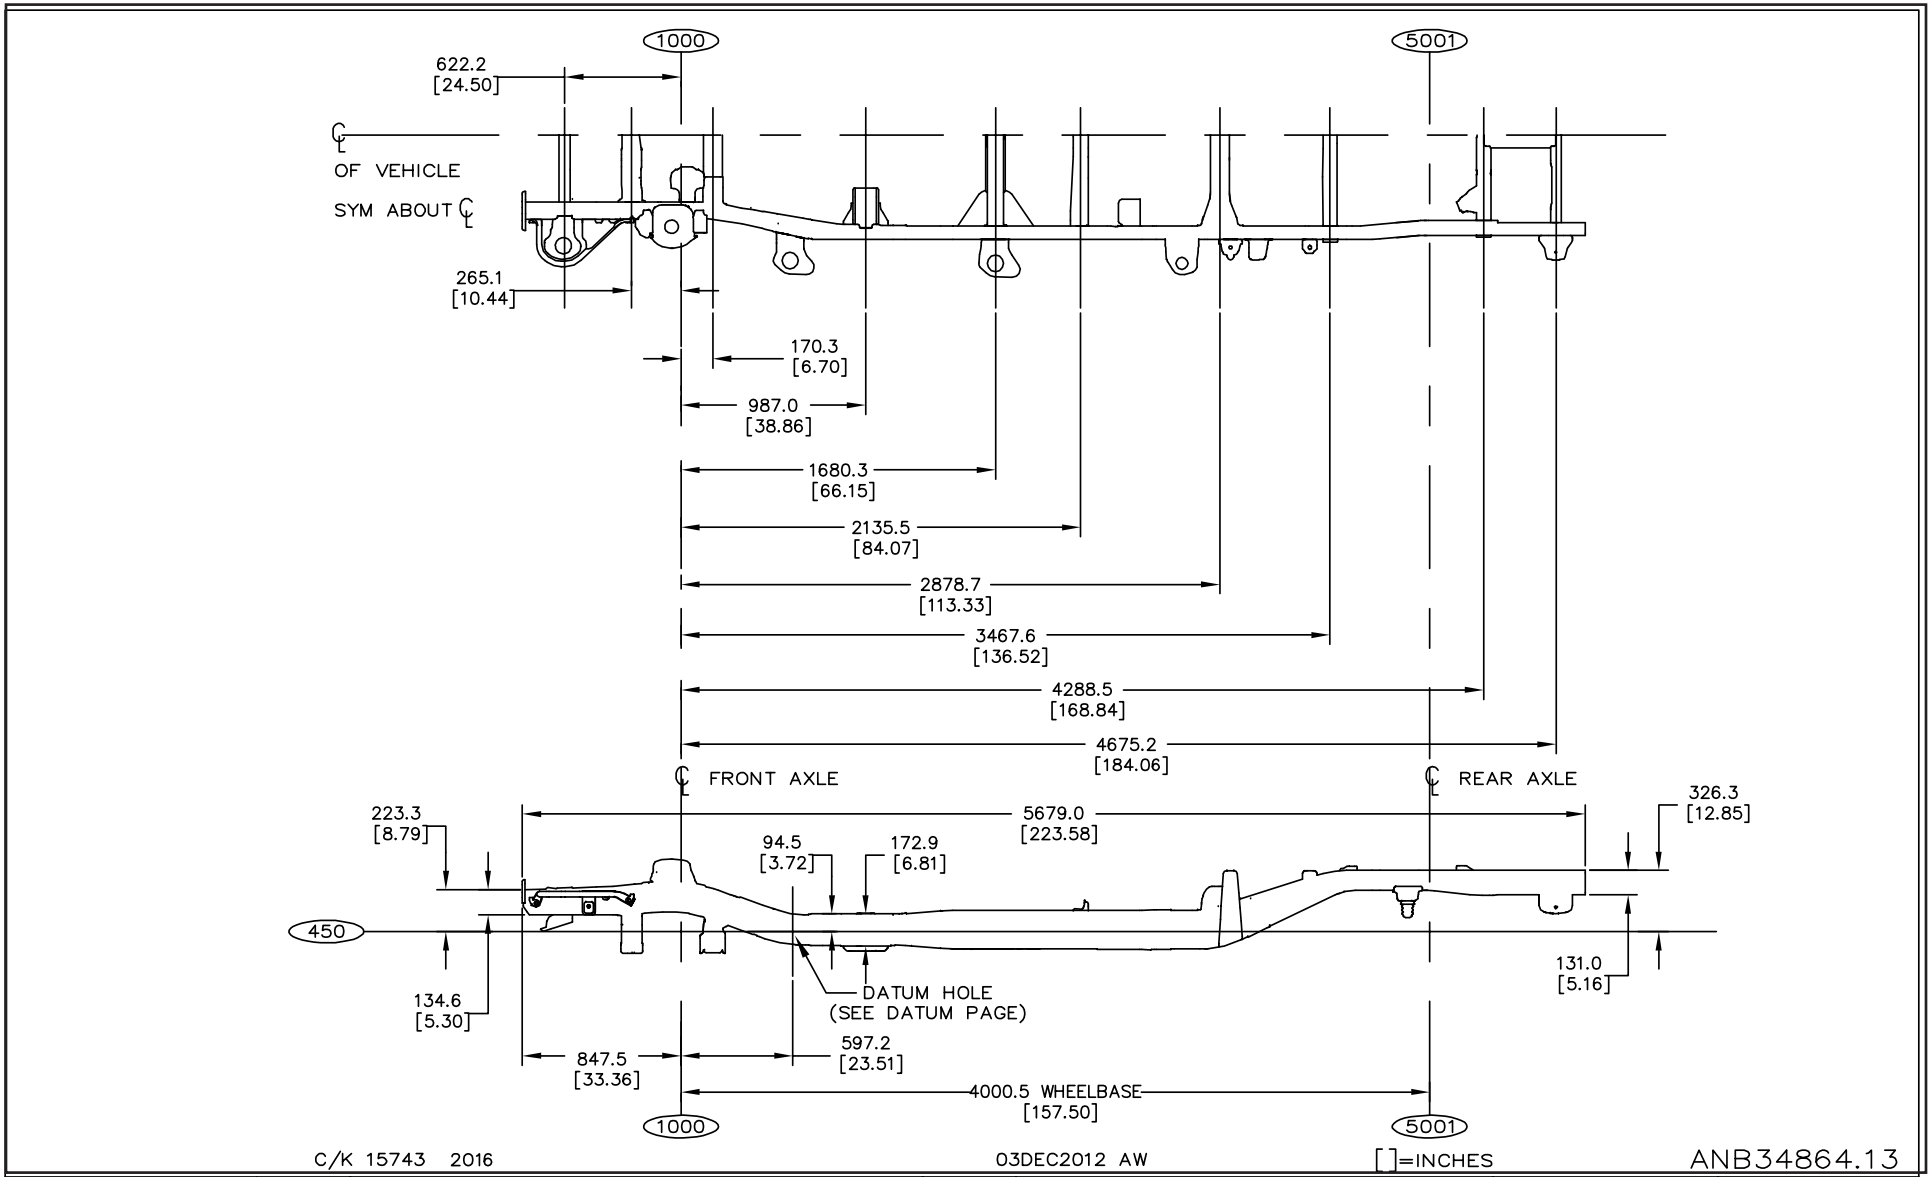

C/K 15543 – Frame Rail and Crossmember Locations

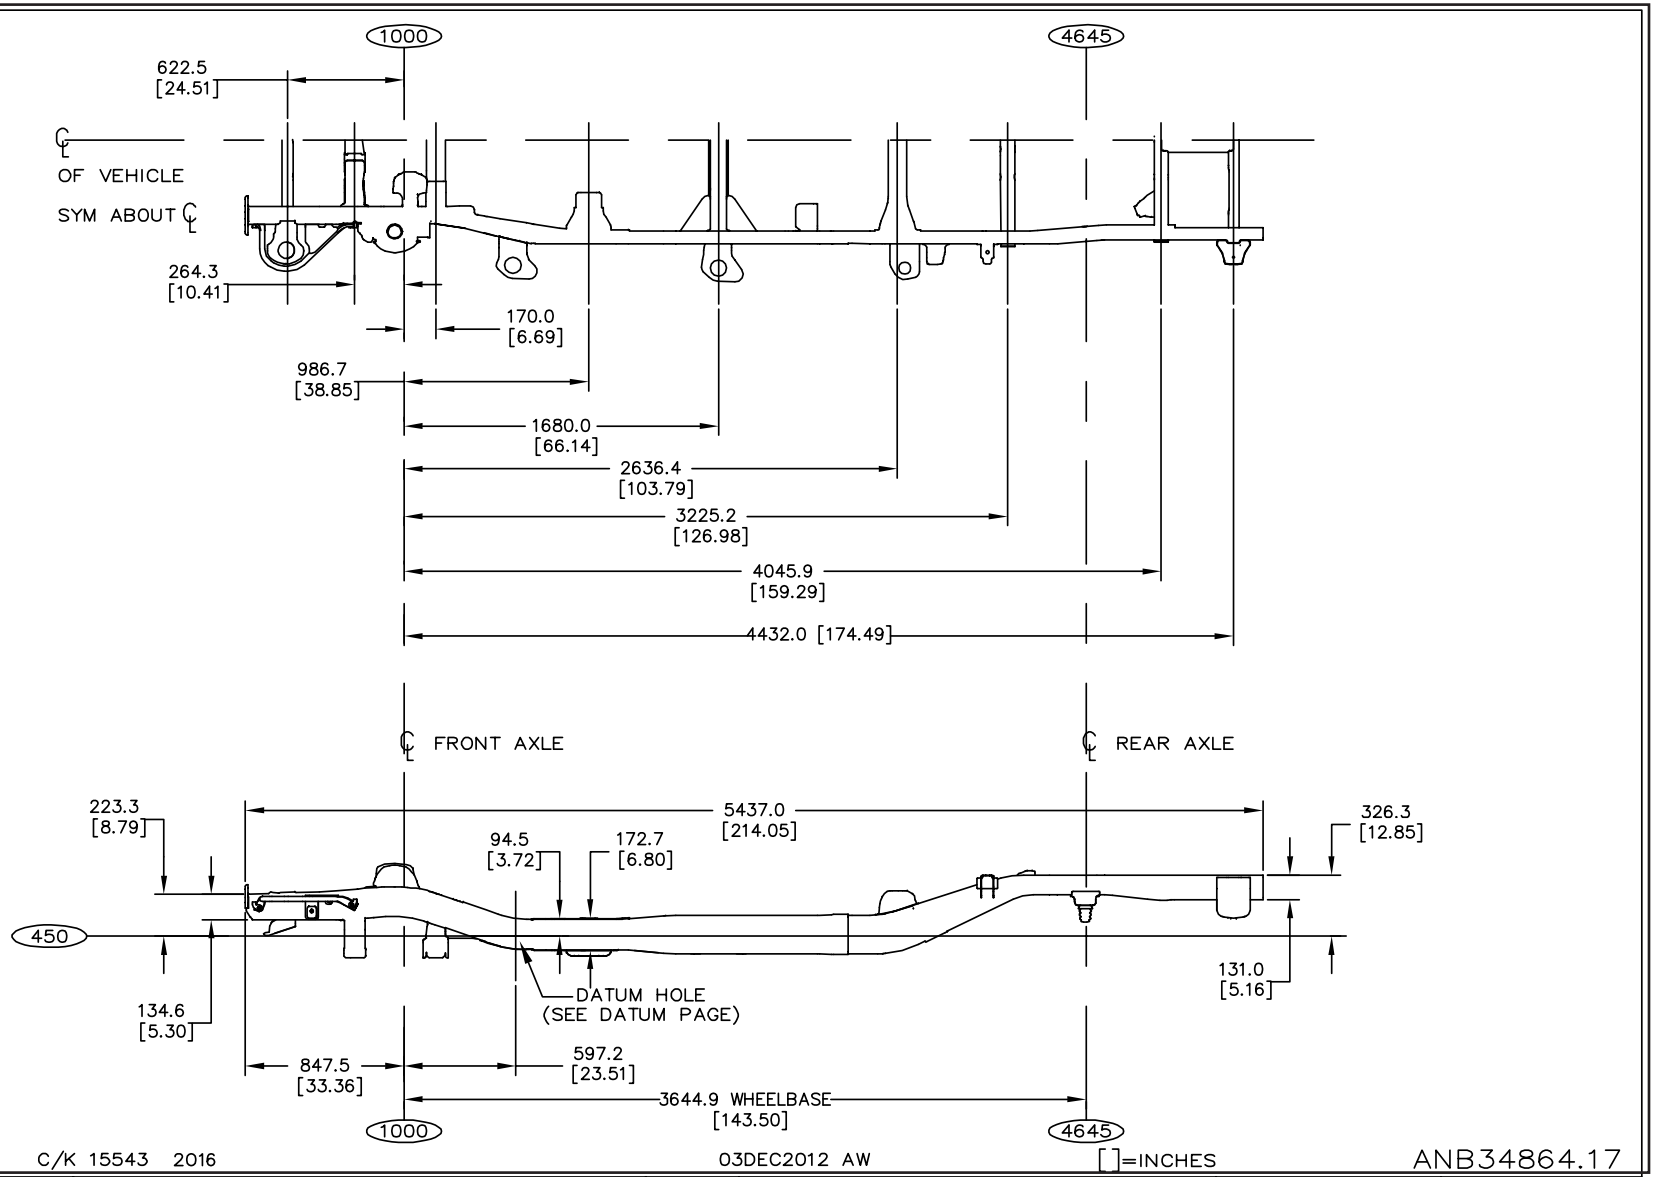

FULL SIZE C/K LD PICKUPS

C/K 1000 Series Pickups – Spare Tire Location

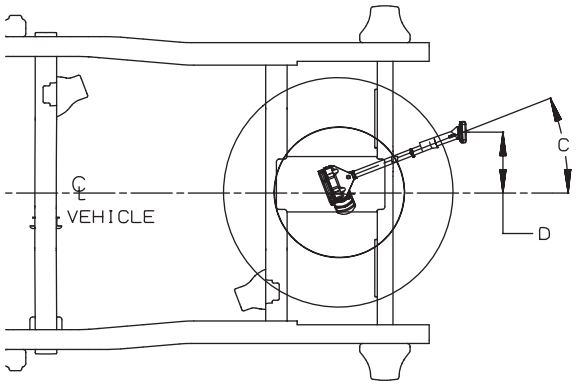

MODEL	TIRE	A	B	C	D	E	F
CK10703	P265/75R-17	923.0 [36.34]	81.0 [3.17]	21°	216.3 [8.50]	1072.3 [42.22]	240.0 [9.45]
CK10753	P265/70R-17	945.5 [37.22]	81.0 [3.17]	21°	216.3 [8.50]	990.5 [39.00]	240.0 [9.45]
CK10903	P265/70R-17	945.5 [37.22]	81.0 [3.17]	21°	216.3 [8.50]	1094.8 [43.10]	222.0 [8.74]
CK10953	P265/70R-17	923.0 [36.34]	81.0 [3.17]	16.5°	216.3 [8.50]	1197.0 [47.12]	222.0 [8.74]
CK10543	P265/70R-17	895.5 [35.25]	81.0 [3.17]	21°	203.2 [8.00]	1020.5 [40.18]	240.0 [9.45]
CK10553	P265/70R-17	631.5 [24.90]	81.0 [3.17]	21°	216.3 [8.50]	1072.3 [42.22]	222.0 [8.74]

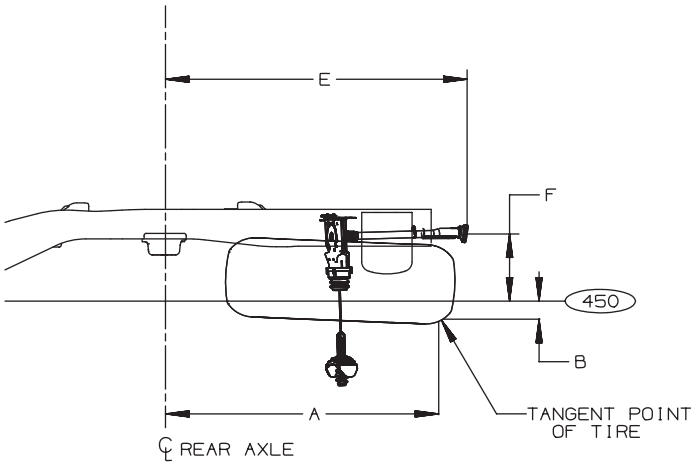

GMT900 2007 SPARE TIRE TRUCKS 1000 SERIES

[ ]= INCHES

ANC39360.4

Pickups C/K 100 (03/53/43) – Platform Hitch

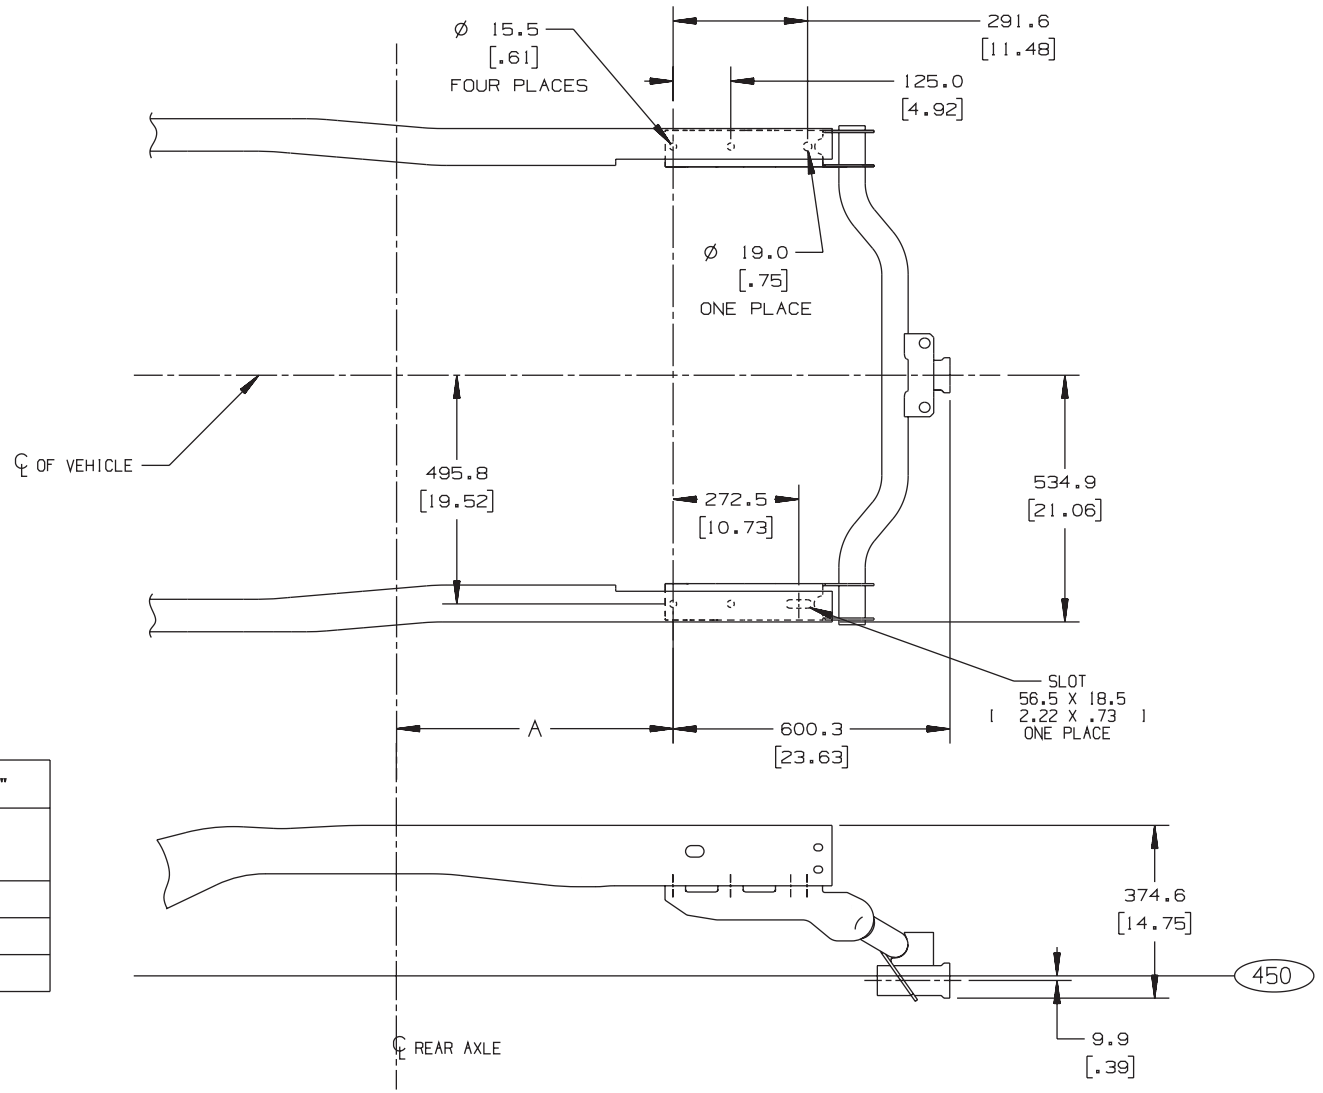

MODEL	℄ REAR AXLE	DIM "A"
C/K 155 43 C/K 157 53	4645	599.6
C/K 157 03	4023	599.8
C/K 159 03	4378	724.2
C/K 159 53	5001	723.9

GMT900 C/K 100 03/43/53 2008

[ ]= INCHES

ANB84248.3

Front Axle Tire Data Drawing – C/K 10000 Pickups

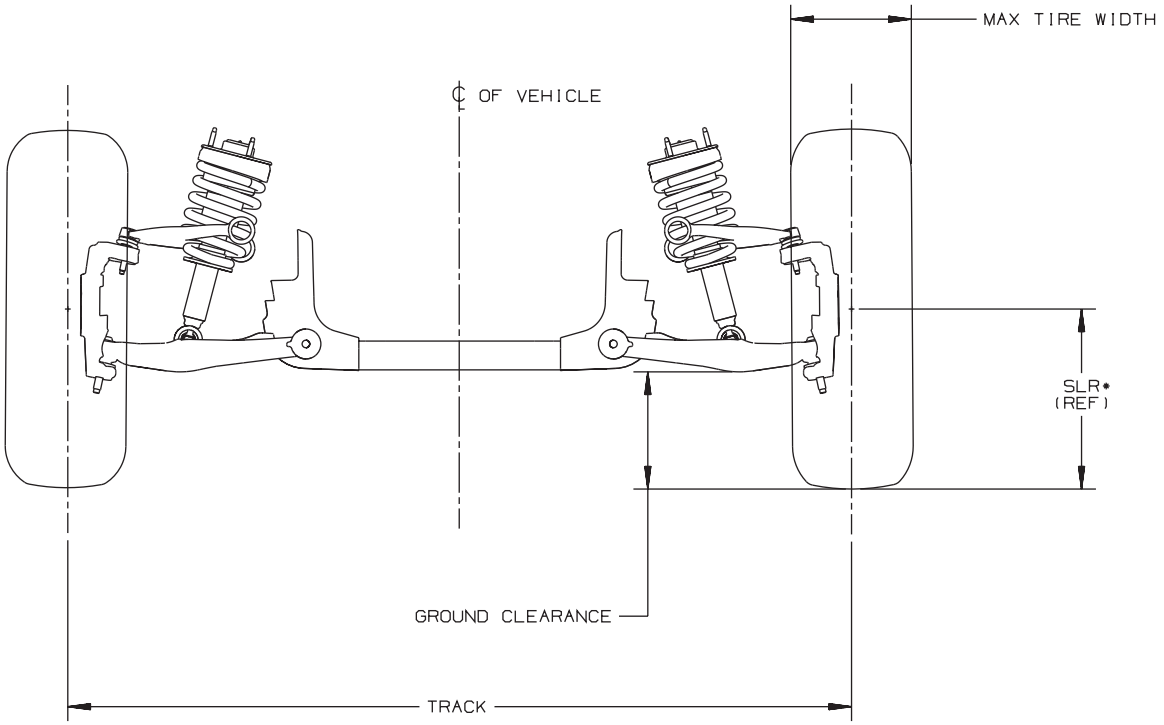

VYU = SNOW PLOW
Z83 = CHASSIS PACKAGE SOLID SMOOTH RIDE
Z85 = CHASSIS PACKAGE INCREASED CAPACITY
E63 = BODY EQUIPMENT FLEETSIDE PICKUP BOX
Z71 = CHASSIS PACKAGE OFF ROAD
ZW7 = CHASSIS PACKAGE PREMIUM SMOOTH RIDE

*MINIMUM GROUND CLEARANCE TO BE CALCULATED BY USING GROSS AXLE WEIGHT AND RECOMMENDED TIRE PRESURE

GMT900 UTILITIES 1000 SERIES/TRUCK 1000 SERIES FRONT AXLE/TIRE DATA (2007)

[ ]=INCHES

ANB46140.13

FULL SIZE C/K LD PICKUPS

Front Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	MAX TIRE WIDTH	GROUND CLEARANCE
CK15703	Z83/Z85/E63/Z71/Z60	370	P265/65R18	6400	SINGLE	1726.3	31.0	TBD	217.6
C15753	Z83/Z85/E63/Z71/Z60	351	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	181.4
C15753	Z83/Z85/E63/Z71/Z60	368	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	198.6
C15753	Z83/Z85/E63/Z71/Z60	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	206.7
C15753	Z83/Z85/E63/Z71/Z60	368	P275/55R20	6800	SINGLE	1726.3	31.0	298.0	199.2
C15753	Z83/Z85/E63/Z71/Z60	359	LT245/70R17	7000	SINGLE	1726.3	31.0	266.0	195.7
C15753	Z83/Z85/E63/Z71/Z60	366	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	202.7
C15753	Z83/Z85/E63/Z71/Z60	368	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	205.3
K15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	207.6
K15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	189.9
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	208.0
K15753	Z83/Z85/E63/Z71/Z60	356	LT245/70R17	7200	SINGLE	1726.3	31.0	266.0	199.1
K15753	Z83/Z85/E63/Z71/Z60	363	P265/70R17	7200	SINGLE	1726.3	31.0	281.0	185.9
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7200	SINGLE	1726.3	31.0	298.0	208.0
C15903	Z83/Z85/E63/Z71	353	P245/70R17	6400	SINGLE	1726.3	31.0	266.0	195.6
C15903	Z83/Z85/E63/Z71	370	P265/70R17	6400	SINGLE	1726.3	31.0	281.0	203.4
C15903	Z83/Z85/E63/Z71	370	P265/65R18	6400	SINGLE	1726.3	31.0	286.0	202.8
K15903	VYU/Z83/Z85/E63/Z71	347	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	173.8
K15903	VYU/Z83/Z85/E63/Z71	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	195.8
K15903	VYU/Z83/Z85/E63/Z71	359	LT24570R17	6800	SINGLE	1726.3	31.0	266.0	184.8
K15903	VYU/Z83/Z85/E53Z71	365	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	191.1
C15953	Z83/Z85/E63/Z71	350	P245/70R17	6900	SINGLE	1726.3	31.0	266.0	186.2
C15953	Z83/Z85/E63/Z71	369	P265/65R18	6900	SINGLE	1726.3	31.0	286.0	204.7
C15953	Z83/Z85/E63/Z71	367	P265/70R17	6900	SINGLE	1726.3	31.0	291.0	202.4
K15953	Z83/Z85/E63/Z71	348	P245/70R17	7000	SINGLE	1726.3	31.0	266.0	194.0
K15953	Z83/Z85/E63/Z71	365	P265/70R17	7000	SINGLE	1726.3	31.0	291.0	211.2
K15953	Z83/Z85/E63/Z71	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	212.6

GMT900 TRUCKS FRONT AXLE/TIRE DATA 1000 SERIES (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.17

FULL SIZE C/K LD PICKUPS

Front Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	MAX TIRE WIDTH	GROUND CLEARANCE
C15543	Z71/783/Z85/E63	346	LT245/70R17	6800	SINGLE	1726.3	31.0	266.0	183.0
C15543	Z71/783/Z85/E63	346	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	183.0
C15543	Z71/783/Z85/E63	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	206.7
C15543	Z71/783/Z85/E63	359	LT245/70R17	6800	SINGLE	1726.3	31.0	266.0	195.7
C15543	Z71/783/Z85/E63	368	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	203.8
C15543	Z71/783/Z85/E63	368	P275/55R20	6800	SINGLE	1726.3	31.0	298.0	205.0
K15543	Z71/783/Z85/E63	365	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	211.4
K15543	Z71/783/Z85/E63	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	212.7
C15543	Z71/783/Z85/E63	368	P265/65R18	7100	SINGLE	1726.3	31.0	286.0	220.0
K15543	Z71/783/Z85/E63	365	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	204.0
K15543	Z71/783/Z85/E63	348	LT245/70R17	7000	SINGLE	1726.3	31.0	266.0	193.6
K15543	Z71/783/Z85/E63	348	P245/70R17	7000	SINGLE	1726.3	31.0	266.0	193.6
K15543	Z71/783/Z85/E63	356	LT245/70R17	7300	SINGLE	1726.3	31.0	266.0	202.5
K15543	Z71/783/Z85/E63	365	P275/55R20	7300	SINGLE	1726.3	31.0	298.0	211.4
K15543	Z71/783/Z85/E63	363	P265/70R17	7300	SINGLE	1726.3	31.0	281.0	208.7

GMT900 TRUCKS FRONT AXLE/TIRE DATA 1000 SERIES (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.18

FULL SIZE C/K LD PICKUPS

Rear Axle Tire Data Drawing – C/K 10000 Pickups

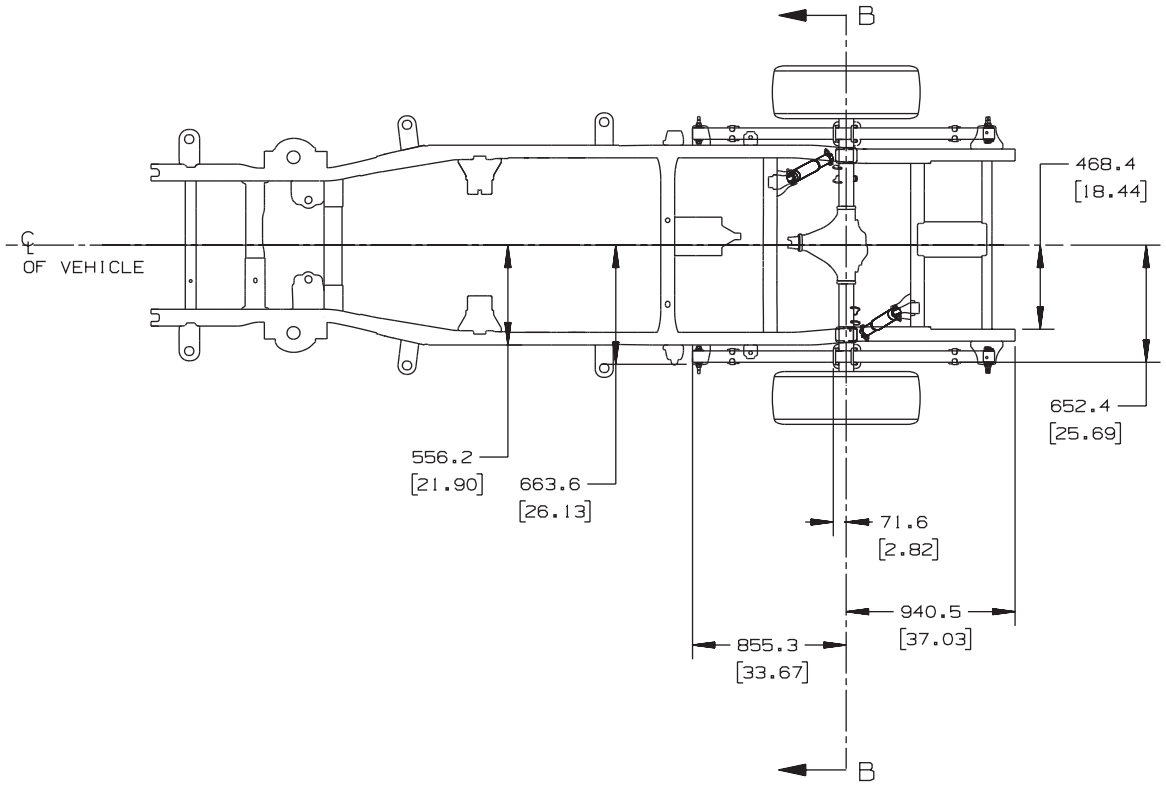

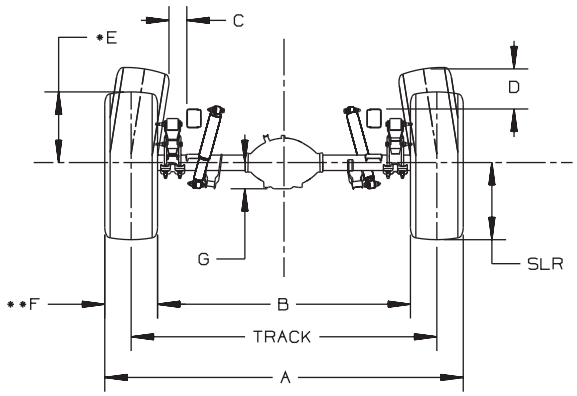

SECTION B-B
ROTATED 90

RING GEAR	G
[18.6] DIA	139.0 [5.47]
[19.5] DIA	160.0 [6.30]

A = TRACK + F
B = TRACK - F

* MAX GROWN TIRE RADIUS ON NARROWEST RIM
** MAX GROWN TIRE WIDTH ON WIDEST RIM
TIRE CHAINS NOT INCLUDED

VYU = SNOW PLOW
Z83 = CHASSIS PACKAGE SOLID SMOOTH RIDE
Z85 = CHASSIS PACKAGE INCREASED CAPACITY
E63 = BODY EQUIPMENT FLEETSIDE PICKUP BOX
Z71 = CHASSIS PACKAGE OFF ROAD

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES(2007)

[ ]= INCHES

ANB46140.5

FULL SIZE C/K LD PICKUPS

Rear Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	-A-	-B-	-C-	-D-	-E-	-F-
CK15703	Z83/Z85/E63	369	P265/65R18	6400	SINGLE	1701.8	31.0	1986.9	1414.9	119.9	234.9	408.5	286.0
CK15703	Z83/Z85/E63	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	123.7	171.2	410.0	281.0
CK15703	Z83/Z85/E63	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.3	228.9	393.9	266.0
CK15703	Z83/Z85/E63	367	P275/55R20	6400	SINGLE	1701.8	31.0	1999.0	1403.0	112.3	244.3	410.0	298.0
CK15703	VYU/Z83/Z85/E63	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.6	229.7	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15753	Z83/Z85/E63/Z71/Z60	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	6800	SINGLE	1701.8	31.0	1982.8	1420.8	122.1	236.7	380.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	6800	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15753	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	396.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15753	Z83/Z85/E63/Z71/Z60	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
K15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1701.8	31.0	1982.8	1420.8	122.1	236.7	380.0	281.0
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15753	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7200	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
K15753	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7200	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15753	Z83/Z85/E63/Z71/Z60	363	P275/55R20	7200	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15903	Z85/Z83/Z71/E63	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15903	Z85/Z83/Z71/E63	369	P265/65R18	6400	SINGLE	1701.8	31.0	1980.8	1418.8	118.8	241.3	410.0	281.0
C15903	Z85/Z83/Z71/E63	349	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15903	Z85/Z83/Z71/E63	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0
K15903	Z85/Z83/Z71/E63/VYU	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0
K15903	Z85/Z83/Z71/E63/VYU	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	122.1	236.8	408.5	286.0
K15903	Z85/Z83/Z71/E63/VYU	348	LT245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	365	P265/70R17	6800	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES(2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.6

FULL SIZE C/K LD PICKUPS

Rear Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	-A-	-B-	-C-	-D-	-E-	-F-
C15953	Z83/Z85/E63/Z71	367	P265/65R18	6900	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15953	Z83/Z85/E63/Z71	348	P245/70R17	6900	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15953	Z83/Z85/E63/Z71	365	P265/70R17	6900	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15953	Z83/Z85/E63/Z71	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15953	Z83/Z85/E63/Z71	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
K15953	Z83/Z85/E63/Z71	365	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15543	Z83/Z85/E63/Z71/Z60	348	LT245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	13.02	229.7	393.9	266.0
C15543	Z83/Z85/E63/Z71/Z60	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15543	Z83/Z85/E63/Z71/Z60	365	P265/70R17	6800	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	365	P275/55R20	6800	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15543	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15543	Z83/Z85/E63/Z71/Z60	364	P265/70R17	7100	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	363	P265/65R18	7100	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15543	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	299.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7300	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7300	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15543	Z83/Z85/E63/Z71/Z60	363	P275/55R20	7300	SINGLE	1701.9	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES(2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.7

C/K 15703 – Fuel Systems

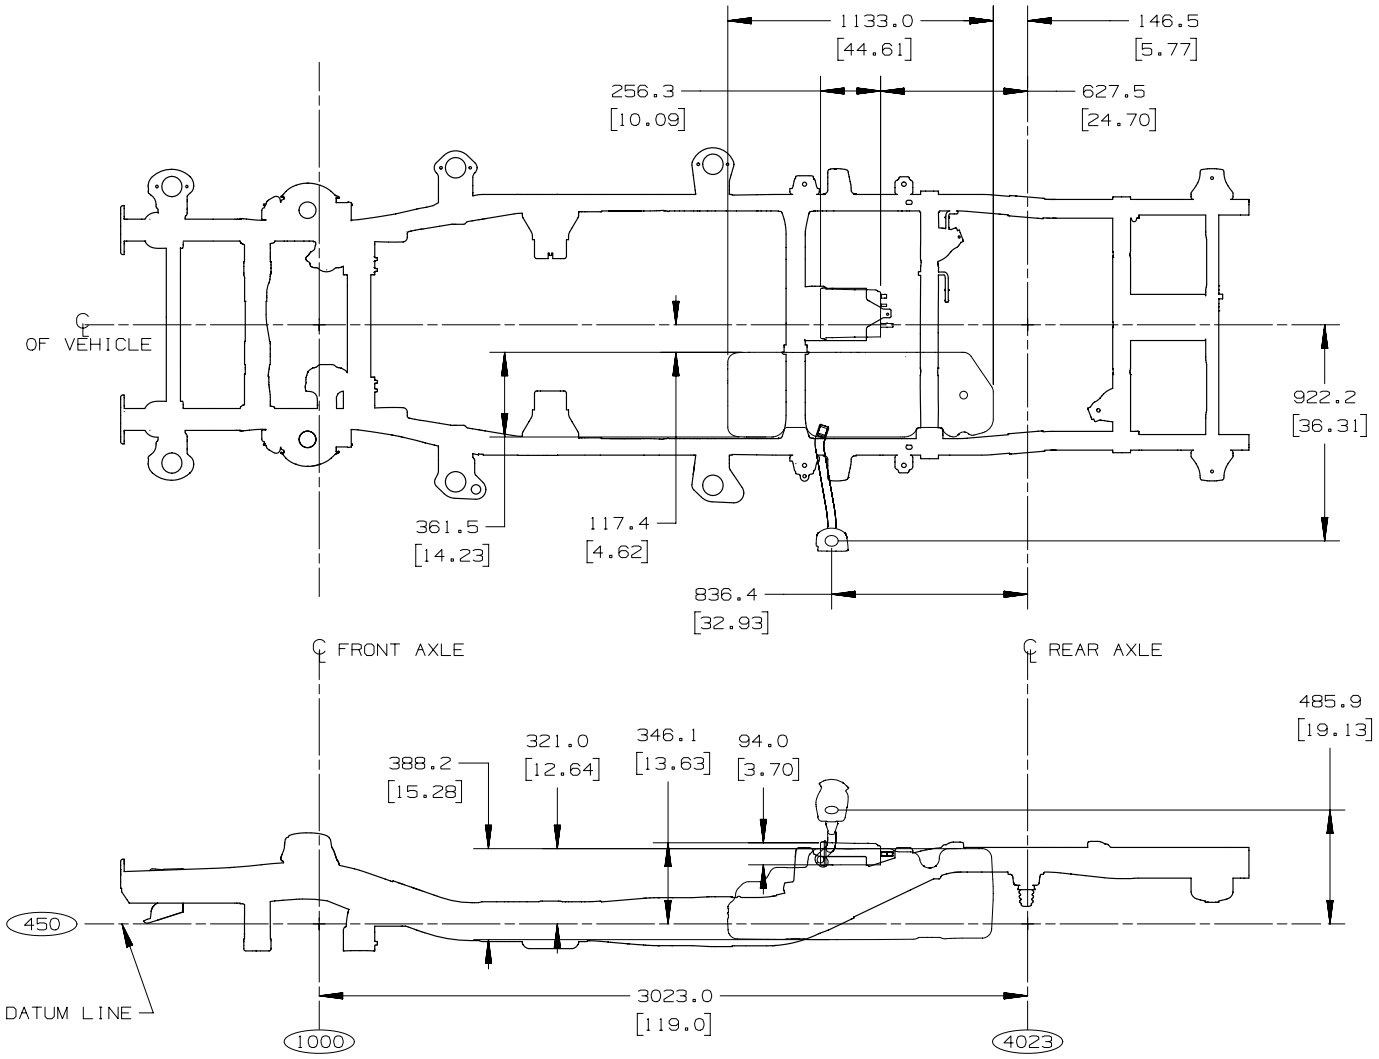

26 GALLON FUEL TANK
CK15703 2014

03DEC2012 AW

[ ]=INCHES

ANB49354.6

C/K 15903 Pickup – Fuel Systems

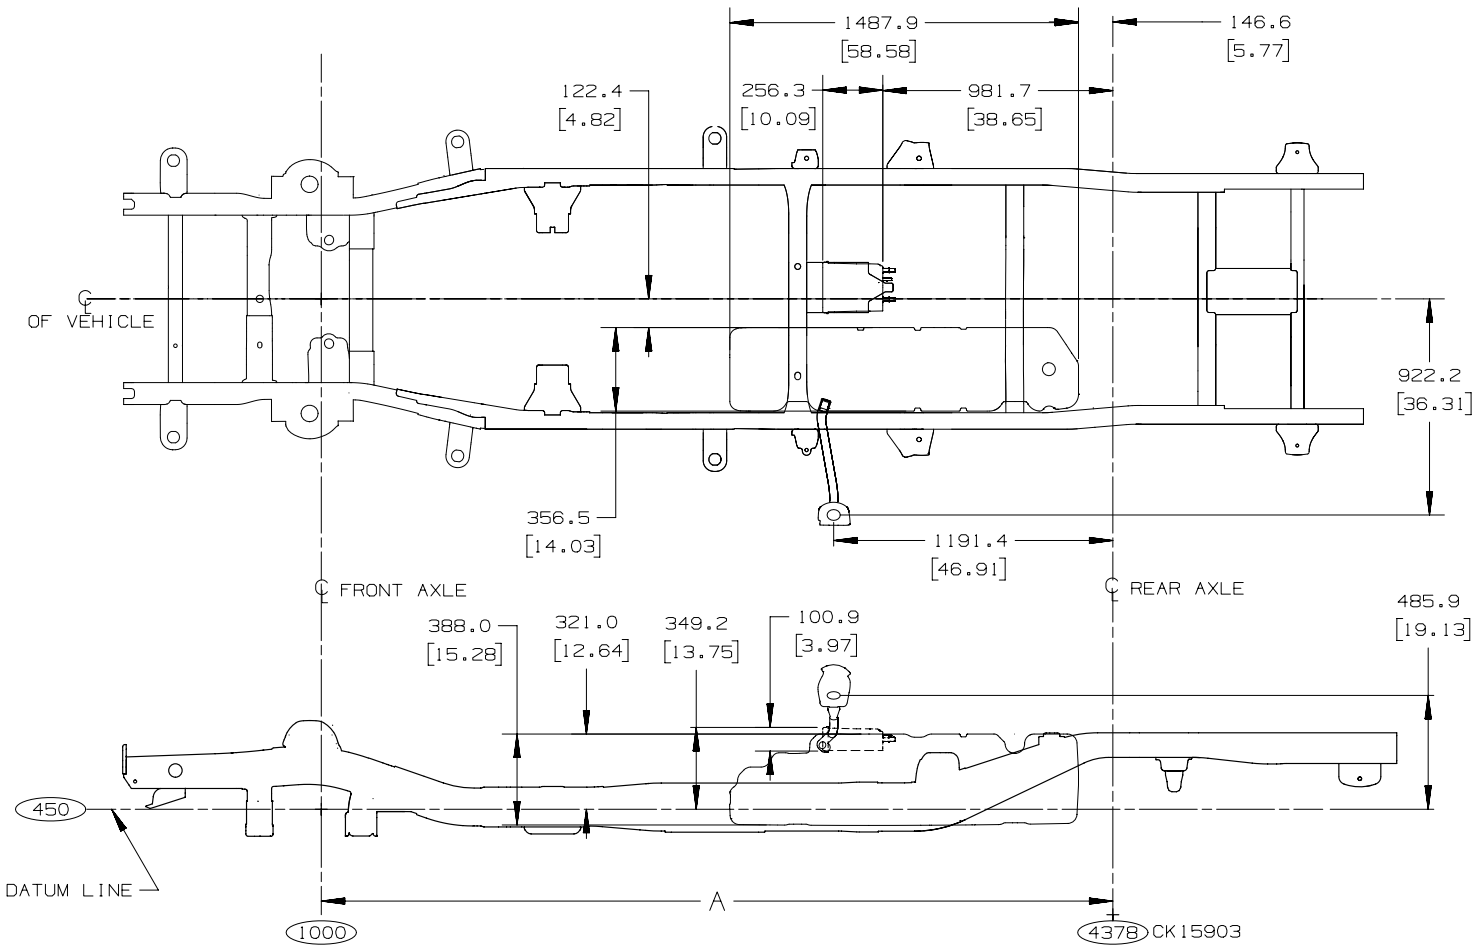

MODEL	A
CK15903	3378.0 [133.0]

34 GALLON FUEL TANK
CK15903 2012

SHOWN CK15903 03DEC2012 AW [ ]=INCHES ANB49354.7

FULL SIZE C/K LD PICKUPS

C/K 15743, 15753 and C/K 15543 Pickup – Fuel Systems

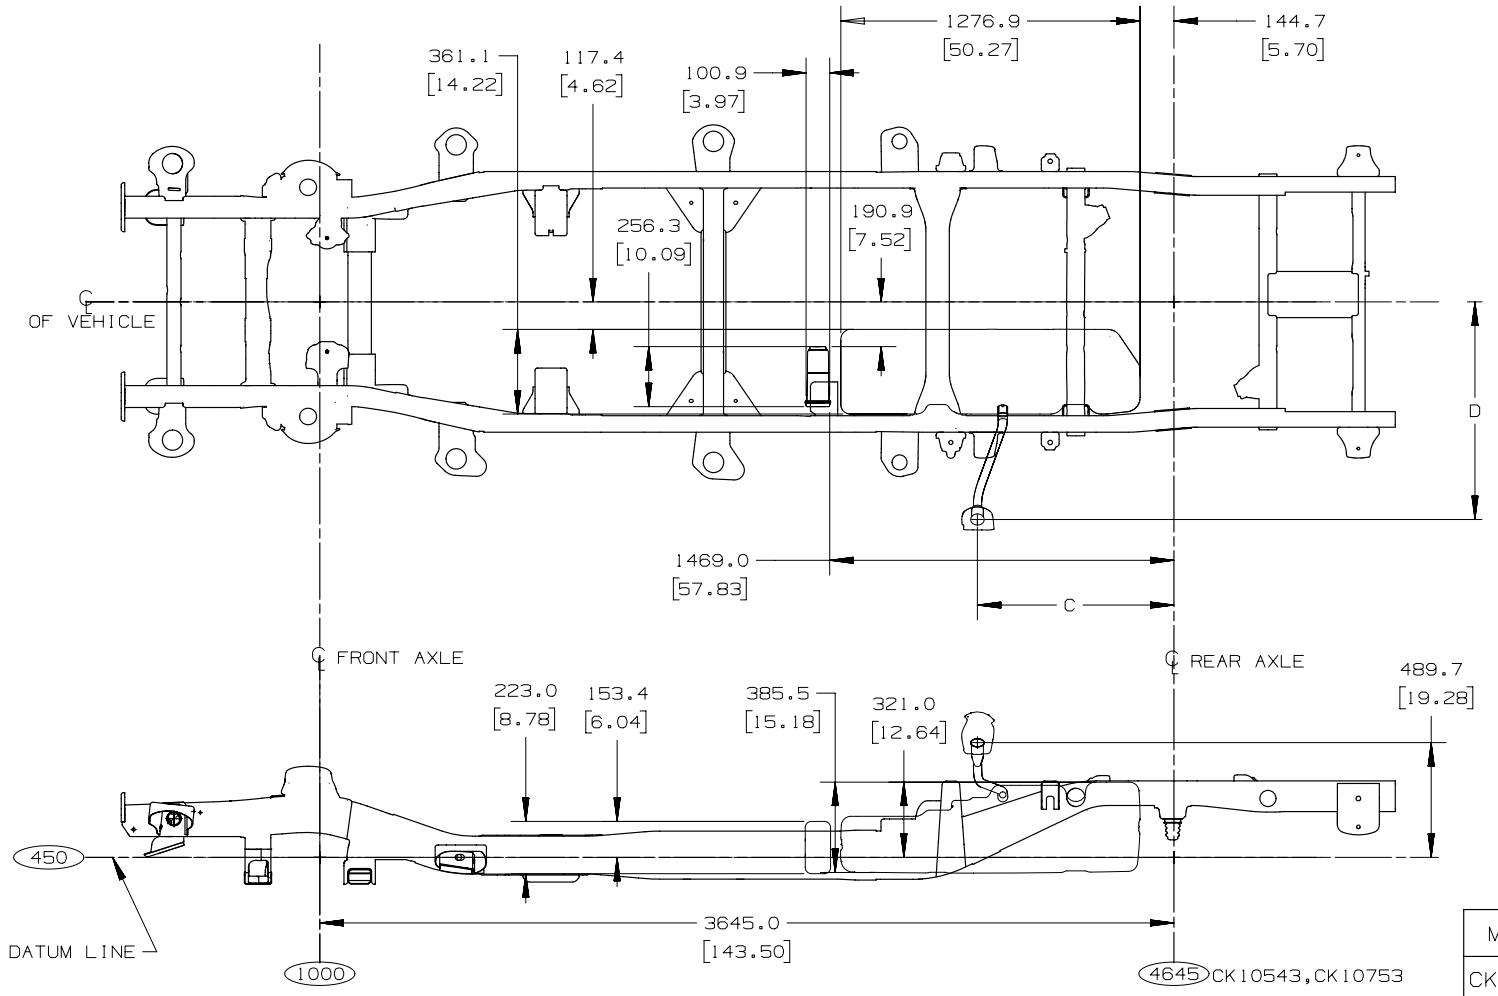

MODEL	C	D
CK15743	609.4 [24.01]	938.7 [36.95]
CK15753	838.9 [33.03]	928.8 [36.56]

26 GALLON FUEL TANK
CK15753 & CK15743 2012

SHOWN CK15753 03DEC2012 AW [ ]= INCHES ANB49354.8

C/K 100 (00) w/LV3 (4.3L V6) – Exhaust Systems

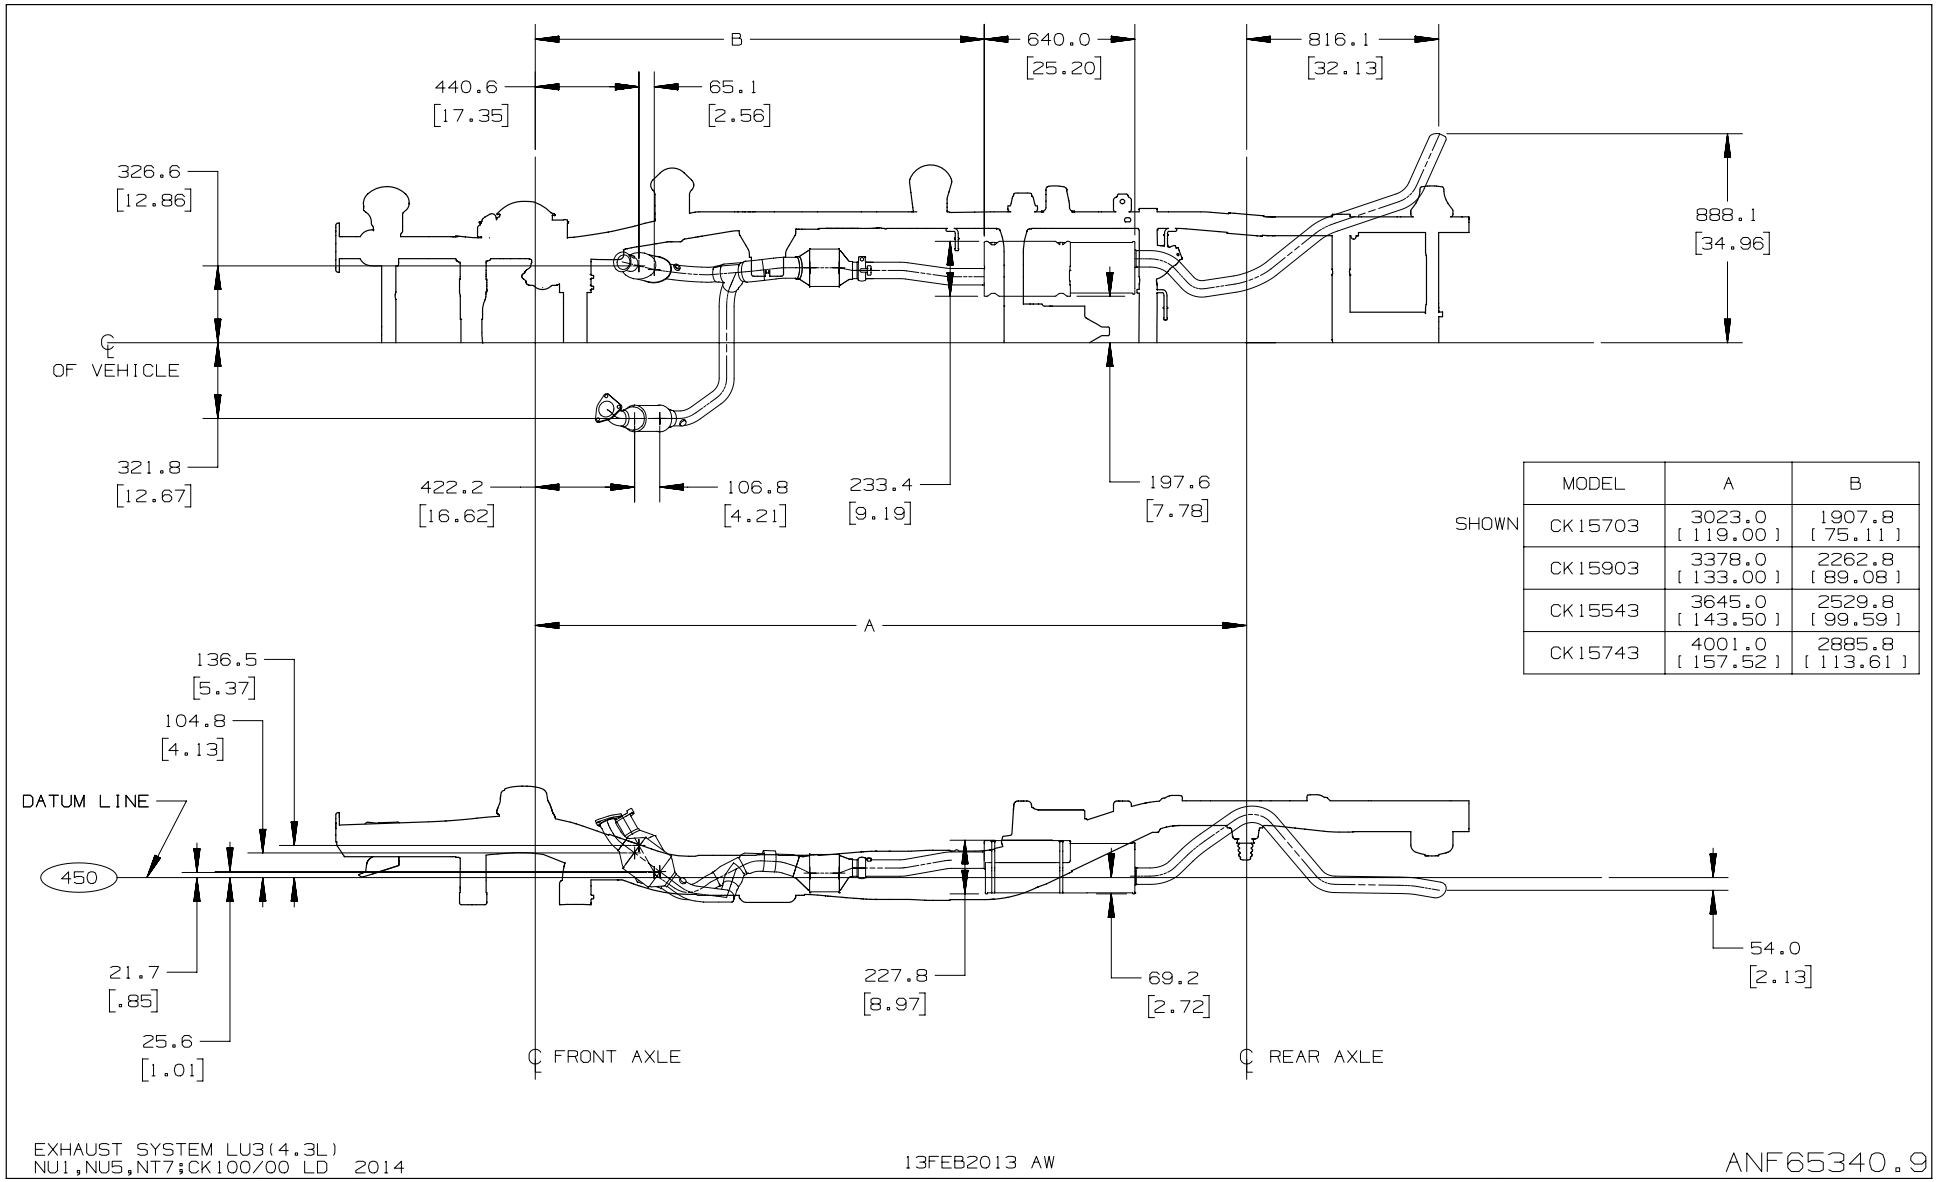

SHOWN

MODEL	A	B
CK15703	3023.0 [119.00]	1907.8 [75.11]
CK15903	3378.0 [133.00]	2262.8 [89.08]
CK15543	3645.0 [143.50]	2529.8 [99.59]
CK15743	4001.0 [157.52]	2885.8 [113.61]

EXHAUST SYSTEM LU3(4.3L)
NU1,NU5,NT7;CK100/00 LD 2014

13FEB2013 AW

ANF65340.9

FULL SIZE C/K LD PICKUPS

C/K 100 (00) w/L83 & (5.3L V-8) – Exhaust Systems

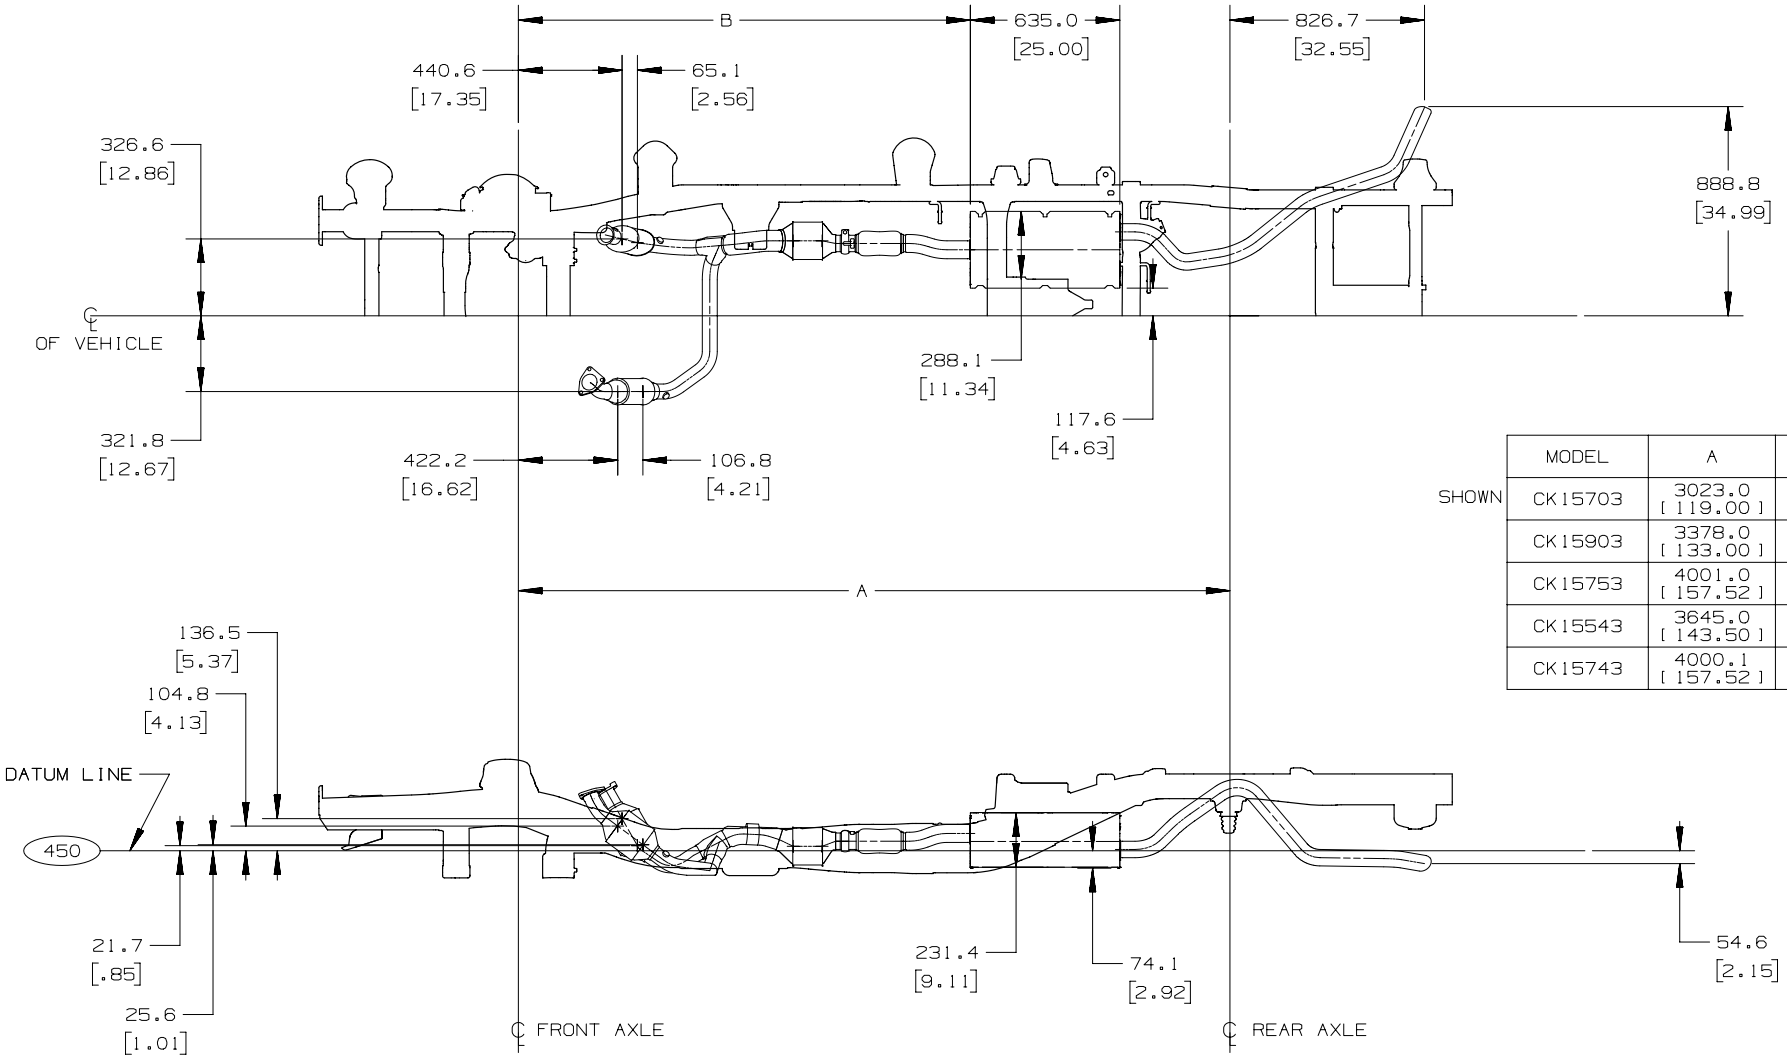

	MODEL	A	B
SHOWN	CK15703	3023.0 [119.00]	1920.2 [75.59]
	CK15903	3378.0 [133.00]	2275.2 [89.57]
	CK15753	4001.0 [157.52]	2898.2 [114.10]
	CK15543	3645.0 [143.50]	2542.2 [100.09]
	CK15743	4000.1 [157.52]	2898.2 [114.10]

EXHAUST SYSTEM L83 (5.3L)
NU1,NU5,NT7;CK100/00 LD 2014

14FEB2013 AW

ANF65340.11

FULL SIZE C/K LD PICKUPS

C/K 100 (00) w/L86 (6.2L V-8) – Exhaust Systems

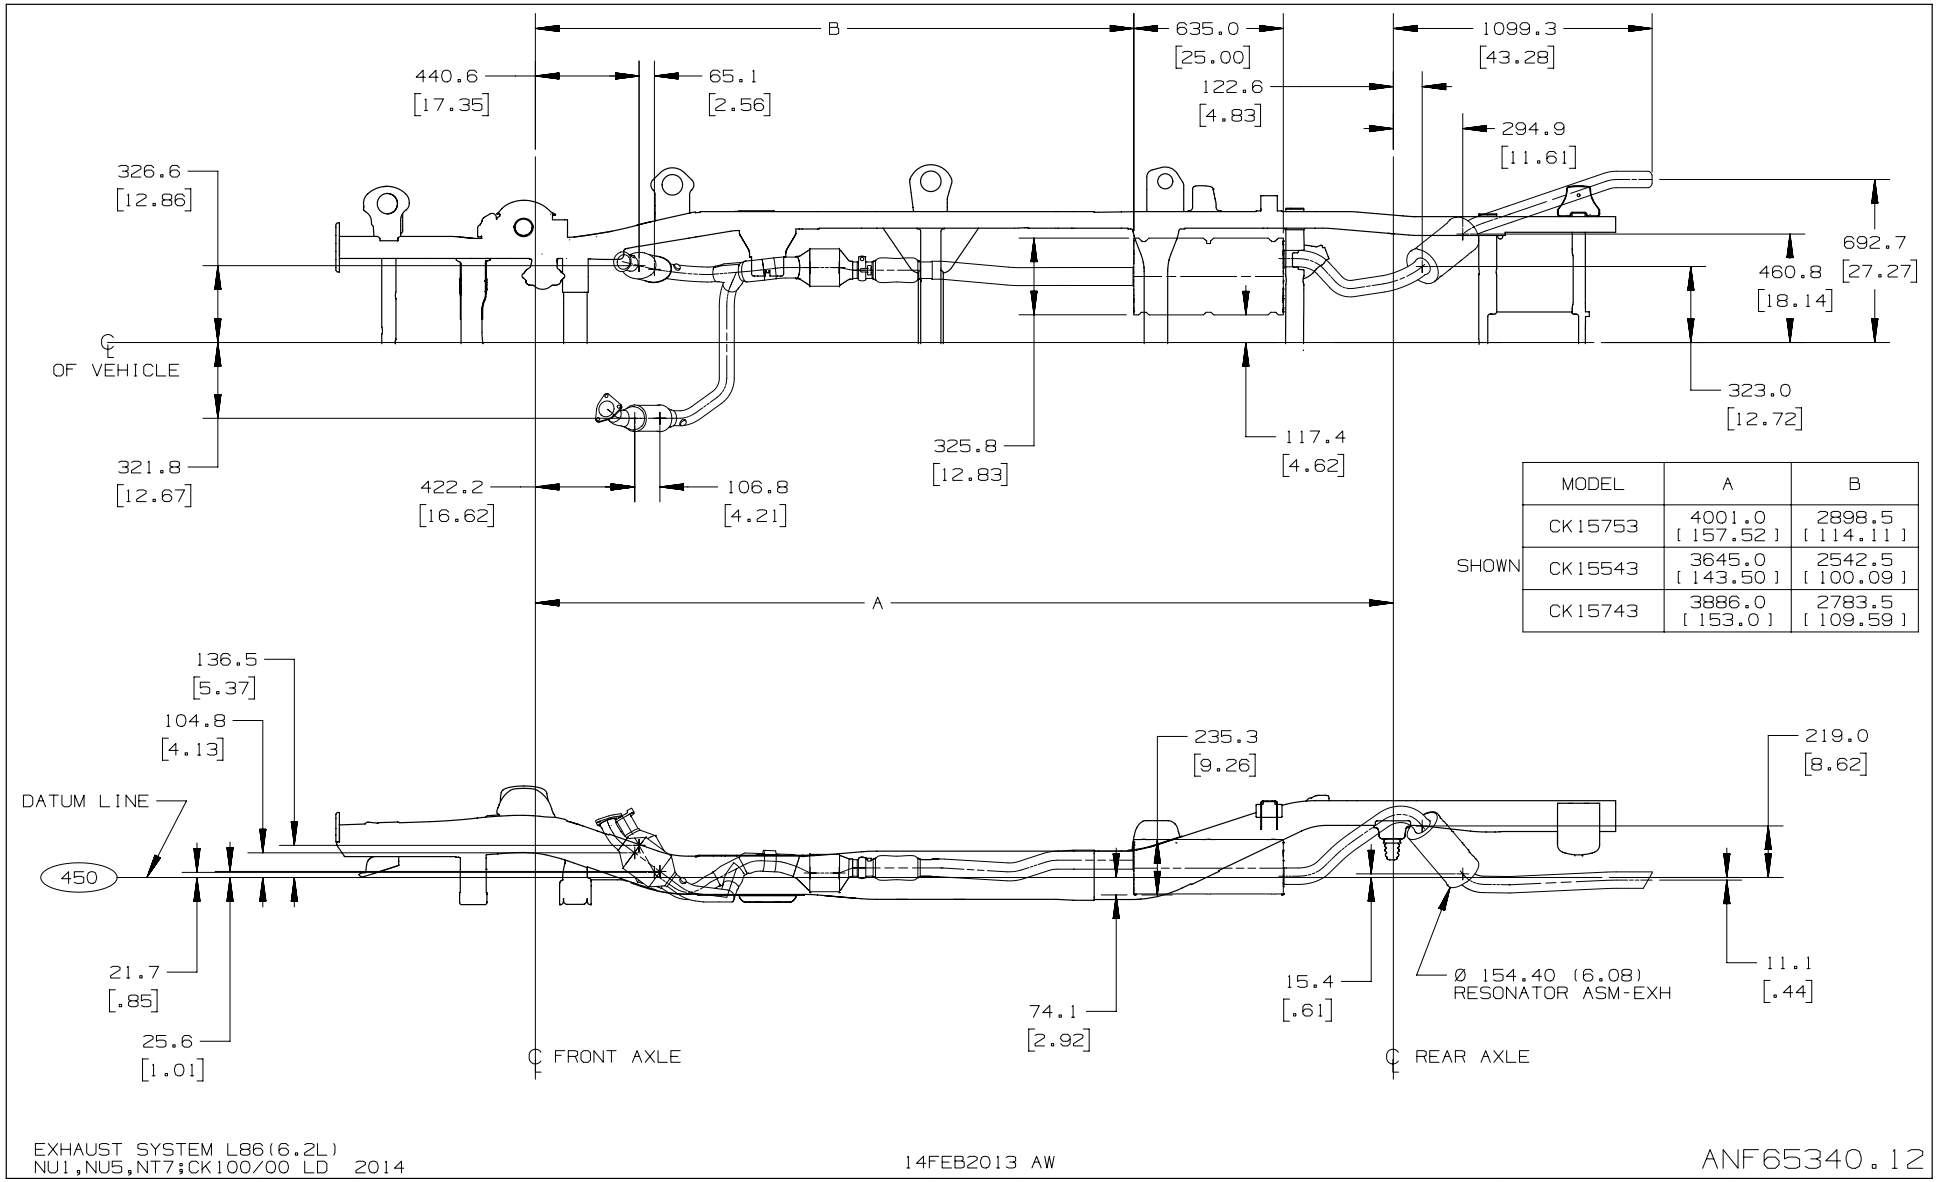

SHOWN

MODEL	A	B
CK15753	4001.0 [157.52]	2898.5 [114.11]
CK15543	3645.0 [143.50]	2542.5 [100.09]
CK15743	3886.0 [153.0]	2783.5 [109.59]